
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



80 m³/h	5.7 psi	−4.9 psi	0.63–1.1 kW	62 dB(A)	16–18 kg
47 CFM	0.39 bar	−0.34 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION **Single stage**	COMPRESSION **Oil-free**	USE **Vacuum pump or compressor**	MOTOR **50/60 Hz, class F, IP55**
MOTOR PROTECTION **Thermal (bimetal), standard**	VARIABLE SPEED **Frequency converter allowed**	AMBIENT / INLET **−25 to 40 °C**	MAX. ALTITUDE **1000 m**

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0065-1MT550-6	50	0.55	200-240 Δ / 345-415 Y	Δ 3.4 / Y 1.8	66 m³/h 39 CFM	−3.6 psi −0.25 bar	3.6 psi 0.25 bar	57	16
	60	0.63	220-275 Δ / 380-480 Y	Δ 3.7 / Y 2.1	80 m³/h 47 CFM	−3.8 psi −0.26 bar	3.6 psi 0.25 bar	62	
STRP0065-1MT810-6	50	0.81	200-240 Δ / 345-415 Y	Δ 4.0 / Y 2.3	66 m³/h 39 CFM	−4.1 psi −0.28 bar	5.1 psi 0.35 bar	57	17
	60	0.94	220-275 Δ / 380-480 Y	Δ 4.0 / Y 2.3	80 m³/h 47 CFM	−4.9 psi −0.34 bar	5.2 psi 0.36 bar	62	
STRP0065-1MA940-1	50	0.94	230	9	66 m³/h 39 CFM	−3.6 psi −0.25 bar	5.1 psi 0.35 bar	57	18
	60	1.1	230	9	80 m³/h 47 CFM	−4.1 psi −0.28 bar	5.7 psi 0.39 bar	62	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

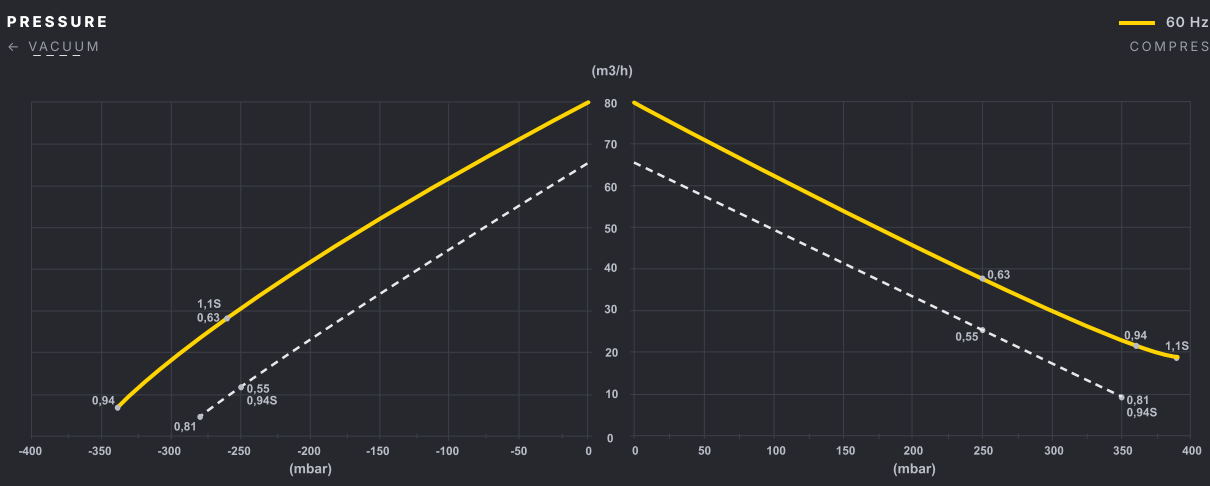

POWER VS PRESSURE

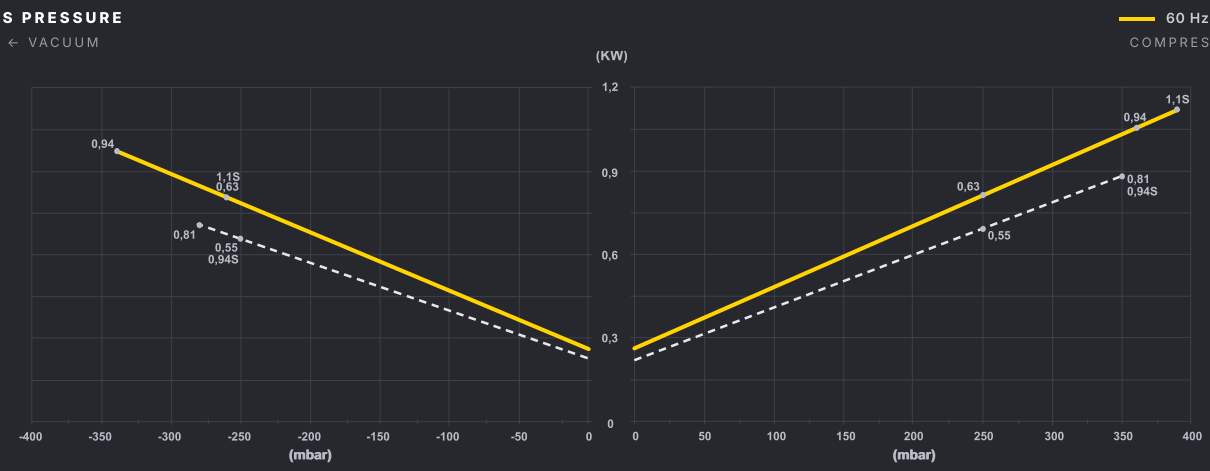

TEMPERATURE RISE VS PRESSURE

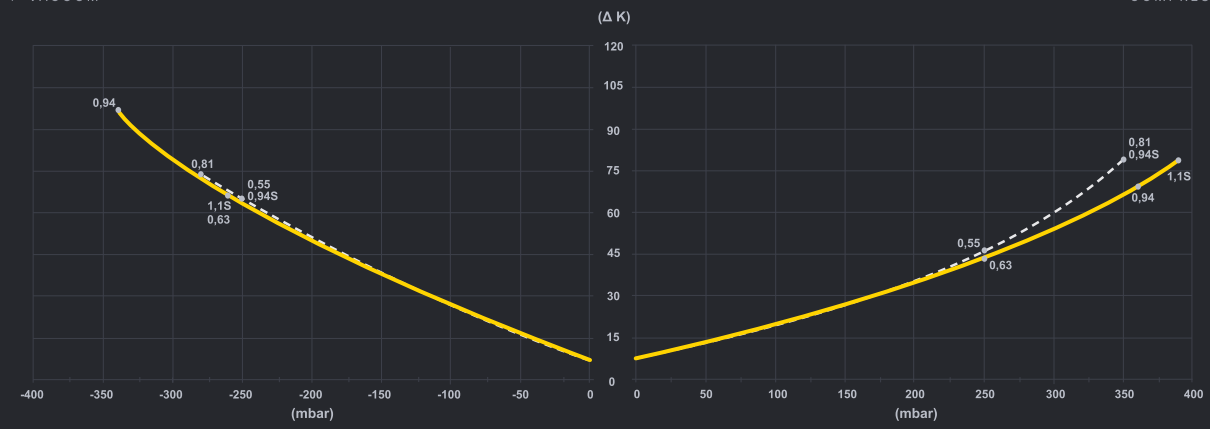


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

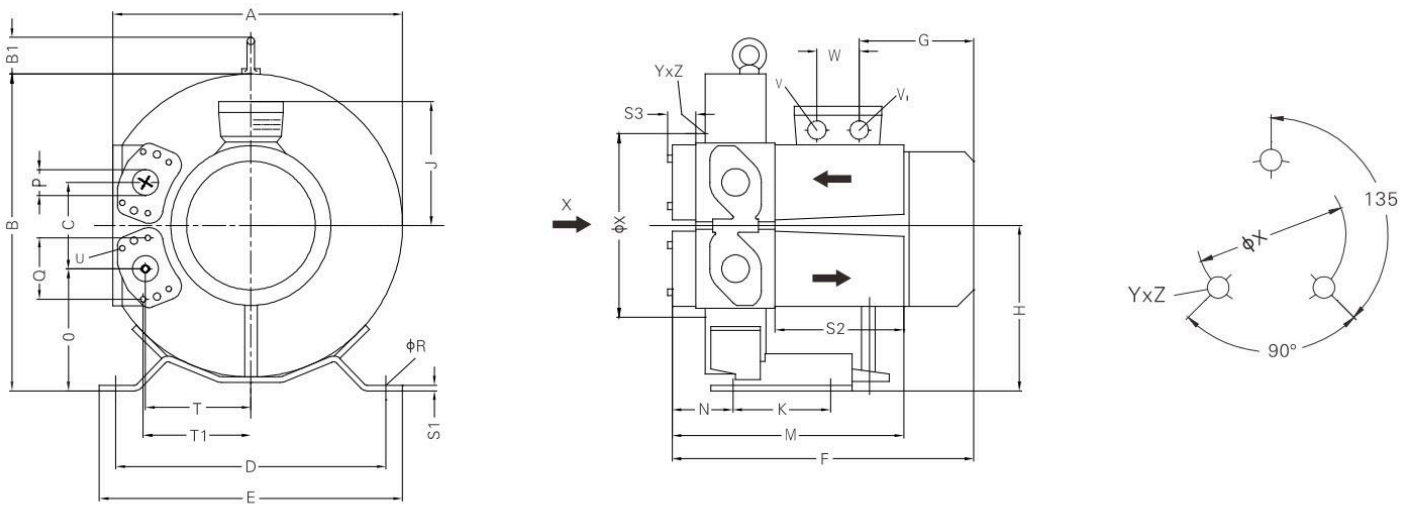

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0065-1MT550-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MT810-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MA940-1	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	Y	x	Z
STRP0065-1MT550-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6	X	15
STRP0065-1MT810-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6	X	15
STRP0065-1MA940-1	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6	X	15

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved