HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



76 m³/h	8.7 psi	−8.1 psi	1.3–1.75 kW	63 dB(A)	29–32 kg
45 CFM	0.60 bar	−0.56 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0065-2ST111-6	50	1.1	200-240 Δ / 345-415 Y	Δ 5.4 / Y 3.1	65 m³/h 38 CFM	−5.8 psi −0.40 bar	7.0 psi 0.48 bar	59	29
	60	1.3	220-275 Δ / 380-480 Y	Δ 5.4 / Y 3.1	76 m³/h 45 CFM	−7.0 psi −0.48 bar	7.0 psi 0.48 bar	63	
STRP0065-2SA151-1	50	1.5	230	9.7	65 m³/h 38 CFM	−5.8 psi −0.40 bar	8.0 psi 0.55 bar	59	32
	60	1.75	230	10.3	76 m³/h 45 CFM	−5.7 psi −0.39 bar	7.8 psi 0.54 bar	63	
STRP0065-2ST151-6	50	1.5	200-240 Δ / 345-415 Y	Δ 7.5 / Y 4.3	65 m³/h 38 CFM	−6.4 psi −0.44 bar	7.8 psi 0.54 bar	59	30
	60	1.75	220-275 Δ / 380-480 Y	Δ 7.6 / Y 4.4	76 m³/h 45 CFM	−8.1 psi −0.56 bar	8.7 psi 0.60 bar	63	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

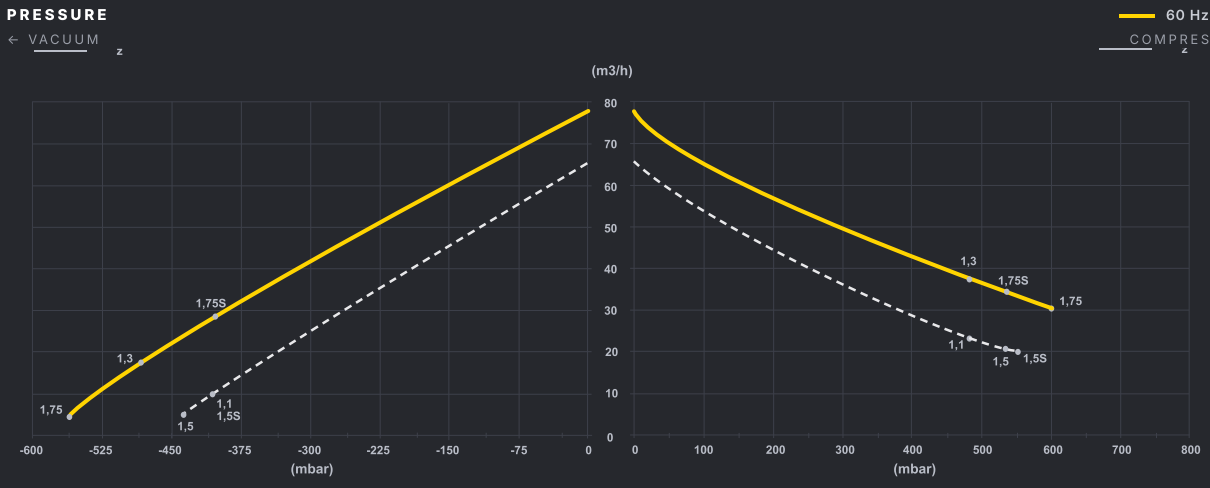

POWER VS PRESSURE

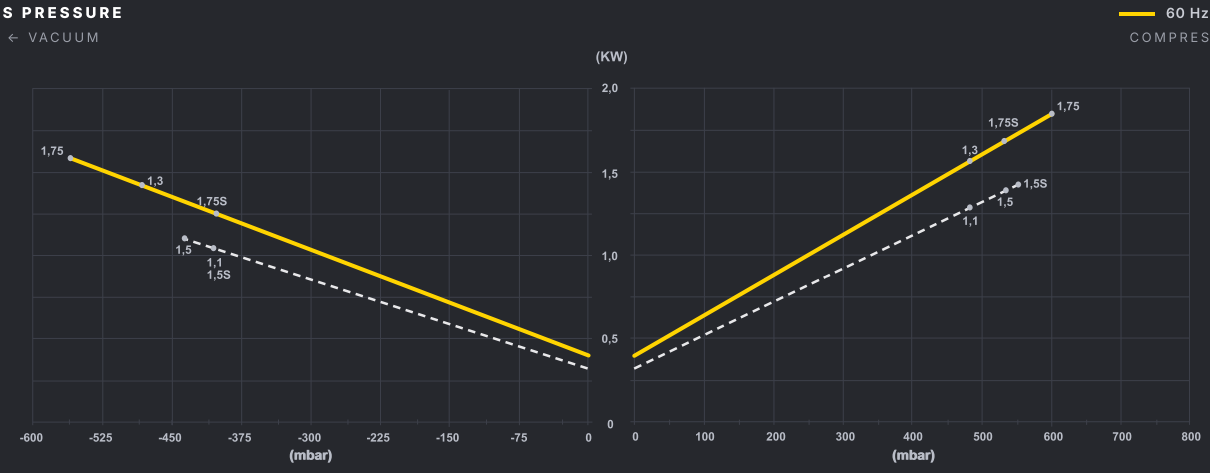

TEMPERATURE RISE VS PRESSURE

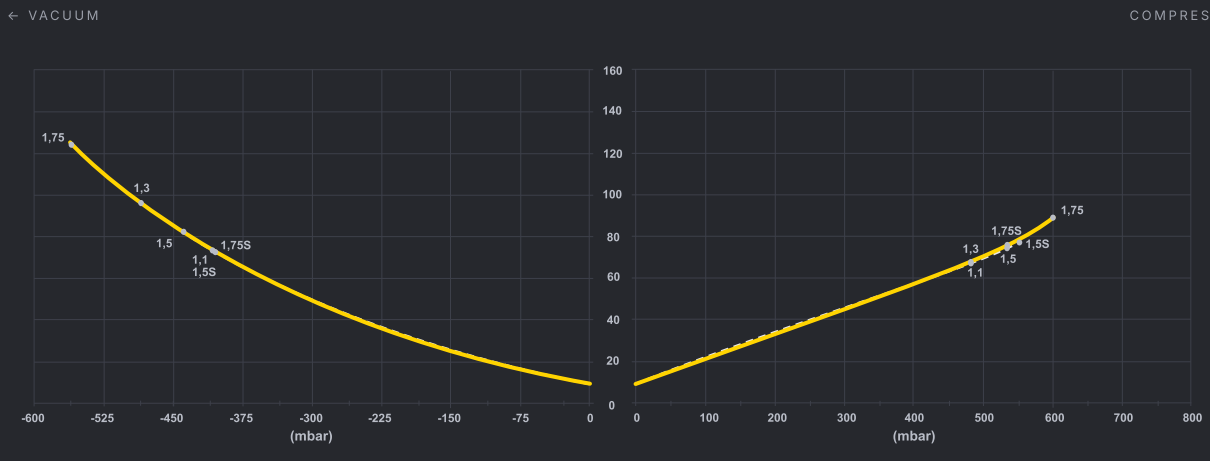



Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

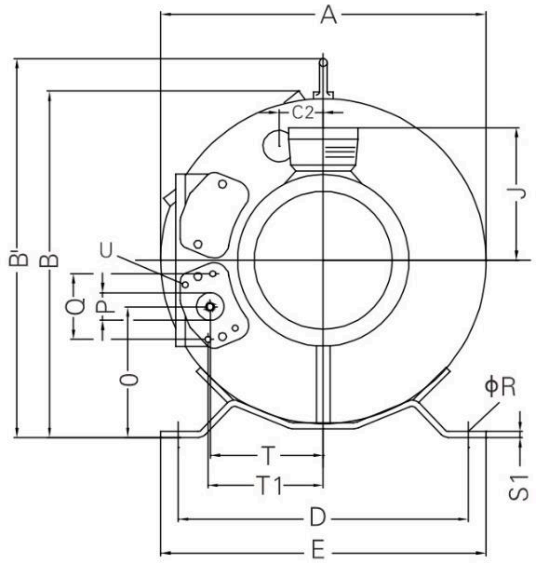

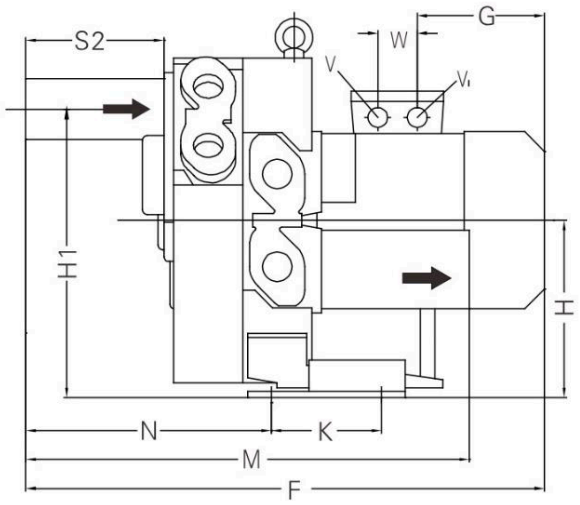

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0065-2ST111-6	331	345	380	47	290	325	390	153	177	291	120	105	431	243	130	G1 ¼"
STRP0065-2SA151-1	331	345	380	47	290	325	421	185	177	291	128	105	431	243	130	G1 ¼"
STRP0065-2ST151-6	331	345	380	47	290	325	421	185	177	291	128	105	431	243	130	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0065-2ST111-6	64	14	4	140	31	114	116	M6 × 17	M25 × 1.5	M16 × 1.5	32
STRP0065-2SA151-1	64	14	4	140	31	114	116	M6 × 17	M25 × 1.5	M25 × 1.5	32
STRP0065-2ST151-6	64	14	4	140	31	114	116	M6 × 17	M25 × 1.5	M16 × 1.5	32

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved