HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



105 m³/h	12.3 psi	−7.4 psi	1.75–3.8 kW	66 dB(A)	33–39 kg
62 CFM	0.85 bar	−0.51 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0085-2ST151-6	50	1.5	200-240 Δ / 345-415 Y	Δ 7.5 / Y 4.3	87 m³/h 51 CFM	−7.0 psi −0.48 bar	6.5 psi 0.45 bar	61	33
	60	1.75	220-275 Δ / 380-480 Y	Δ 7.6 / Y 4.4	105 m³/h 62 CFM	−6.2 psi −0.43 bar	5.9 psi 0.41 bar	66	
STRP0085-2ST331-6	50	3.3	200-240 Δ / 345-415 Y	Δ 13.0 / Y 7.5	87 m³/h 51 CFM	−7.3 psi −0.50 bar	10.9 psi 0.75 bar	61	39
	60	3.8	220-275 Δ / 380-480 Y	Δ 13.8 / Y 8.0	105 m³/h 62 CFM	−7.4 psi −0.51 bar	12.3 psi 0.85 bar	66	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

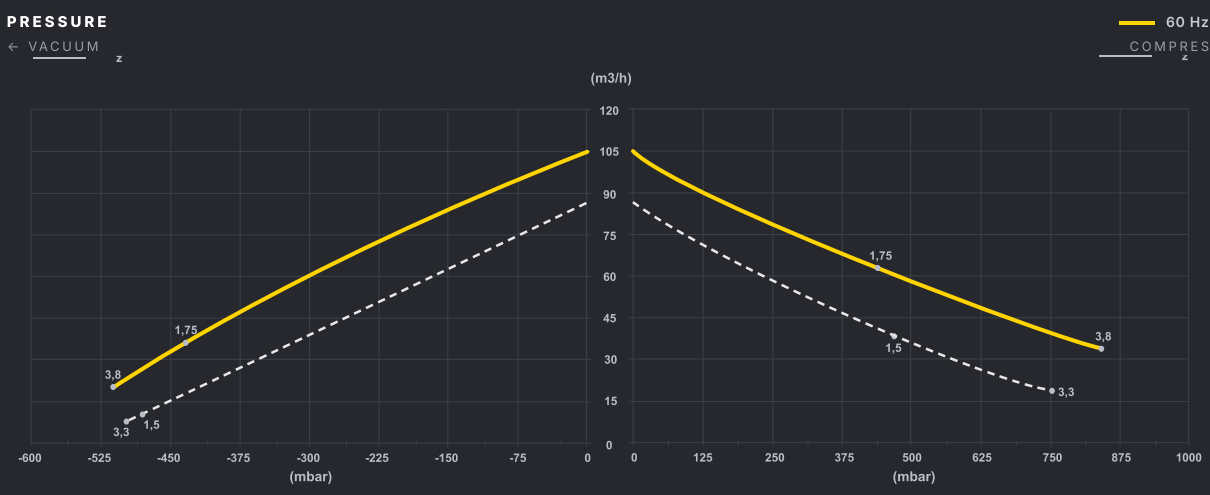

POWER VS PRESSURE

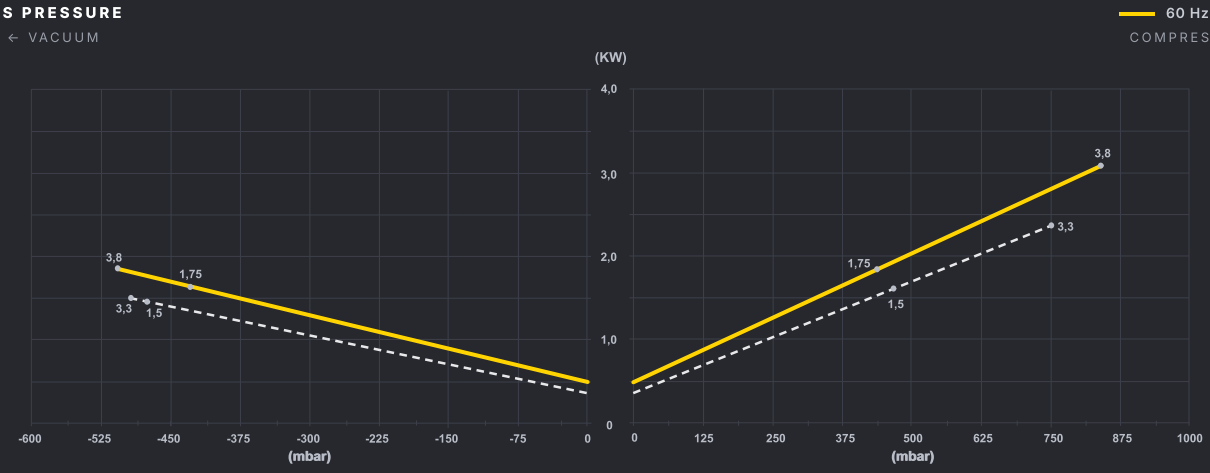

TEMPERATURE RISE VS PRESSURE

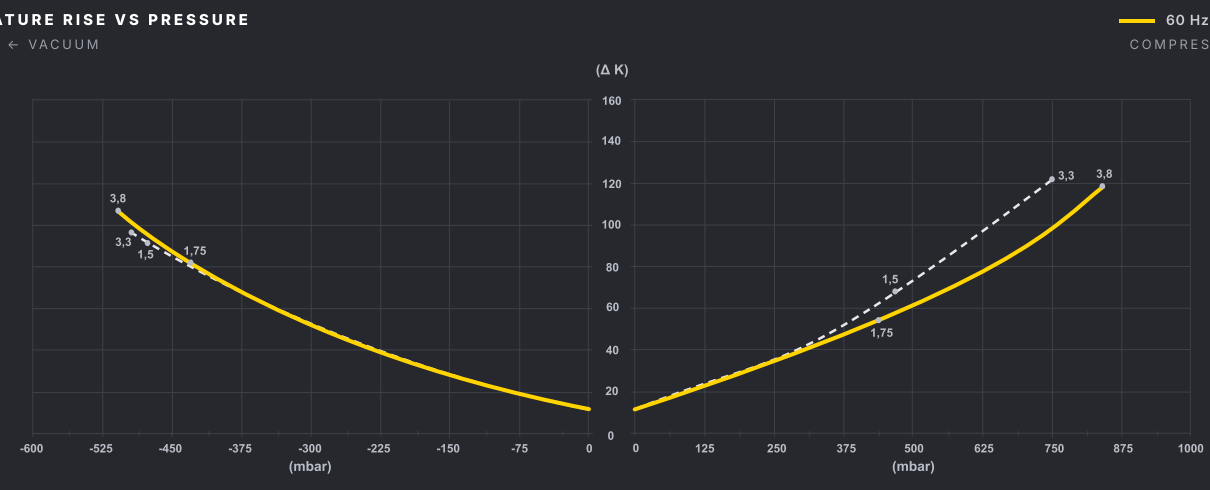



Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

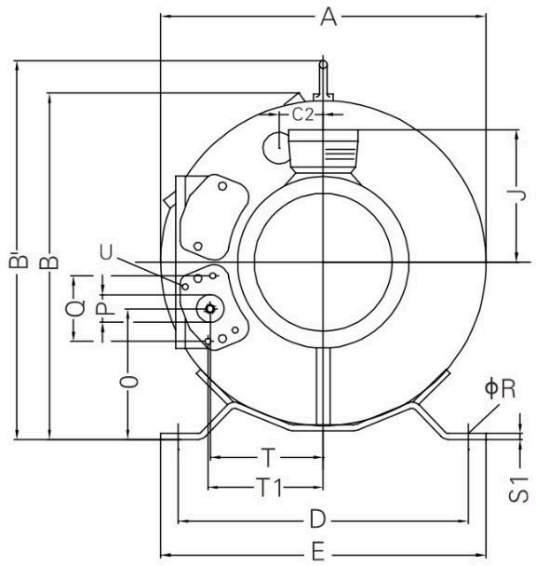

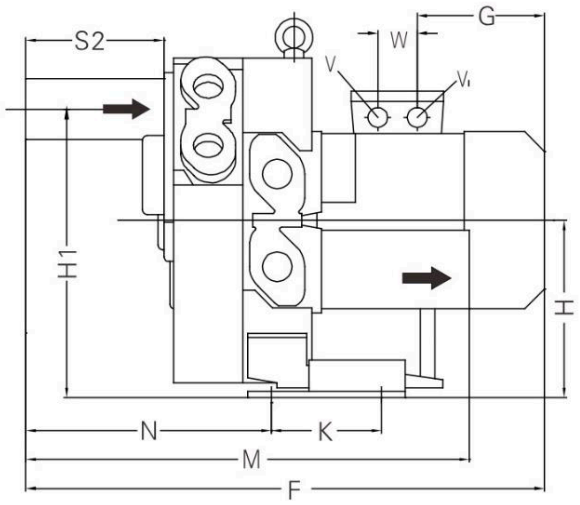

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0085-2ST151-6	363	377	414	52	315	350	529	180	195	319	128	130	436	243	143	G1 ¼"
STRP0085-2ST331-6	363	377	414	52	315	350	554	211	195	319	128	130	436	243	143	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0085-2ST151-6	64	14	4	140	31	125	127	M6 × 17	M25 × 1.5	M16 × 1.5	32
STRP0085-2ST331-6	64	14	4	140	31	125	127	M6 × 17	M25 × 1.5	M16 × 1.5	32

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved