
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



145 m³/h (85 CFM)	7.0 psi (0.48 bar)	−5.2 psi (−0.36 bar)	1.75–2.55 kW	68 dB(A)	26–29 kg
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
Single stage	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55

MOTOR PROTECTION	VARIABLE SPEED	AMBIENT / INLET	MAX. ALTITUDE
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0120-1MT151-6	50	1.5	200-240 Δ / 345-415 Y	Δ 7.5 / Y 4.3	120 m³/h (71 CFM)	−4.5 psi (−0.31 bar)	5.2 psi (0.36 bar)	64	26
	60	1.75	220-275 Δ / 380-480 Y	Δ 7.6 / Y 4.4	145 m³/h (85 CFM)	−4.9 psi (−0.34 bar)	4.6 psi (0.32 bar)	68	
STRP0120-1MT221-6	50	2.2	200-240 Δ / 345-415 Y	Δ 11.4 / Y 6.6	120 m³/h (71 CFM)	−4.5 psi (−0.31 bar)	6.8 psi (0.47 bar)	64	29
	60	2.55	220-275 Δ / 380-480 Y	Δ 11.2 / Y 6.5	145 m³/h (85 CFM)	−5.2 psi (−0.36 bar)	7.0 psi (0.48 bar)	68	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

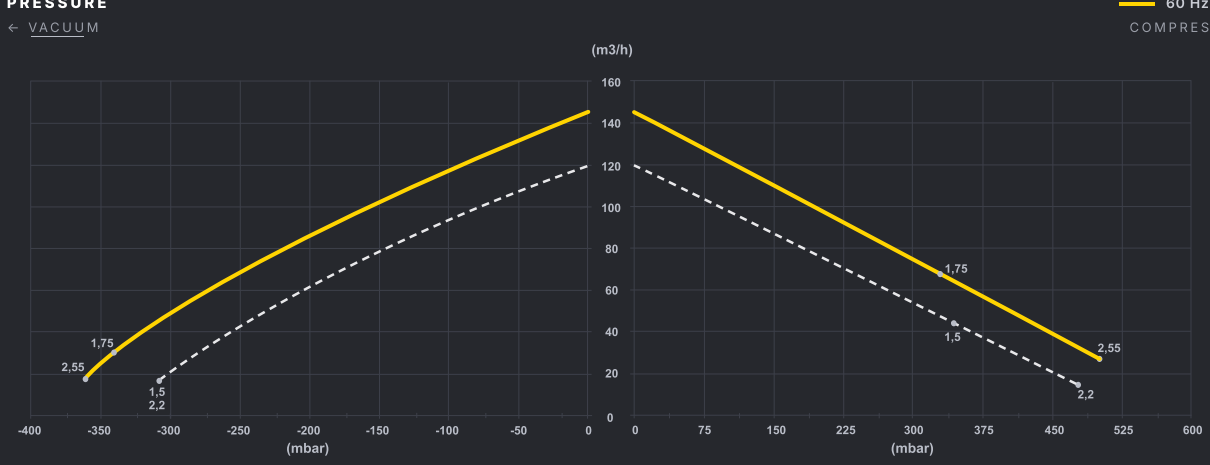

POWER VS PRESSURE

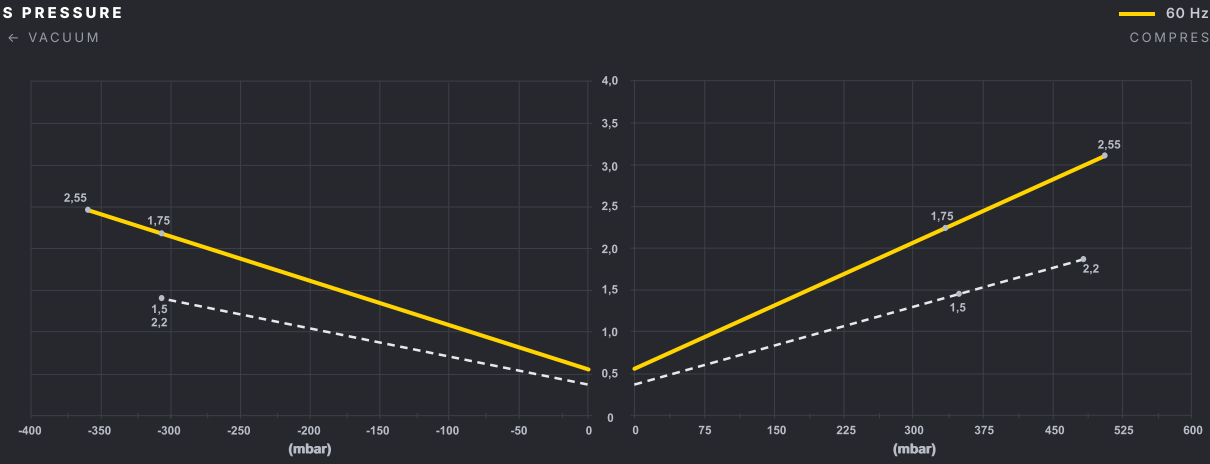

TEMPERATURE RISE VS PRESSURE

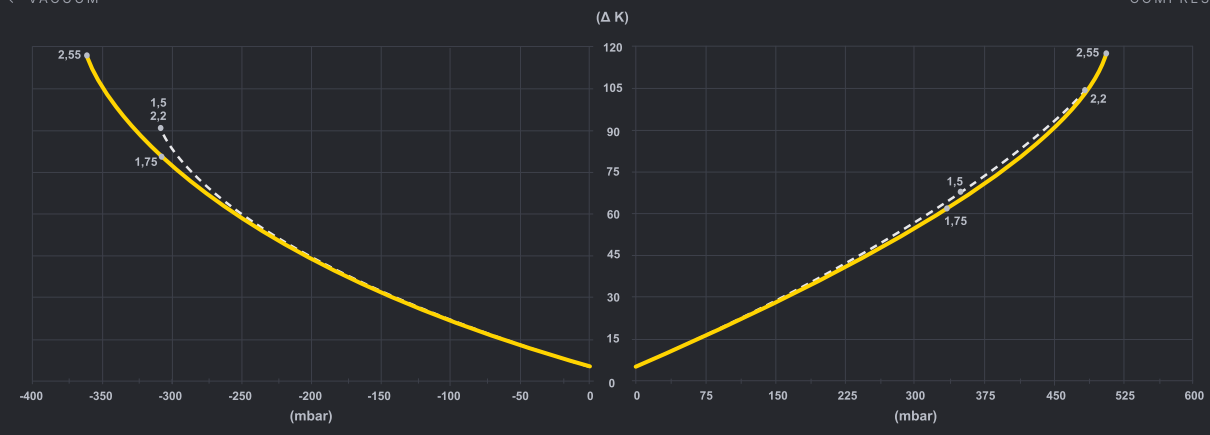


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

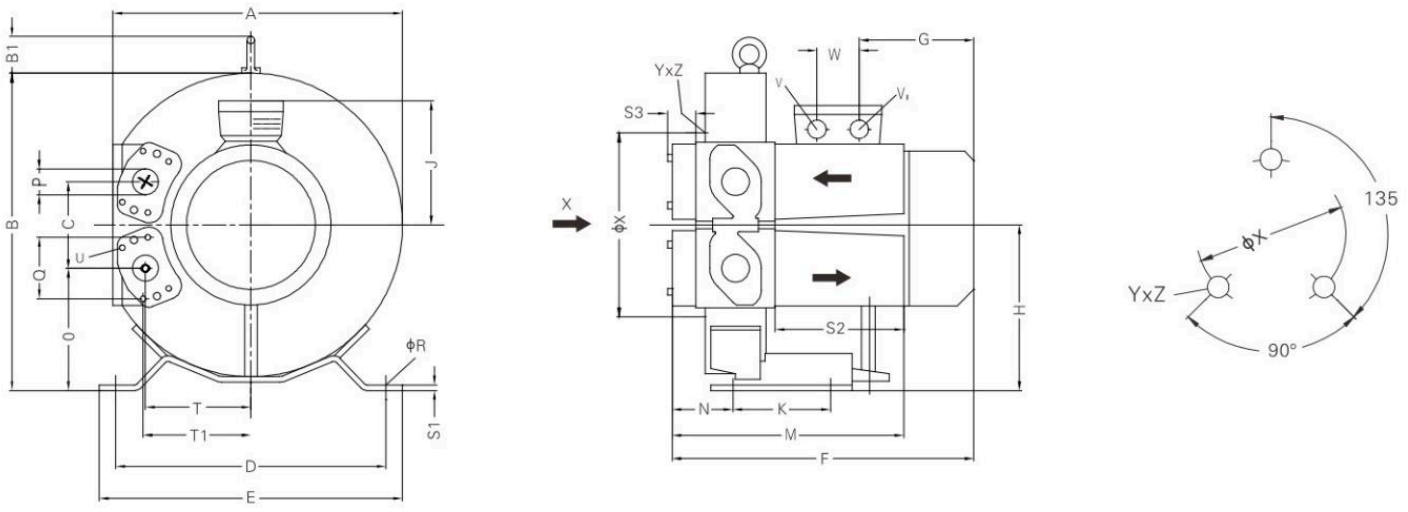

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0120-1MT151-6	368	395	39	114	328	363	361	185	205	128	152	265	68	148	G1 ¼"
STRP0120-1MT221-6	368	395	39	114	328	363	361	185	205	128	152	265	68	148	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	Y	x	Z
STRP0120-1MT151-6	64	14	4	140	31	137	138	M6	X 17	M16 X 1.5	32	192	M8	X	15
STRP0120-1MT221-6	64	14	4	140	31	137	138	M6	X 17	M16 X 1.5	32	192	M8	X	15

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved