HIGH-PERFORMANCE BLOWER · 3 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

147 m³/h	14.9 psi	−9.3 psi	4.6–6.3 kW	73 dB(A)	62–68 kg
87 CFM	1.03 bar	−0.64 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
3 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55

MOTOR PROTECTION	VARIABLE SPEED	AMBIENT / INLET	MAX. ALTITUDE
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0120-3ST401-7	50	4	345-415 Δ / 600-720 Y	Δ 9.0 / Y 4.4	122 m³/h 72 CFM	−9.9 psi −0.68 bar	11.9 psi 0.82 bar	67	62
	60	4.6	380-480 Δ / 660-720 Y	Δ 9.5 / Y 4.5	147 m³/h 87 CFM	−9.3 psi −0.64 bar	10.6 psi 0.73 bar	73	
STRP0120-3ST551-7	50	5.5	345-415 Δ / 600-720 Y	Δ 13.3 / Y 7.7	122 m³/h 72 CFM	−9.9 psi −0.68 bar	14.5 psi 1.00 bar	67	68
	60	6.3	380-480 Δ / 660-720 Y	Δ 13.3 / Y 7.7	147 m³/h 87 CFM	−9.3 psi −0.64 bar	14.9 psi 1.03 bar	73	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

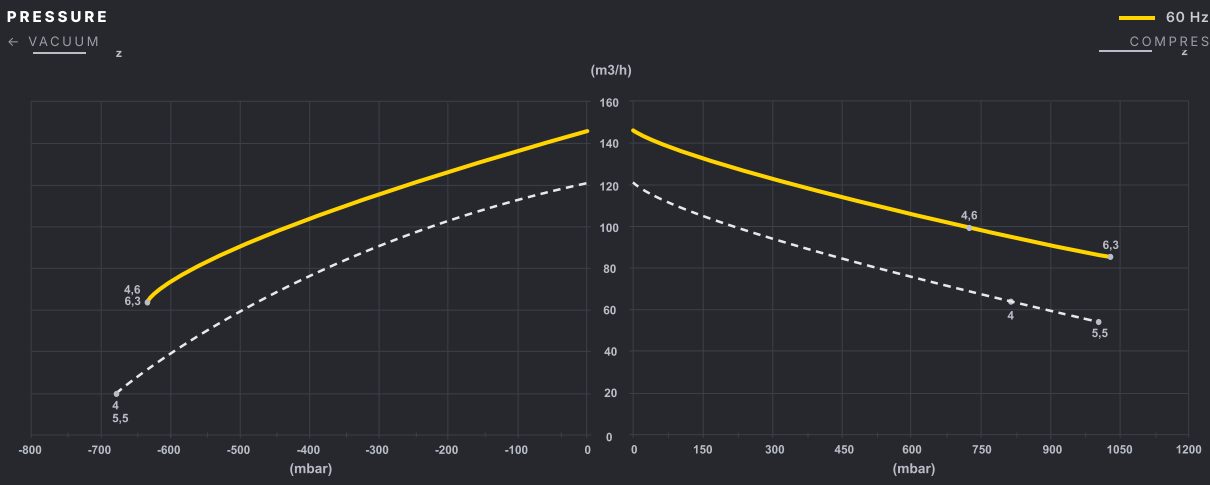

POWER VS PRESSURE

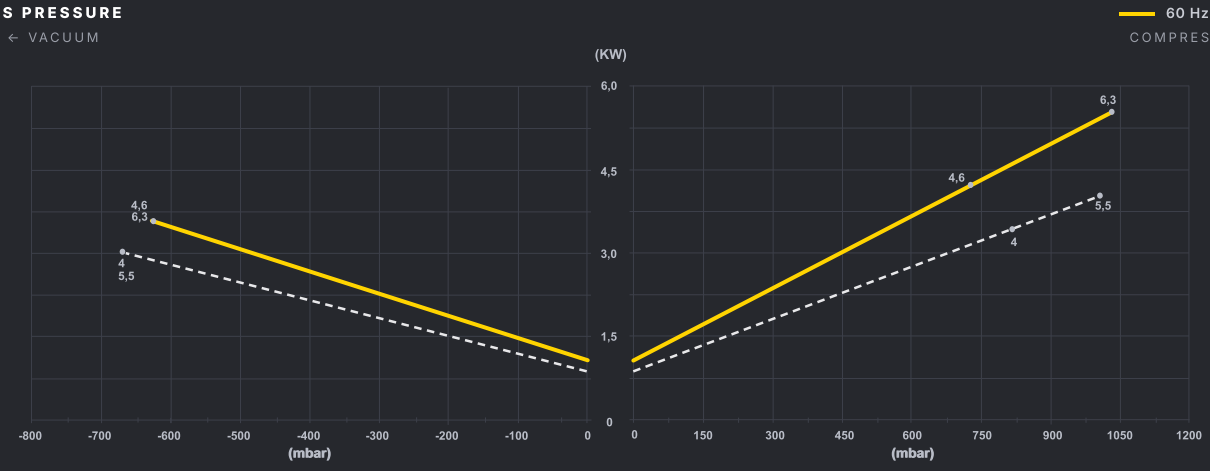

TEMPERATURE RISE VS PRESSURE

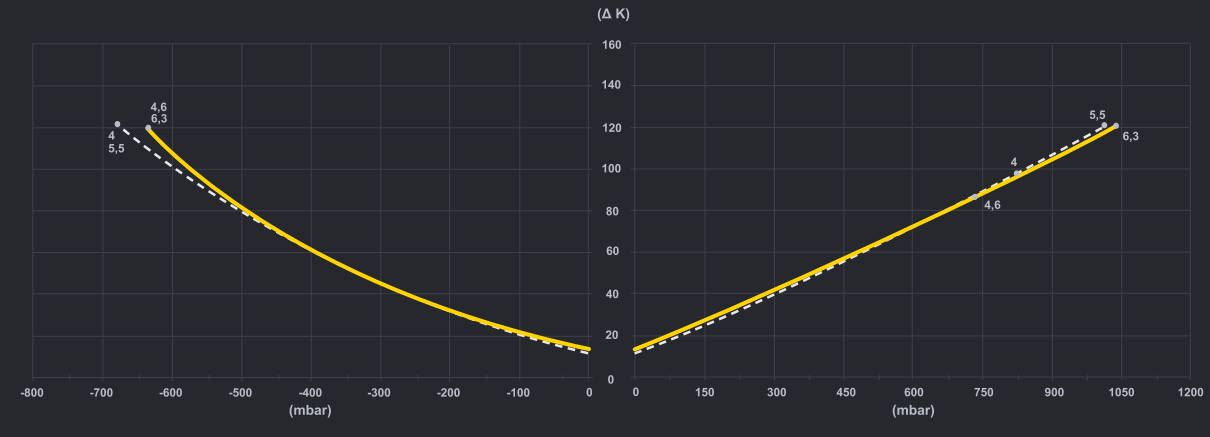


Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

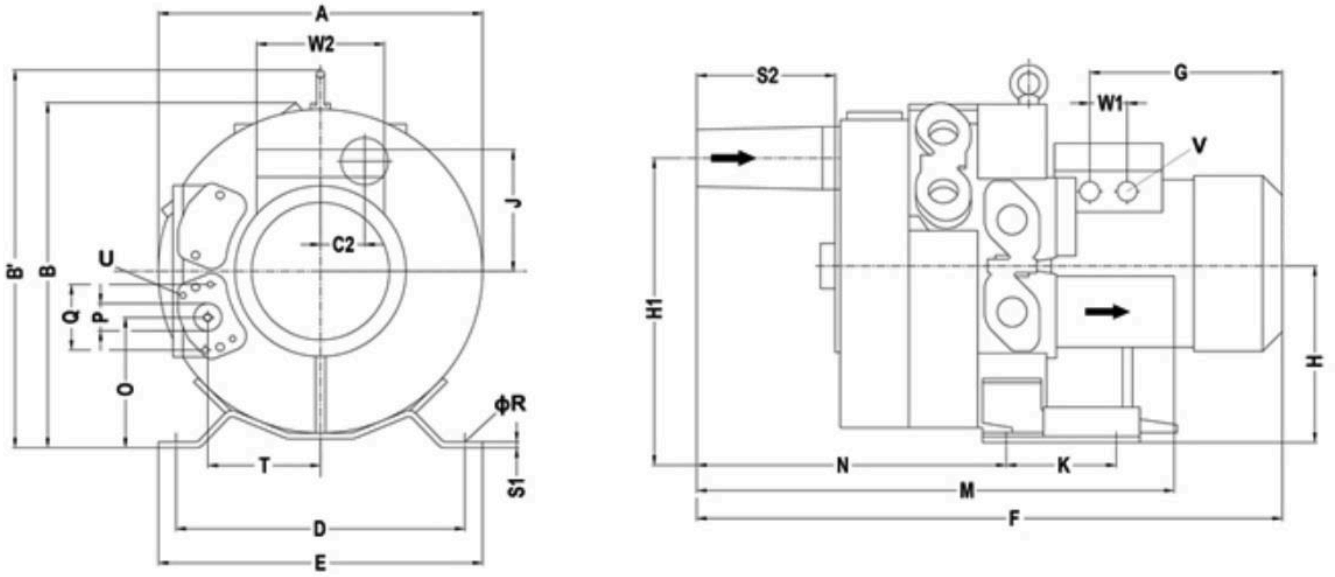

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0120-3ST401-7	387	402	432	57	328	363	682	252	206	344	148	152	532	333	149	G1 ¼"
STRP0120-3ST551-7	442	402	432	63	371	406	717	274	236	389	148	152	539	336	172	G1 ¼"

Type	Q	ØR	S1	S2	T	U	V	W1	W2
STRP0120-3ST401-7	64	14	5	143	137	M6 × 17	M32 × 1.5	42	120
STRP0120-3ST551-7	64	14	5	146	153	M6 × 17	M32 × 1.5	42	120

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved