HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



195 m³/h	12.2 psi	−7.0 psi	3.8–6.6 kW	72 dB(A)	48–65 kg
115 CFM	0.84 bar	−0.48 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

TECHNICAL DATA

CONFIGURATION	COMPRESSION	USE	MOTOR
2 stages, series	Oil-free	Vacuum pump or compressor	50/60 Hz, class F, IP55
MOTOR PROTECTION	**VARIABLE SPEED**	**AMBIENT / INLET**	**MAX. ALTITUDE**
Thermal (bimetal), standard	Frequency converter allowed	−25 to 40 °C	1000 m

MODELS


TYPE	HZ	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0165-2ST331-6	50	3.3	200-240 Δ / 345-415 Y	Δ 13.0 / Y 7.5	165 m³/h 97 CFM	−6.7 psi −0.46 bar	7.3 psi 0.50 bar	67	48
	60	3.8	220-275 Δ / 380-480 Y	Δ 14.2 / Y 8.2	195 m³/h 115 CFM	−7.0 psi −0.48 bar	6.1 psi 0.42 bar	71	
STRP0165-2ST571-7	50	5.7	345-415 Δ / 600-720 Y	Δ 12.5 / Y 6.2	165 m³/h 97 CFM	−6.7 psi −0.46 bar	10.7 psi 0.74 bar	68	65
	60	6.6	380-480 Δ / 660-720 Y	Δ 12.0 / Y 6.0	195 m³/h 115 CFM	−7.0 psi −0.48 bar	12.2 psi 0.84 bar	72	

Other voltages available on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


PERFORMANCE CURVES

Flow, power and temperature rise versus differential pressure, in vacuum and in compression.


FLOW VS PRESSURE

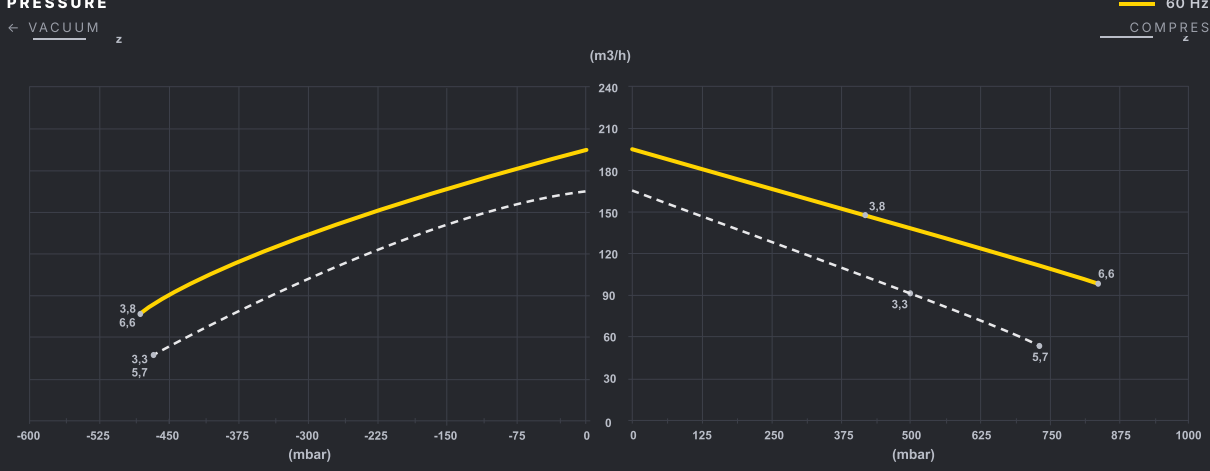

POWER VS PRESSURE

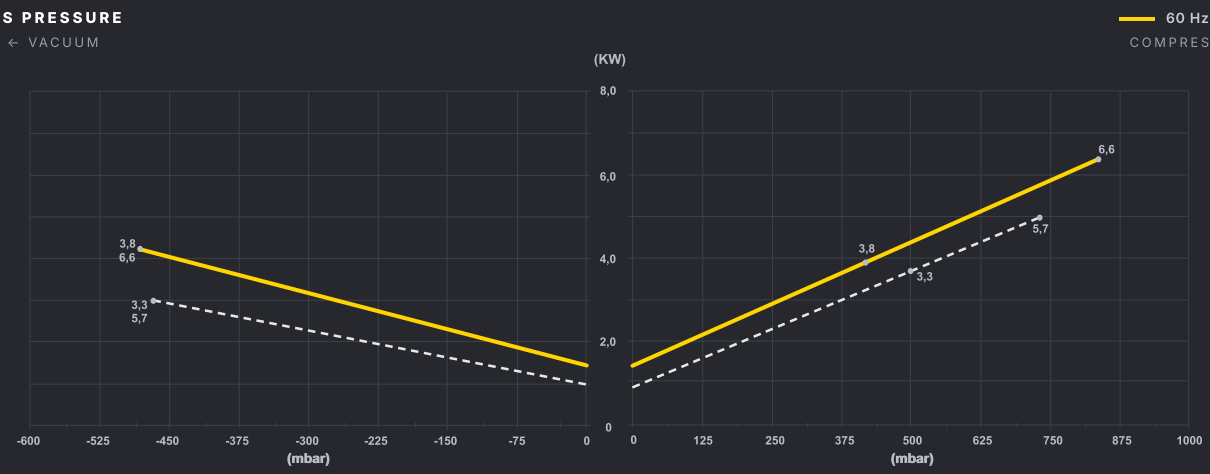

TEMPERATURE RISE VS PRESSURE

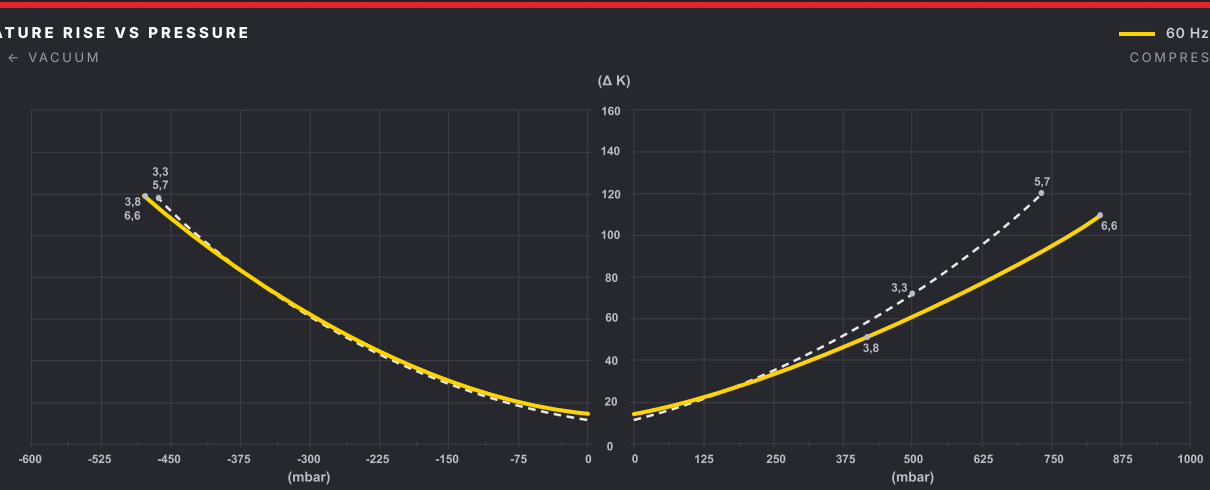



Every unit can be used as a vacuum pump or as a compressor, in continuous duty.

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

DIMENSIONS

All dimensions in mm

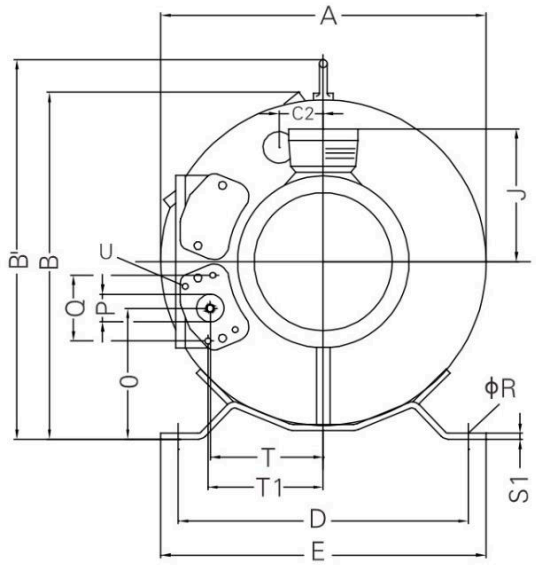

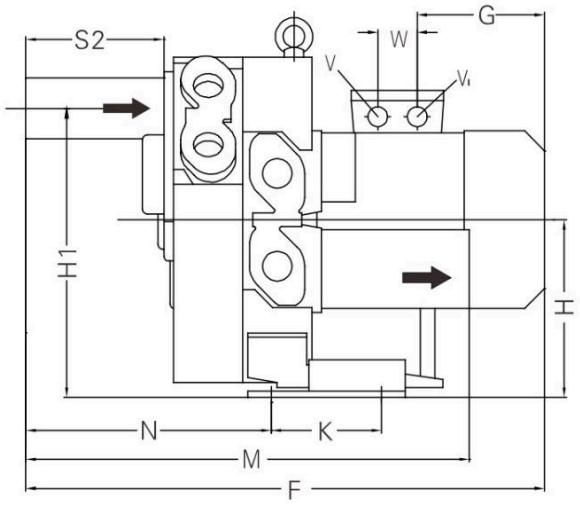

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0165-2ST331-6	442	457	495	63	372	406	578	211	236	389	128	152	458	259	173	G1 ¼"
STRP0165-2ST571-7	442	457	495	63	372	406	643	248	236	389	148	152	458	259	173	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0165-2ST331-6	64	14	5	140	31	153	155	M6 X 17	M25 X 1.5	M16 X 1.5	42
STRP0165-2ST571-7	64	14	5	140	31	153	155	M6 X 17	M25 X 1.5	M16 X 1.5	42

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com

Technical changes reserved