REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

84 m³/h	2.2 psi	−2.0 psi	0.23–0.28 kW	50 dB(A)	6–8 kg
49 CFM	0.15 bar	−0.14 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

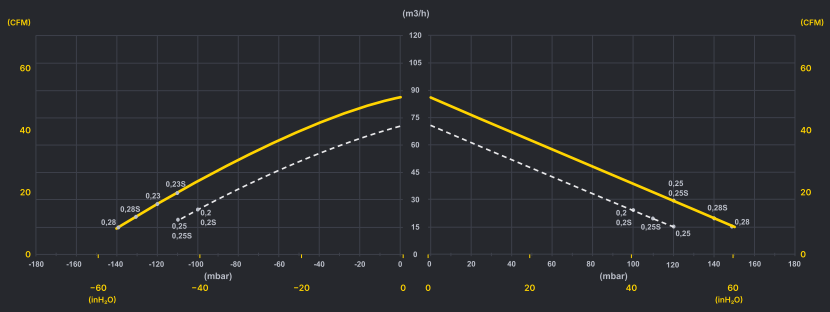


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

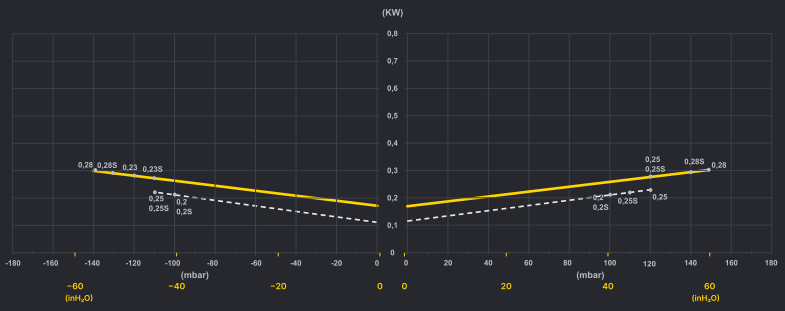


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

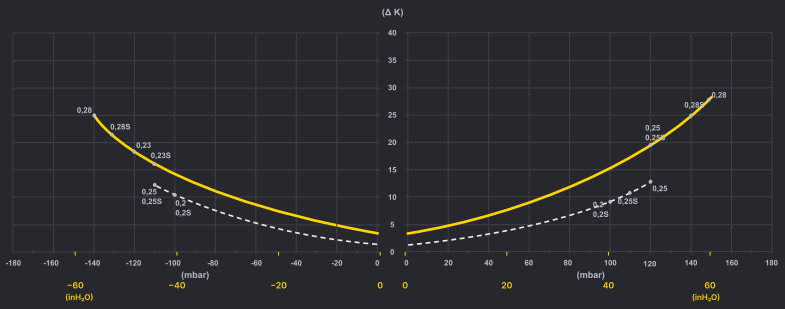

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0070-1MA200-1	0.23	230	1.6	84 m³/h 49 CFM	−1.6 psi −0.11 bar	1.7 psi 0.12 bar	50	7
STRC0070-1MT200-6	0.23	220-275 Δ / 380-480 Y	1.75 Δ / 1.0 Y	84 m³/h 49 CFM	−1.7 psi −0.12 bar	1.7 psi 0.12 bar	50	6
STRC0070-1MA250-1	0.28	230	1	84 m³/h 49 CFM	−1.9 psi −0.13 bar	2.0 psi 0.14 bar	50	8
STRC0070-1MT250-6	0.28	220-275 Δ / 380-480 Y	2.0 Δ / 1.15 Y	84 m³/h 49 CFM	−2.0 psi −0.14 bar	2.2 psi 0.15 bar	50	7


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

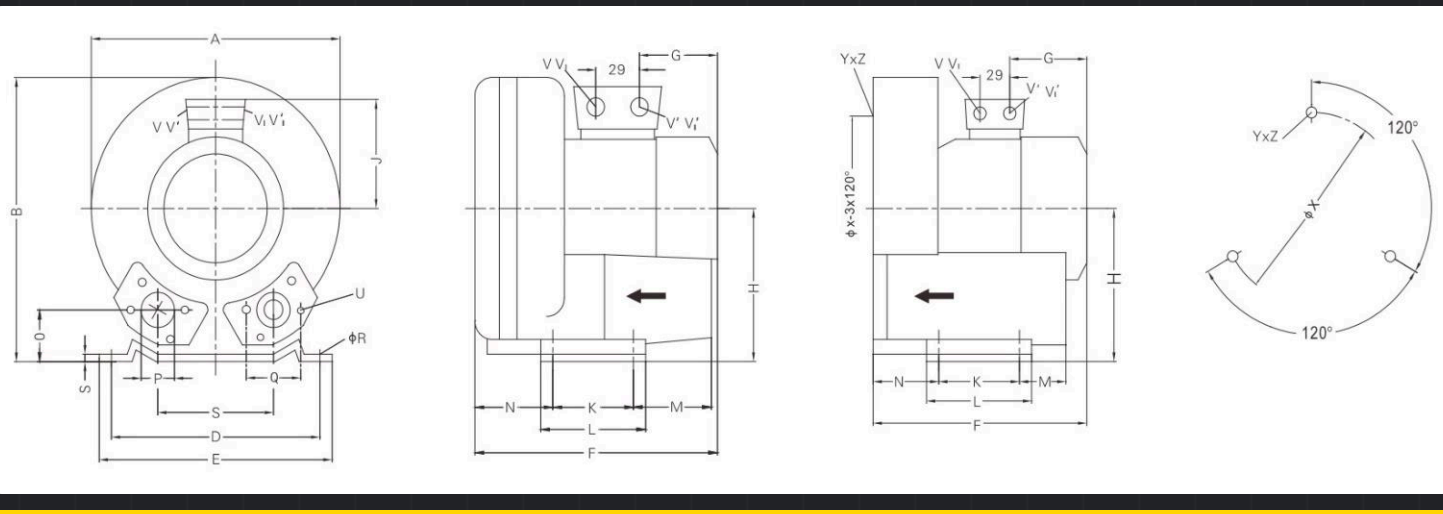

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O
STRC0070-1MA200-1	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MT200-6	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MA250-1	213	225	76	155	172	242	124	114	101	80	101	111	52	33
STRC0070-1MT250-6	213	225	76	155	172	242	124	114	101	80	101	111	52	33

Type	P	Q	ϕR	S	U	V	Y_Z	X-Holes	ϕX
STRC0070-1MA200-1	G 1"	46	8.5	2	M6 × 18	M16 × 1.5	M6 × 20	0/120°/240°	126
STRC0070-1MT200-6	G 1"	46	8.5	2	M6 × 18	M16 × 1.5	M6 × 20	0/120°/240°	126
STRC0070-1MA250-1	G 1"	46	8.5	2	M6 × 18	M16 × 1.5	M6 × 20	0/120°/240°	126
STRC0070-1MT250-6	G 1"	46	8.5	2	M6 × 18	M16 × 1.5	M6 × 20	0/120°/240°	126

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com