REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

180 m³/h	6.1 psi	−5.1 psi	1.75–20.5 kW	69 dB(A)	25–27 kg
106 CFM	0.42 bar	−0.35 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

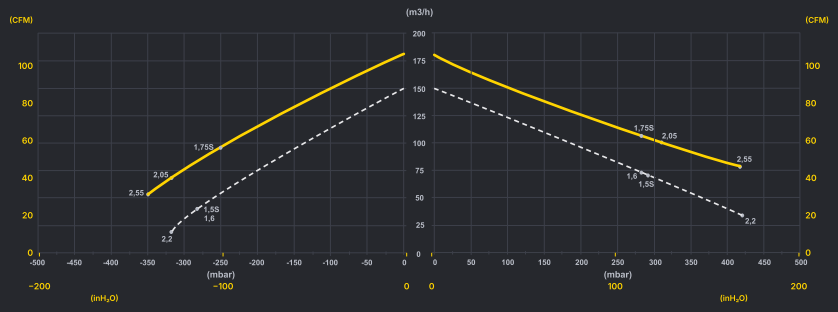


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

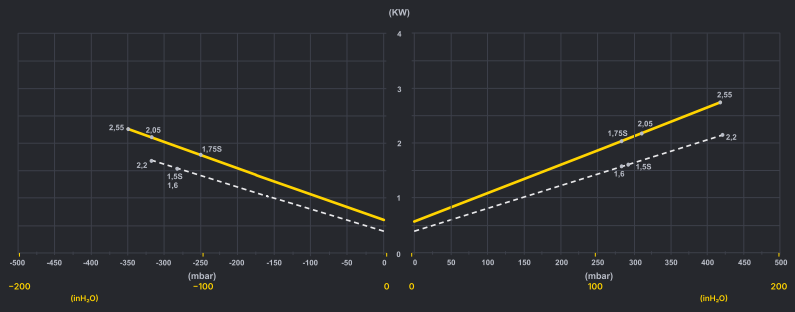


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

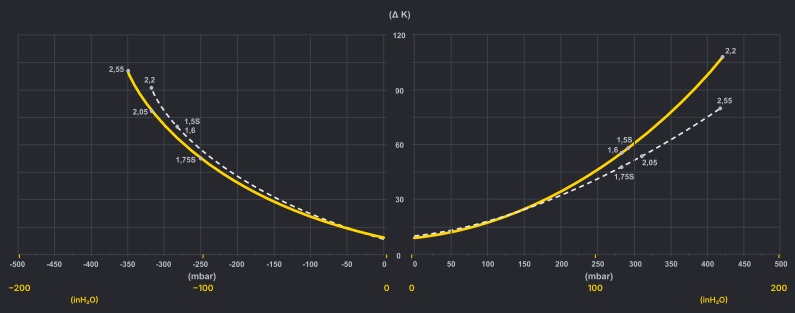

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0140-2SA151-1	1.75	230	10	180 m³/h 106 CFM	−3.6 psi −0.25 bar	4.1 psi 0.28 bar	69	26
STRC0140-2ST161-6	20.5	220-275 Δ / 380-480 Y	7.6 Δ / 4.4 Y	180 m³/h 106 CFM	−4.6 psi −0.32 bar	4.5 psi 0.31 bar	69	25
STRC0140-2ST221-6	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	180 m³/h 106 CFM	−5.1 psi −0.35 bar	6.1 psi 0.42 bar	69	27


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES


CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

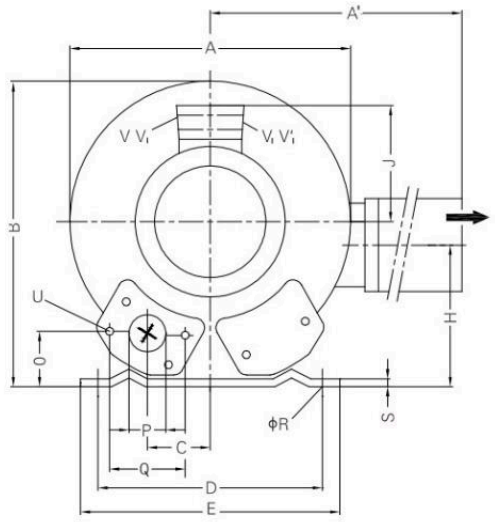

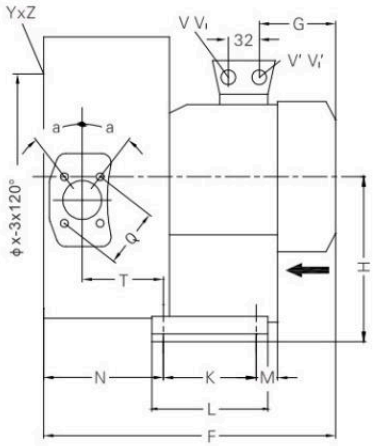



Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0140-2SA151-1	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M25 × 1.5	M16 × 1.5	174	M6 × 19	51°/171°/291°
STRC0140-2ST161-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M25 × 1.5	M16 × 1.5	174	M6 × 15	51°/171°/291°
STRC0140-2ST221-6	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G 1 1/2"	72	12	3	104	M6 × 19	M16 × 1.5	M25 × 1.5	174	M6 × 15	51°/171°/291°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com