REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

210 m³/h	2.3 psi	−2.9 psi	0.83–1.5 kW	66 dB(A)	15–18 kg
124 CFM	0.16 bar	−0.20 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

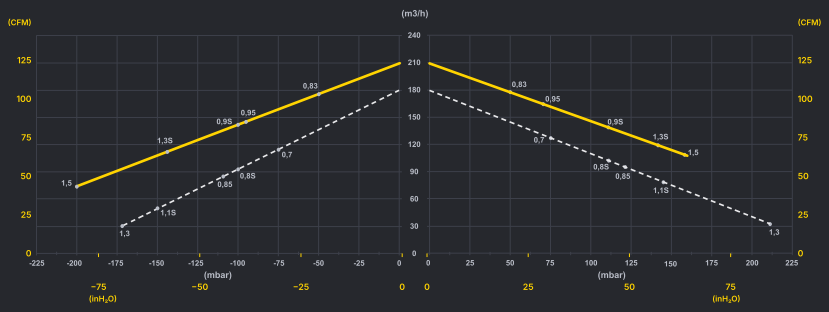


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

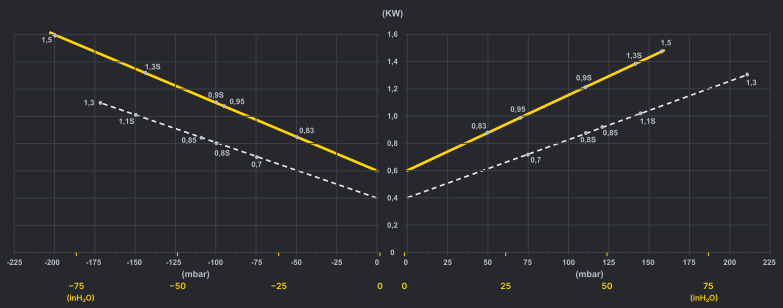


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

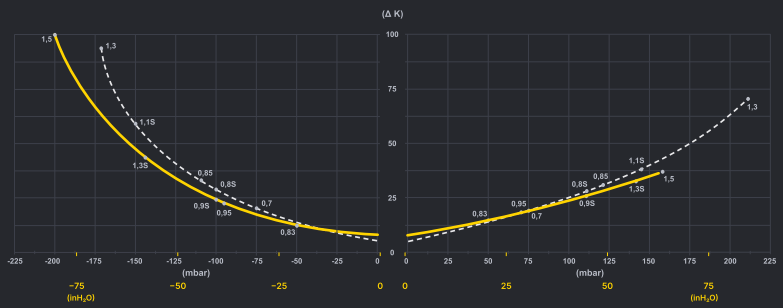

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0180-1MT700-6	0.83	220-275 Δ / 380-480 Y	3.75 Δ / 2.15 Y	210 m³/h 124 CFM	−0.73 psi −0.05 bar	0.73 psi 0.05 bar	66	15
STRC0180-1MA800-1	0.9	230	5.8	210 m³/h 124 CFM	−1.5 psi −0.10 bar	1.6 psi 0.11 bar	66	16
STRC0180-1MT850-6	0.95	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	210 m³/h 124 CFM	−1.3 psi −0.09 bar	1.0 psi 0.07 bar	66	17
STRC0180-1MA111-1	1.3	230	8.3	210 m³/h 124 CFM	−2.0 psi −0.14 bar	1.9 psi 0.13 bar	66	17
STRC0180-1MT131-6	1.5	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	210 m³/h 124 CFM	−2.9 psi −0.20 bar	2.3 psi 0.16 bar	66	18


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

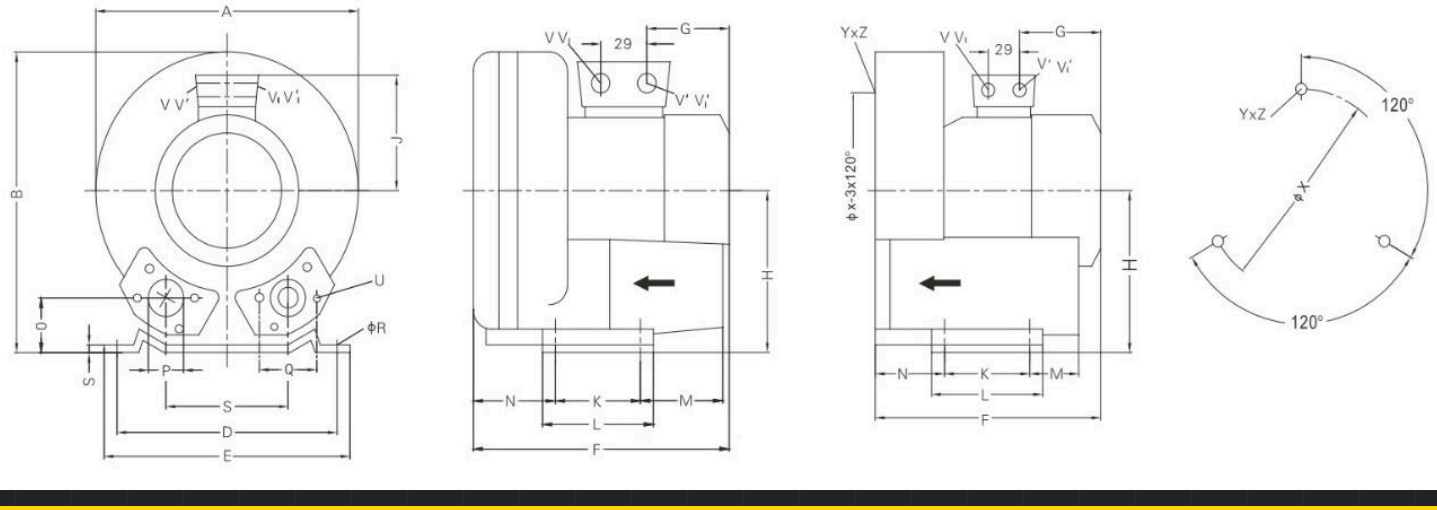

Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
STRC0180-1MT700-6	286	302	115	225	255	288	135	154	111	95	130	70	75	46	G 1 1/2"
STRC0180-1MA800-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT850-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MA111-1	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"
STRC0180-1MT131-6	286	302	115	225	255	311	160	154	120	95	130	70	75	46	G 1 1/2"

Type	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX
STRC0180-1MT700-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MA800-1	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MT850-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MA111-1	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174
STRC0180-1MT131-6	72	12	3	M6 × 19	M16 × 1.5	M25 × 1.5	M6 × 15	0/120°/240°	174

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com