REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

275 m³/h	7.0 psi	−5.9 psi	3.45–4.6 kW	74 dB(A)	40–44 kg
162 CFM	0.48 bar	−0.41 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

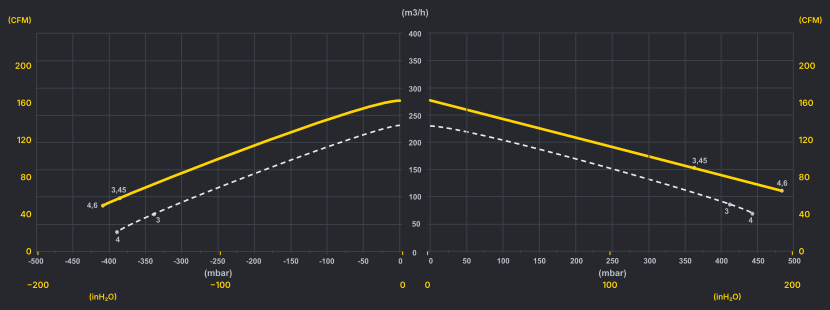

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

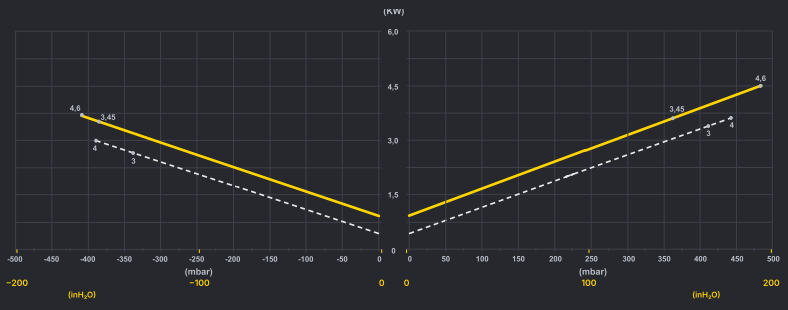

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

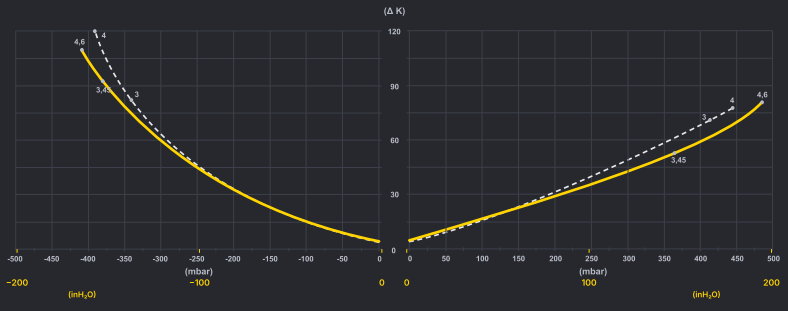

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0210-2ST301-6	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	275 m³/h 162 CFM	−5.5 psi −0.38 bar	5.2 psi 0.36 bar	74	40
STRC0210-2ST401-7	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	275 m³/h 162 CFM	−5.9 psi −0.41 bar	7.0 psi 0.48 bar	74	44


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

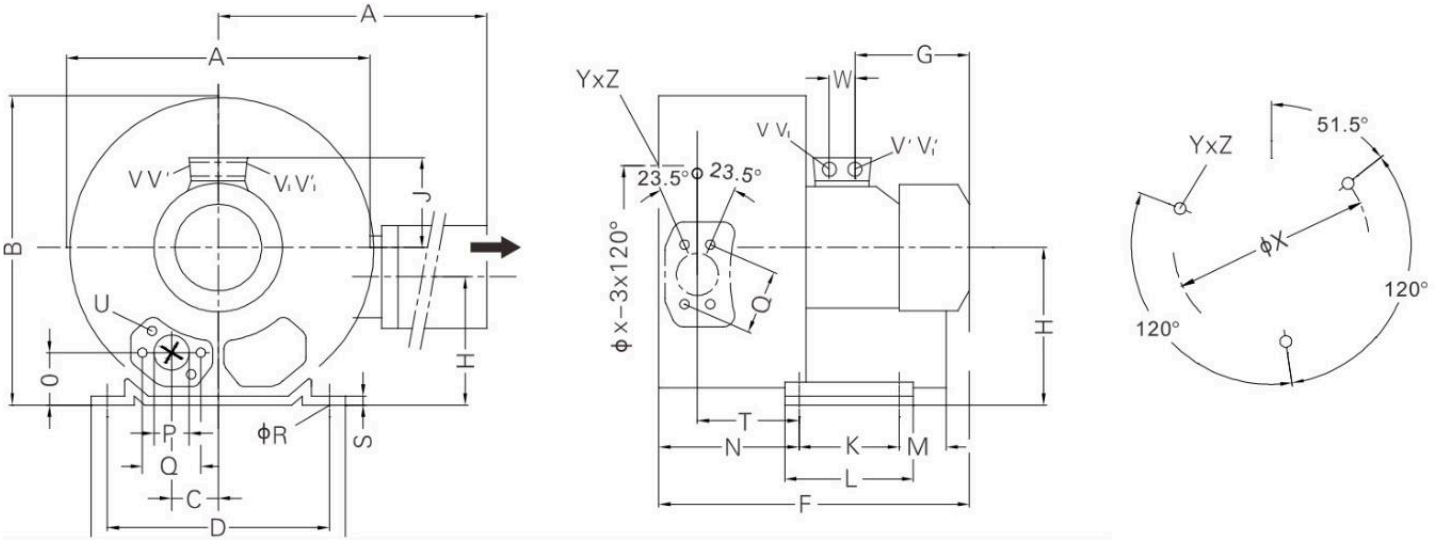

Type	A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ϕR	S	T	U	V	V'	ϕX	Y_Z	X-Holes
STRC0210-2ST301-6	372	411	371	60	260	295	465	190	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 × 17	M32 × 1.5	M32 × 1.5	200	M8 × 20	51.5°/171.5°/291.5°
STRC0210-2ST401-7	372	411	371	60	260	295	499	224	175	144	135	115	155	98	171	48	G 2"	83	14	4	116	M8 × 17	M32 × 1.5	M32 × 1.5	200	M8 × 20	51.5°/171.5°/291.5°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com