REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

375 m³/h	4.5 psi	−4.6 psi	2.05–4.6 kW	72 dB(A)	27–40 kg
221 CFM	0.31 bar	−0.32 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

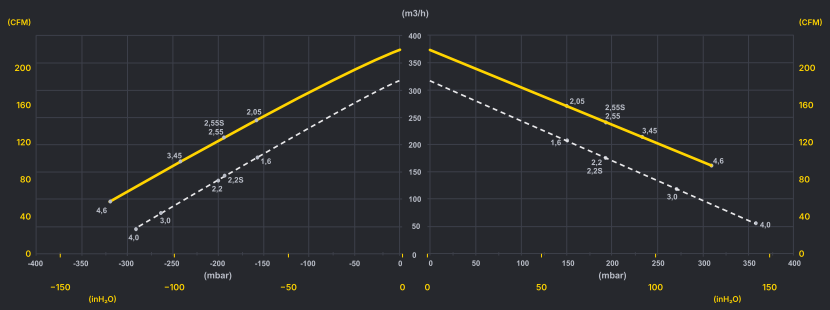

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

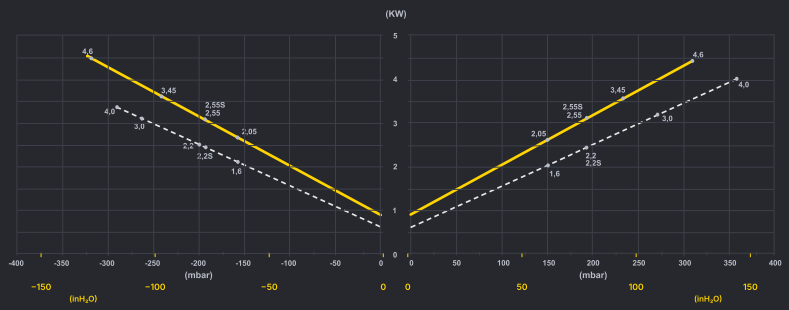

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

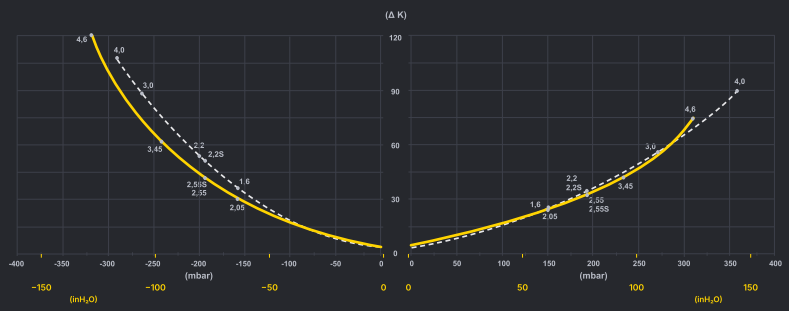

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0315-1MT161-6	2.05	220-275 Δ / 380-480 Y	8.8 Δ / 5.1 Y	375 m³/h 221 CFM	−2.3 psi −0.16 bar	2.2 psi 0.15 bar	72	27
STRC0315-1MA221-1	2.55	230	12.8	375 m³/h 221 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	72	30
STRC0315-1MT221-6	2.55	220-275 Δ / 380-480 Y	10.3 Δ / 6.0 Y	375 m³/h 221 CFM	−2.8 psi −0.19 bar	2.8 psi 0.19 bar	72	30
STRC0315-1MT301-6	3.45	220-275 Δ / 380-480 Y	12.6 Δ / 7.3 Y	375 m³/h 221 CFM	−3.5 psi −0.24 bar	3.3 psi 0.23 bar	72	36
STRC0315-1MT401-7	4.6	380-480 Δ / 660-720 Y	9.0 Δ / 5.2 Y	375 m³/h 221 CFM	−4.6 psi −0.32 bar	4.5 psi 0.31 bar	72	40


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES


CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

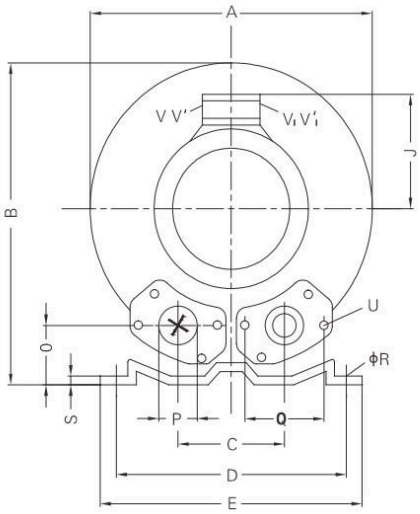

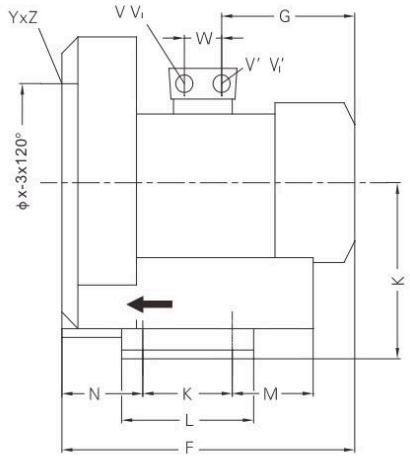



Type	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ϕR	S	U	V	V'	Y_Z	X-Holes	ϕX	W
STRC0315-1MT161-6	382	384	125	290	325	377	191	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MA221-1	382	384	125	290	325	404	218	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M16 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MT221-6	382	384	125	290	325	377	191	197	128	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M25 × 1.5	M6 × 1.5	M10 × 20	0/120°/240°	240	29
STRC0315-1MT301-6	382	384	125	290	325	409	188	197	135	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M32 × 1.5	M32 × 1.5	M10 × 20	0/120°/240°	240	42
STRC0315-1MT401-7	382	384	125	290	325	432	209	197	148	140	180	84	109	54	G 2"	83	15	4.5	M8 × 17	M32 × 1.5	M32 × 1.5	M10 × 20	0/120°/240°	240	42

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com