REGENERATIVE BLOWER · 2 STAGES IN SERIES

Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

620 m³/h	10.9 psi	−7.1 psi	6.3–17.3 kW	78 dB(A)	83–120 kg
365 CFM	0.75 bar	−0.49 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

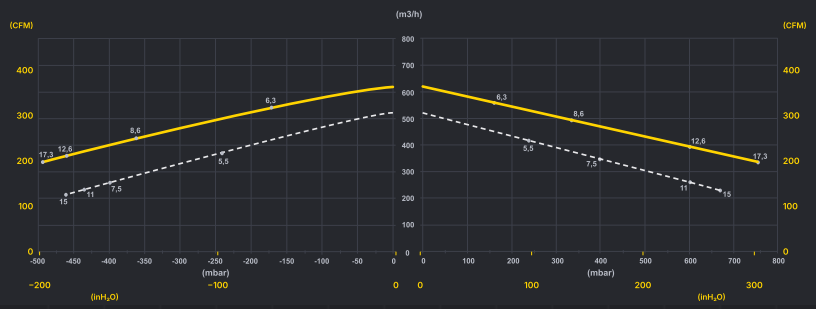

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

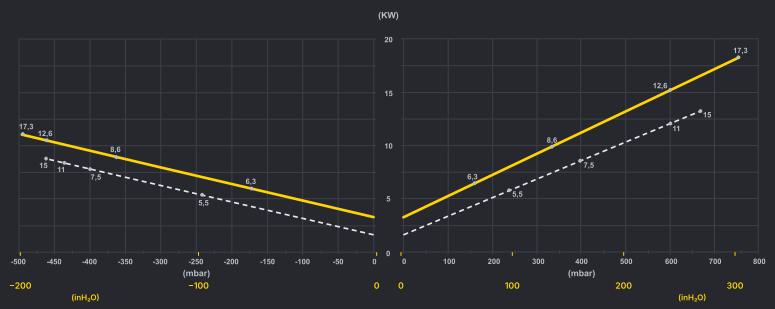

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

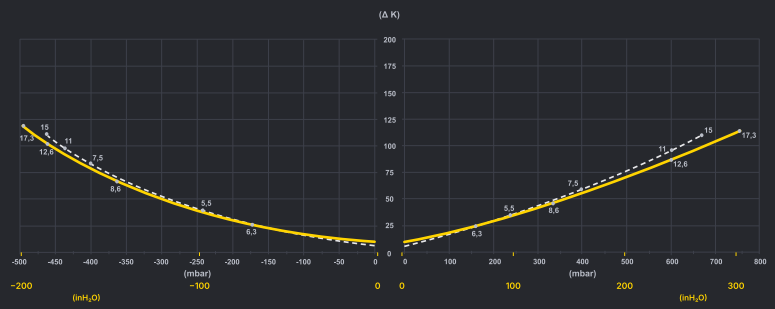

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0530-2ST551-7	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	620 m³/h 365 CFM	−2.5 psi −0.17 bar	2.3 psi 0.16 bar	78	83
STRC0530-2ST751-7	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	620 m³/h 365 CFM	−5.2 psi −0.36 bar	4.6 psi 0.32 bar	78	86
STRC0530-2ST112-7	12.6	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	620 m³/h 365 CFM	−6.7 psi −0.46 bar	8.7 psi 0.60 bar	78	104
STRC0530-2ST152-7	17.3	380-480 Δ / 660-720 Y	34.5 Δ / 19.9 Y	620 m³/h 365 CFM	−7.1 psi −0.49 bar	10.9 psi 0.75 bar	78	120

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230


DIMENSIONS

All dimensions in mm

HSC0530-2ST551-7 & HSC0530-2ST751-7

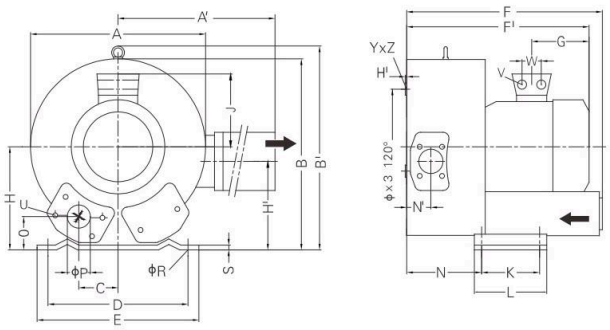

HSC0530-2ST112-7 & HSC0530-2ST152-7

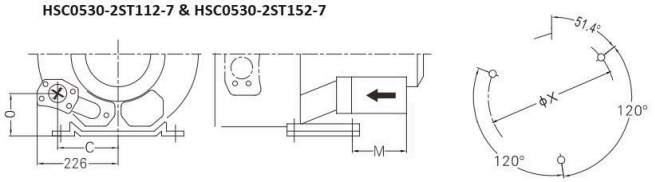

Type	A	A'	B	B'	C	D	E	F	F'	G	H	H'	J	K	L	M	N	N'	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0530-2ST551-7	500	549	490	509	-	356	545	545	589	247	240	199	148	170	217	140	236	84	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST751-7	500	549	490	509	-	356	545	545	589	247	240	199	167	170	217	140	236	84	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST112-7	500	549	490	509	-	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6	4 x M32 × 1.5	54	286	M12 × 20	58.5°/171.5°/291.5°
STRC0530-2ST152-7	500	549	490	509	152	356	545	717	694	318	240	199	197	170	217	312	212	84	105	G 2 1/2"	15	6	4 x M32 × 1.5	54	286	M12 × 20	58.5°/171.5°/291.5°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com