REGENERATIVE BLOWER · SINGLE STAGE

Single-stage regenerative blower.

Oil-free side channel blower for vacuum or pressure, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty

840 m³/h	3.8 psi	−3.9 psi	4.6–8.6 kW	74 dB(A)	57–69 kg
494 CFM	0.26 bar	−0.27 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

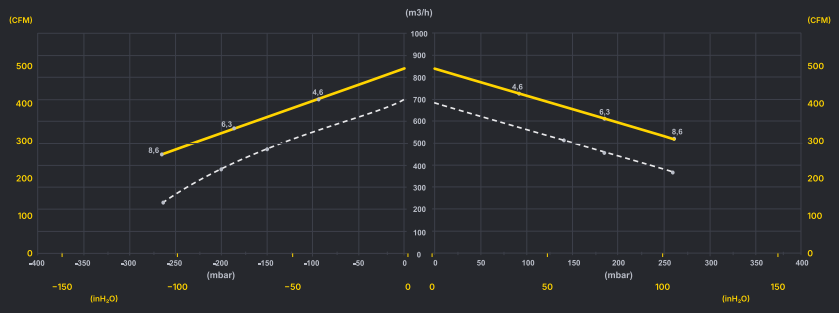

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

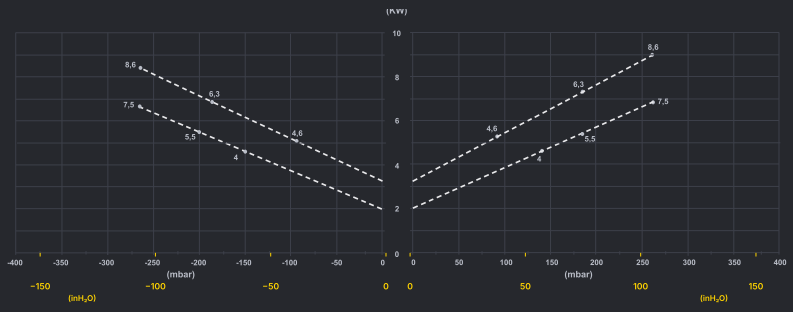

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

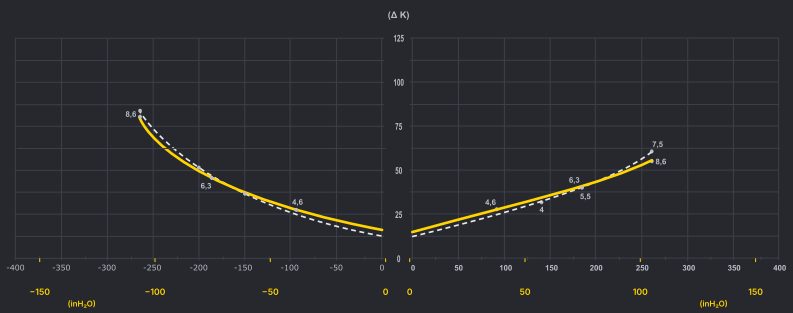

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0700-1MT401-7	4.6	380-480 Δ / 660-720 Y	9.5 Δ / 5.5 Y	840 m³/h 494 CFM	−1.3 psi −0.09 bar	1.3 psi 0.09 bar	74	57
STRC0700-1MT551-7	6.3	380-480 Δ / 660-720 Y	13.3 Δ / 7.7 Y	840 m³/h 494 CFM	−2.6 psi −0.18 bar	2.6 psi 0.18 bar	74	66
STRC0700-1MT751-7	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	840 m³/h 494 CFM	−3.9 psi −0.27 bar	3.8 psi 0.26 bar	74	69


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

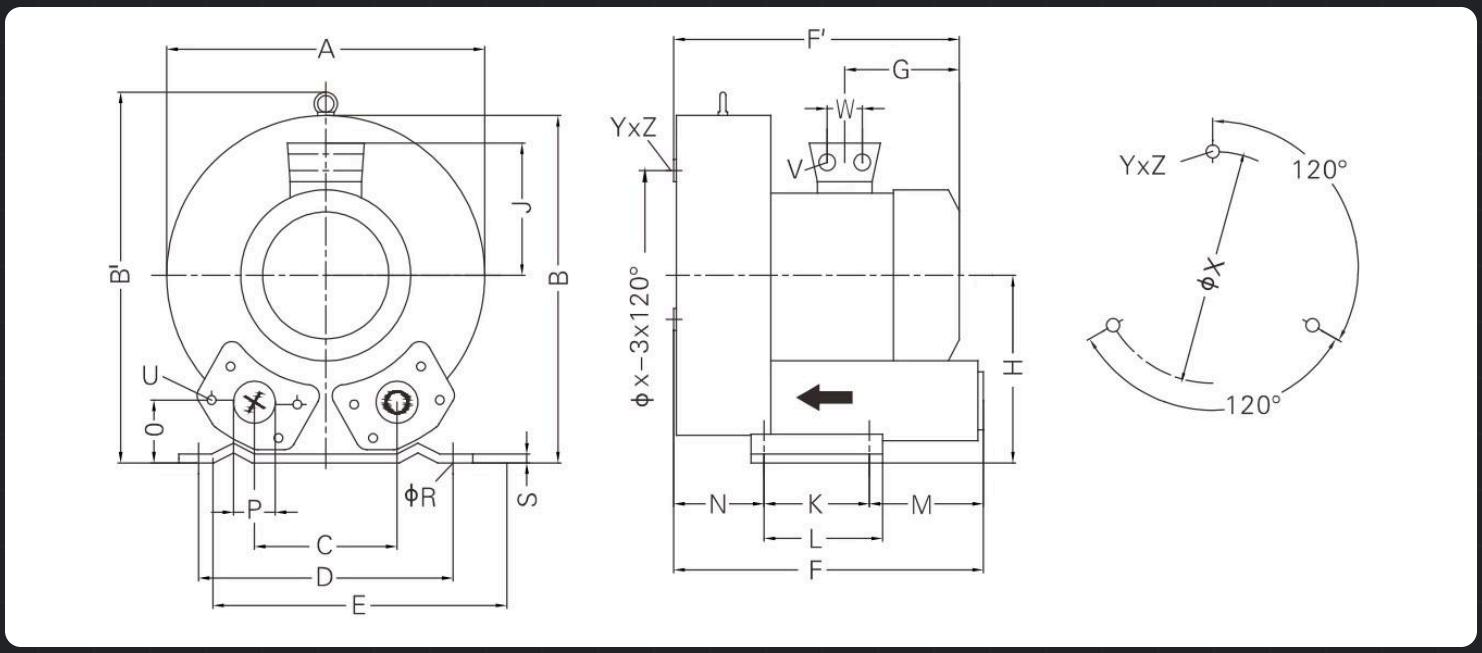

Type	A	B	B'	C	D	E	F	F'	G	H	J	K	L	M
STRC0700-1MT401-7	451	461	509	152	356	449	449	466	230	240	148	170	217	140
STRC0700-1MT551-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140
STRC0700-1MT751-7	451	461	509	152	356	449	449	492	247	240	148	170	217	140

Type	N	O	P	ϕR	S	V	W	ϕX	Y_Z	X-Holes
STRC0700-1MT401-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°
STRC0700-1MT551-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°
STRC0700-1MT751-7	124	65	G 2 1/2"	15	6	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com