REGENERATIVE BLOWER · 2 STAGES IN PARALLEL

Double-flow regenerative blower.

Two impellers in parallel for twice the flow. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



1 080 m³/h	5.1 psi	−4.5 psi	8.6–12.6 kW	78 dB(A)	91–110 kg
636 CFM	0.35 bar	−0.31 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, parallel	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

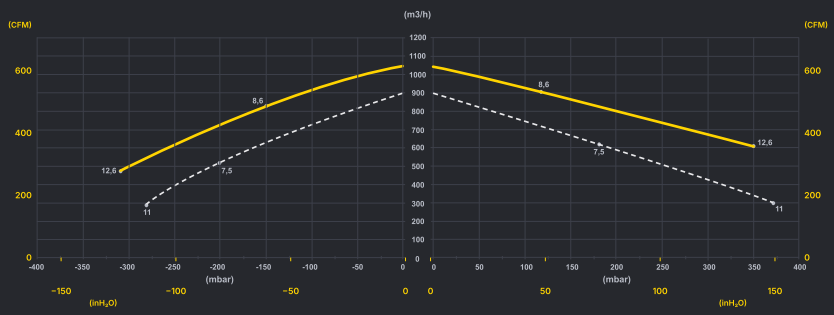


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

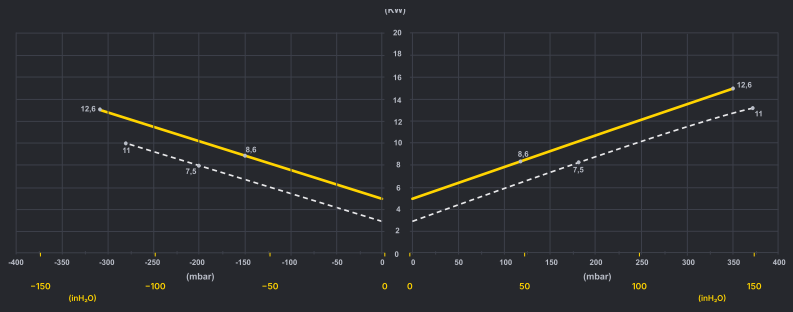


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

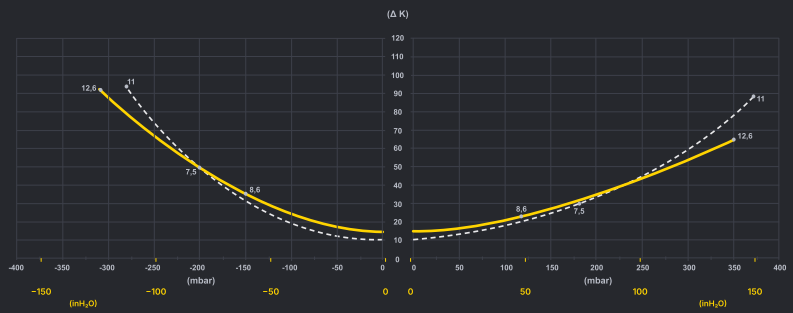

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRC0880-2PT751-7	8.6	380-480 Δ / 660-720 Y	17.3 Δ / 10.0 Y	1 080 m³/h 636 CFM	−2.2 psi −0.15 bar	1.7 psi 0.12 bar	78	91
STRC0880-2PT112-7	12.6	380-480 Δ / 660-720 Y	29.0 Δ / 16.7 Y	1 080 m³/h 636 CFM	−4.5 psi −0.31 bar	5.1 psi 0.35 bar	78	110

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.


MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRC ....-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRC ....-..T...-5	500 Δ	575 Δ
STRC ....-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRC ....-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRC ....-..A...-1	230	230
STRC ....-..S...-5	115/230	115/230


DIMENSIONS

All dimensions in mm

HSC0880-2PT751-7

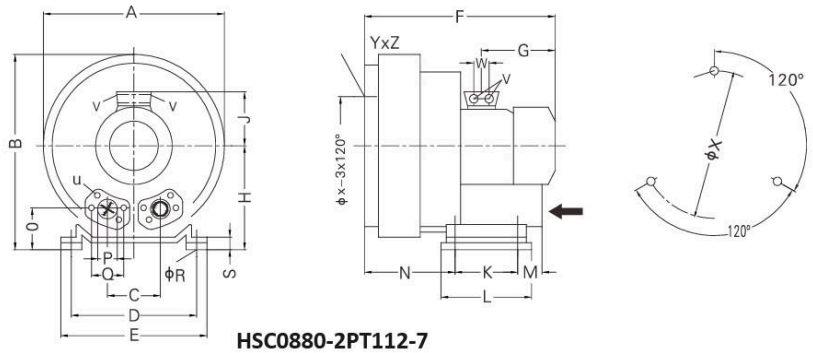

HSC0880-2PT112-7

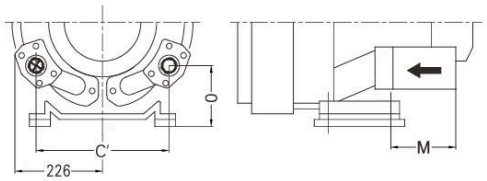

Type	A	B	C	C'	D	E	F	G	H	J	K	L	M	N	O	ϕP	ϕR	S	V	W	ϕX	YxZ	X-Holes
STRC0880-2PT751-7	500	550	152	-	356	394	589	247	300	167	170	217	-	236	125	G 2 1/2"	15	66	4 x M32 × 1.5	42	286	M12 × 20	0/120°/240°
STRC0880-2PT112-7	500	550	-	336	356	394	694	318	300	197	170	217	312	212	165	G 2 1/2"	15	66	4 x M32 × 1.5	54	286	M12 × 20	0/120°/240°

Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com