REGENERATIVE BLOWER · 2 STAGES IN PARALLEL

# Double-flow regenerative blower.

Two impellers in parallel for twice the flow. Oil-free, direct-driven.

Vacuum or pressure · Continuous duty



| 2 480 m³/h | 3.3 psi | −3.9 psi | 17.5–29 kW | 84 dB(A) | 220–235 kg |
|---|---|---|---|---|---|
| 1 460 CFM | 0.23 bar | −0.27 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 2 stages, parallel | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |


## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

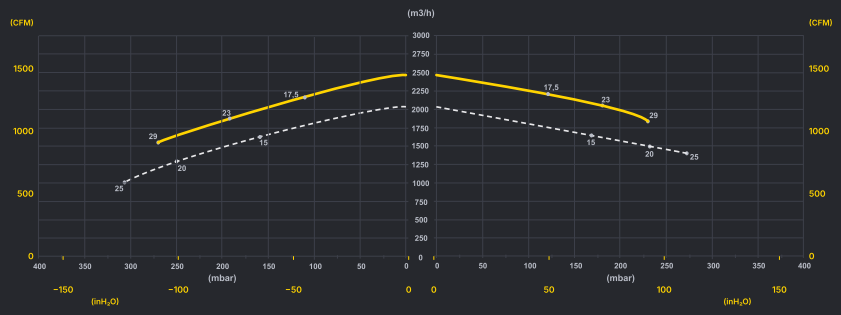



### POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

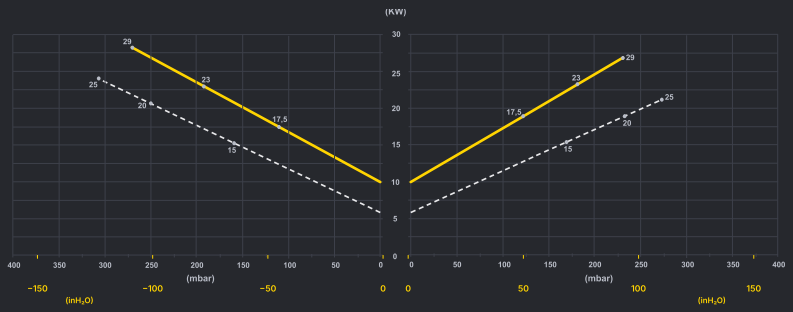



### TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

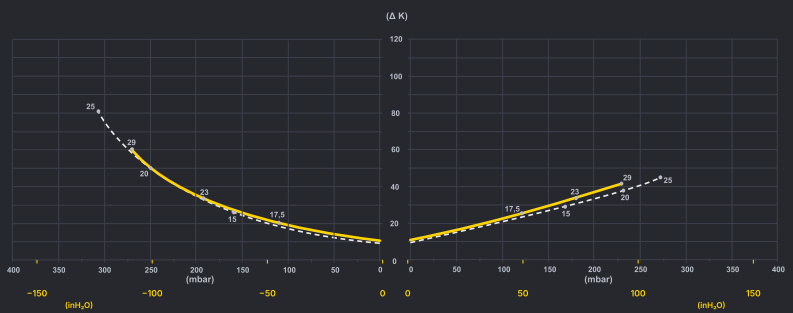


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC2050-2PT152-7** | 17.5 | 380-480 Δ / 660-720 Y | 36.5 Δ / 21.0 Y | 2 480 m³/h<br>1 460 CFM | −1.6 psi<br>−0.11 bar | 1.7 psi<br>0.12 bar | 84 | 220 |
| **STRC2050-2PT202-7** | 23 | 380-480 Δ / 660-720 Y | 42.0 Δ / 24.2 Y | 2 480 m³/h<br>1 460 CFM | −2.8 psi<br>−0.19 bar | 2.6 psi<br>0.18 bar | 84 | 230 |
| **STRC2050-2PT252-7** | 29 | 380-480 Δ / 660-720 Y | 52.0 Δ / 30.0 Y | 2 480 m³/h<br>1 460 CFM | −3.9 psi<br>−0.27 bar | 3.3 psi<br>0.23 bar | 84 | 235 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

| CODE | 50 HZ (V) | 60 HZ (V) |
|---|---|---|
| **STRC ....-..T...-1** | 185-225 Δ / 320-390 Y | 200-240 Δ / 345-415 Y |
| **STRC ....-..T...-5** | 500 Δ | 575 Δ |
| **STRC ....-..T...-6** | 200-240 Δ / 345-415 Y | 220-275 Δ / 380-480 Y |
| **STRC ....-..T...-7** | 345-415 Δ / 600-720 Y | 380-480 Δ / 660-720 Y |
| **STRC ....-..A...-1** | 230 | 230 |
| **STRC ....-..S...-5** | 115/230 | 115/230 |

## DIMENSIONS

All dimensions in mm

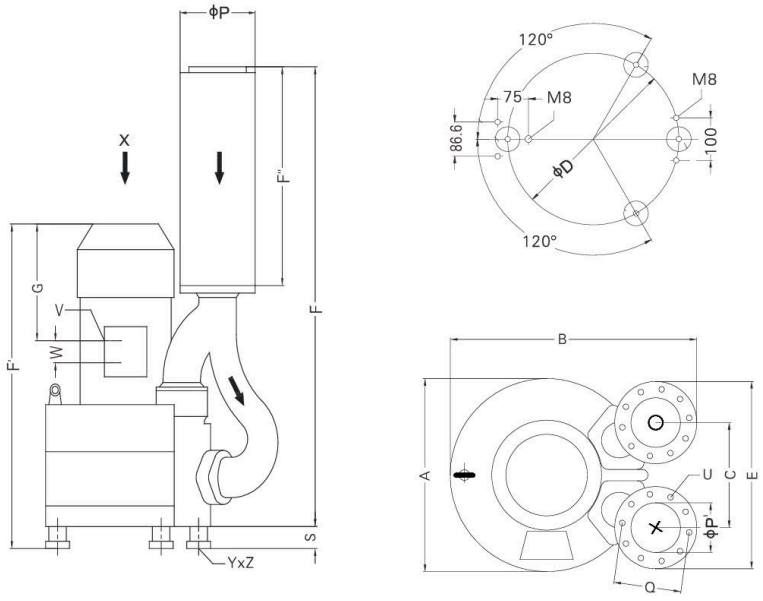


| Type | A | B | C | D | E | F | F' | F'' | G | P | P' | Q | S | U | V | W | Y_Z |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **STRC2050-2PT152-7** | 615 | 723 | 307 | 490 | 526 | 1201 | 848 | 578 | 291 | 219 | 135 | 201 | 58 | M8 × 40 | 4 x M40 × 1.5 | 54 | M12 × 10.5 |
| **STRC2050-2PT202-7** | 615 | 723 | 307 | 490 | 526 | 1201 | 848 | 578 | 291 | 219 | 135 | 201 | 58 | M8 × 40 | 4 x M40 × 1.5 | 54 | M12 × 10.5 |
| **STRC2050-2PT252-7** | 615 | 723 | 307 | 490 | 526 | 1201 | 908 | 578 | 351 | 219 | 135 | 201 | 58 | M8 × 40 | 4 x M40 × 1.5 | 54 | M12 × 10.5 |

**Let's size your blower.**

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com