
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



80 m³/h	5.7 psi	−4.9 psi	0.63–1.1 kW	62 dB(A)	16–18 kg
47 CFM	0.39 bar	−0.34 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz

CONFIGURATION	USE	MOTOR	AMBIENT / INLET
Single stage	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C


PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

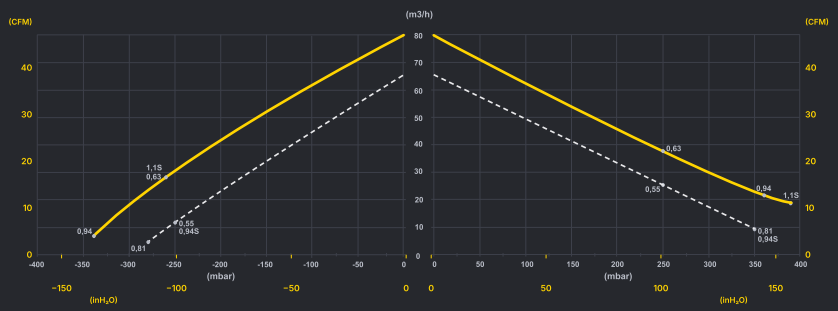


POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

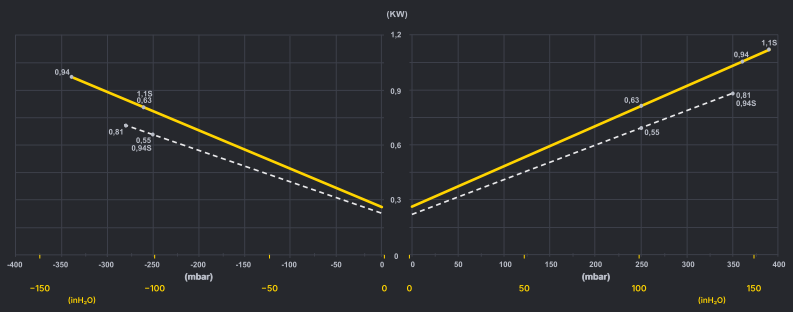


TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

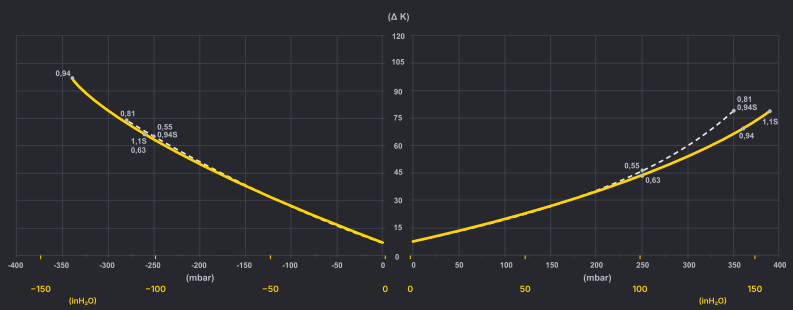

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0065-1MT550-6	0.63	220-275 Δ / 380-480 Y	Δ 3.7 / Y 2.1	80 m³/h 47 CFM	−3.8 psi −0.26 bar	3.6 psi 0.25 bar	62	16
STRP0065-1MT810-6	0.94	220-275 Δ / 380-480 Y	Δ 4.0 / Y 2.3	80 m³/h 47 CFM	−4.9 psi −0.34 bar	5.2 psi 0.36 bar	62	17
STRP0065-1MA940-1	1.1	230	9	80 m³/h 47 CFM	−4.1 psi −0.28 bar	5.7 psi 0.39 bar	62	18


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRP ….-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRP ….-..T...-5	500 Δ	575 Δ
STRP ….-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRP ….-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRP ….-..A...-1	230	230
STRP ….-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

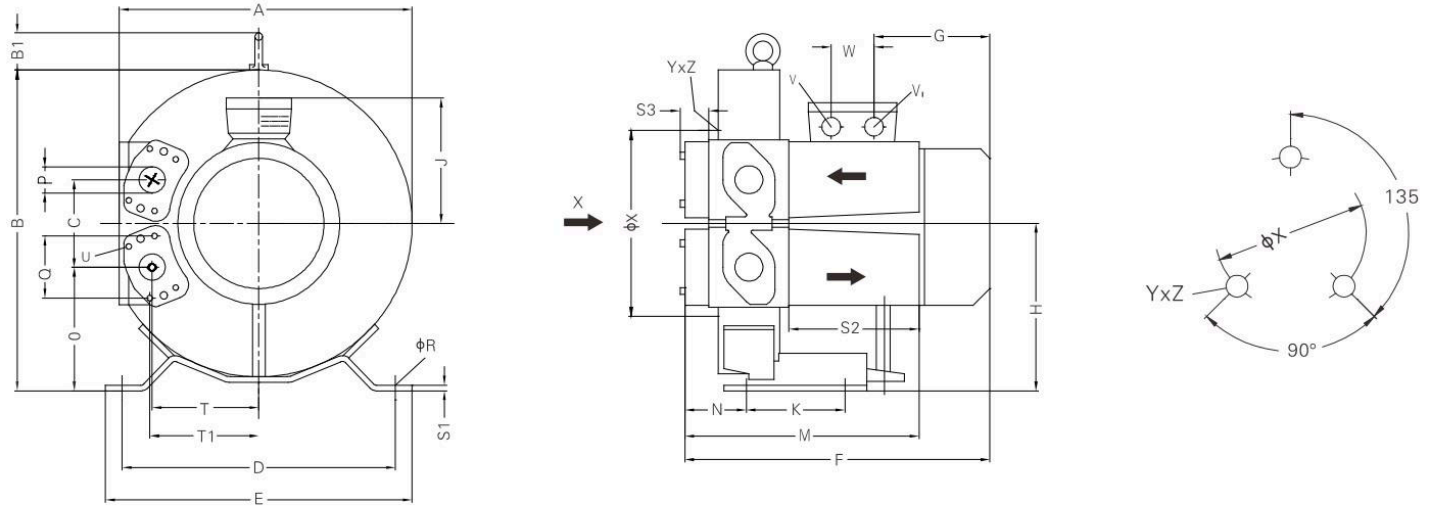

Type	A	B	B1	C	D	E	F	G	H	J	K	M	N	O	P
STRP0065-1MT550-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MT810-6	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"
STRP0065-1MA940-1	313	339	39	94	290	325	295	153	177	120	105	256	67	130	G1 ¼"

Type	Q	R	S1	S2	S3	T	T1	U	V	V1	W	X	YxZ
STRP0065-1MT550-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6 X 15
STRP0065-1MT810-6	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6 X 15
STRP0065-1MA940-1	64	14	4	140	31	114	116	M6 X 17	M25 X 1.5	M16 X 1.5	32	153	M6 X 15

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com