HIGH-PERFORMANCE BLOWER · 2 STAGES IN SERIES

High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.

Vacuum or pressure · Continuous duty



195 m³/h	12.2 psi	−7.0 psi	3.8–6.6 kW	72 dB(A)	48–65 kg
115 CFM	0.84 bar	−0.48 bar			
MAX. FLOW	MAX. PRESSURE	MAX. VACUUM	MOTOR POWER	NOISE	WEIGHT

Values at 60 Hz


CONFIGURATION	USE	MOTOR	AMBIENT / INLET
2 stages, series	Vacuum pump or compressor	50/60 Hz, class F, IP55	−25 to 40 °C

PERFORMANCE CURVES

FLOW VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

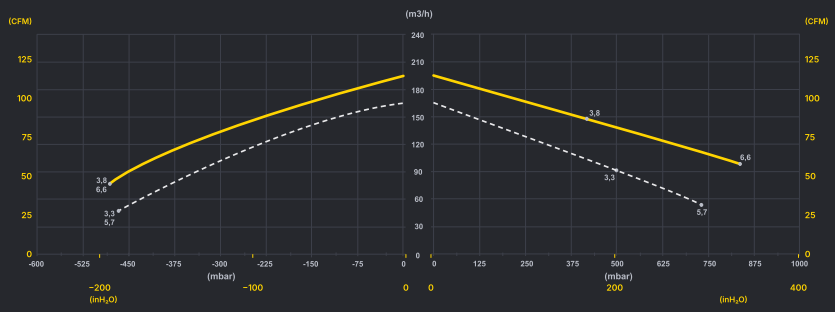

POWER VS PRESSURE

← VACUUM


60 Hz ---- 50 Hz
COMPRESSION →

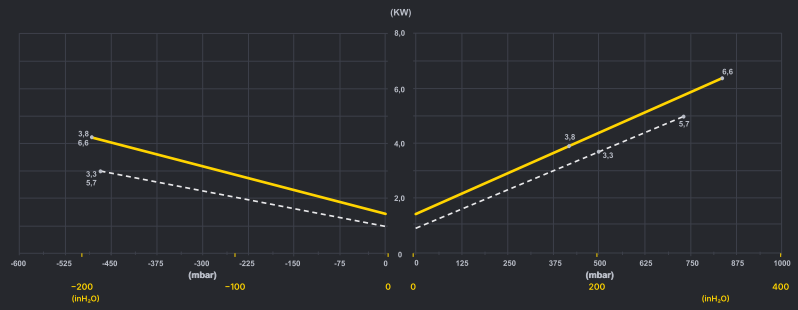

TEMPERATURE RISE VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz
COMPRESSION →

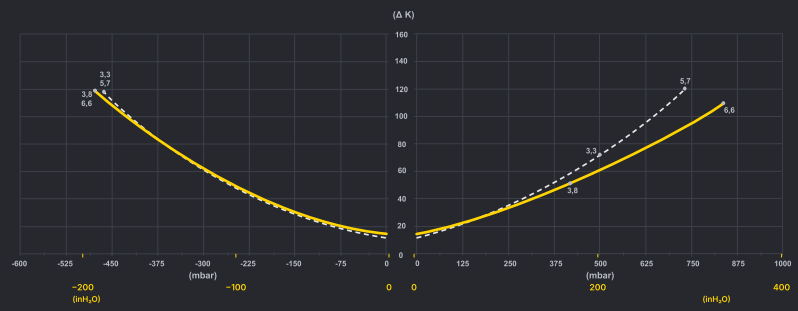

Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.

MODELS · 60 Hz

TYPE	KW	VOLTAGE (V)	CURRENT (A)	FLOW	MAX. VACUUM	MAX. PRESSURE	DB(A)	KG
STRP0165-2ST331-6	3.8	220-275 Δ / 380-480 Y	Δ 14.2 / Y 8.2	195 m³/h 115 CFM	−7.0 psi −0.48 bar	6.1 psi 0.42 bar	71	48
STRP0165-2ST571-7	6.6	380-480 Δ / 660-720 Y	Δ 12.0 / Y 6.0	195 m³/h 115 CFM	−7.0 psi −0.48 bar	12.2 psi 0.84 bar	72	65


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

MOTOR CODES · AVAILABLE VOLTAGES

CODE	50 HZ (V)	60 HZ (V)
STRP ….-..T...-1	185-225 Δ / 320-390 Y	200-240 Δ / 345-415 Y
STRP ….-..T...-5	500 Δ	575 Δ
STRP ….-..T...-6	200-240 Δ / 345-415 Y	220-275 Δ / 380-480 Y
STRP ….-..T...-7	345-415 Δ / 600-720 Y	380-480 Δ / 660-720 Y
STRP ….-..A...-1	230	230
STRP ….-..S...-5	115/230	115/230

DIMENSIONS

All dimensions in mm

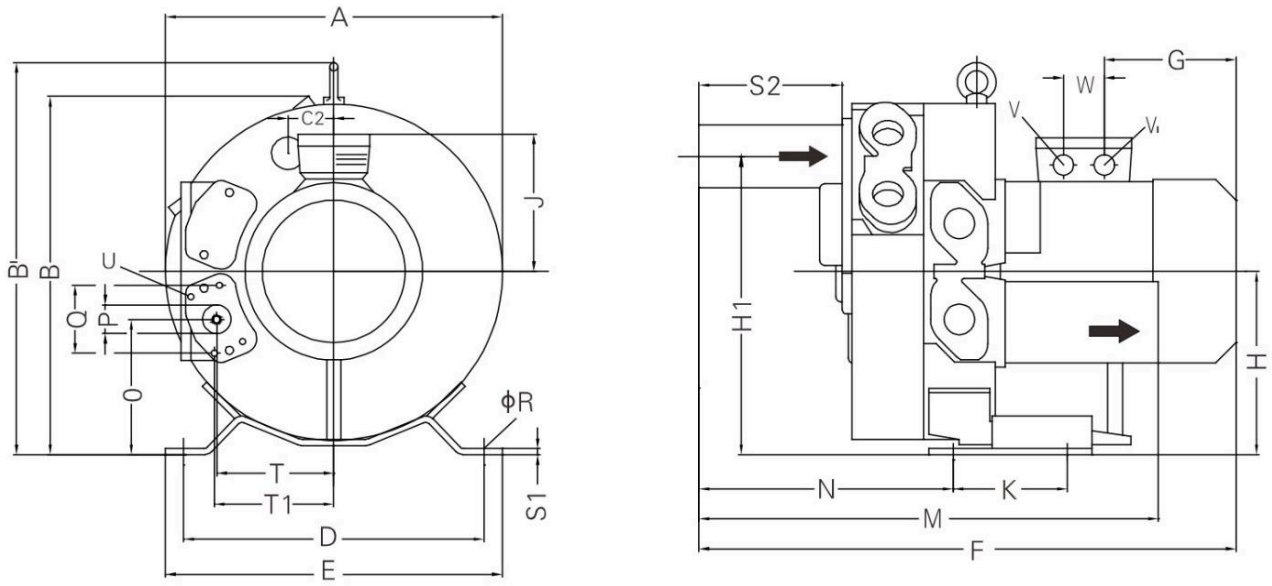

Type	A	B	B'	C2	D	E	F	G	H	H1	J	K	M	N	O	P
STRP0165-2ST331-6	442	457	495	63	372	406	578	211	236	389	128	152	458	259	173	G1 ¼"
STRP0165-2ST571-7	442	457	495	63	372	406	643	248	236	389	148	152	458	259	173	G1 ¼"

Type	Q	ØR	S1	S2	S3	T	T1	U	V	V1	W
STRP0165-2ST331-6	64	14	5	140	31	153	155	M6 X 17	M25 X 1.5	M16 X 1.5	42
STRP0165-2ST571-7	64	14	5	140	31	153	155	M6 X 17	M25 X 1.5	M16 X 1.5	42

Let's size your blower.
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com