REGENERATIVE BLOWER · 2 STAGES IN SERIES

# Two-stage regenerative blower.

Two impellers in series for higher pressure and deeper vacuum. Oil-free, direct-driven.



Vacuum or pressure · Continuous duty

| 375 m³/h | 9.4 psi | −6.4 psi | 2.55–8.6 kW | 76 dB(A) | 43–73 kg |
|---|---|---|---|---|---|
| 221 CFM | 0.65 bar | −0.44 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz

| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| 2 stages, series | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |


## PERFORMANCE CURVES

### FLOW VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

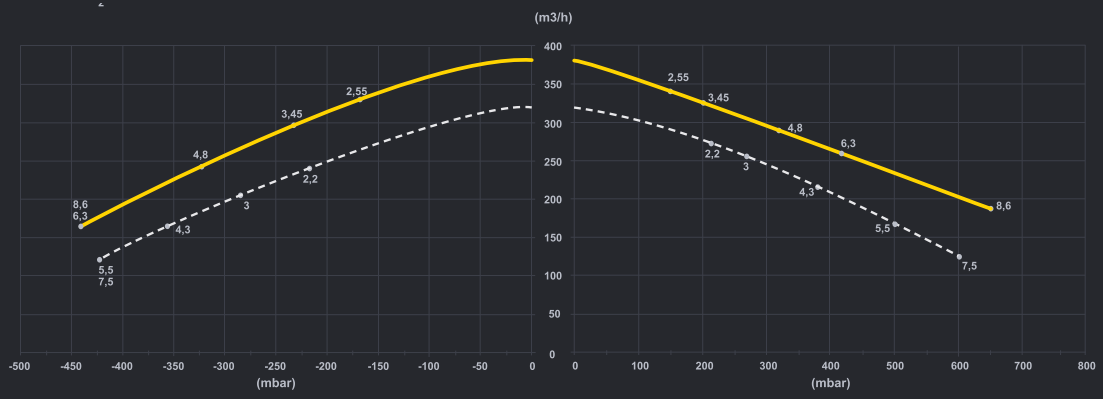



### POWER VS PRESSURE

← VACUUM

60 Hz ---- 50 Hz

COMPRESSION →

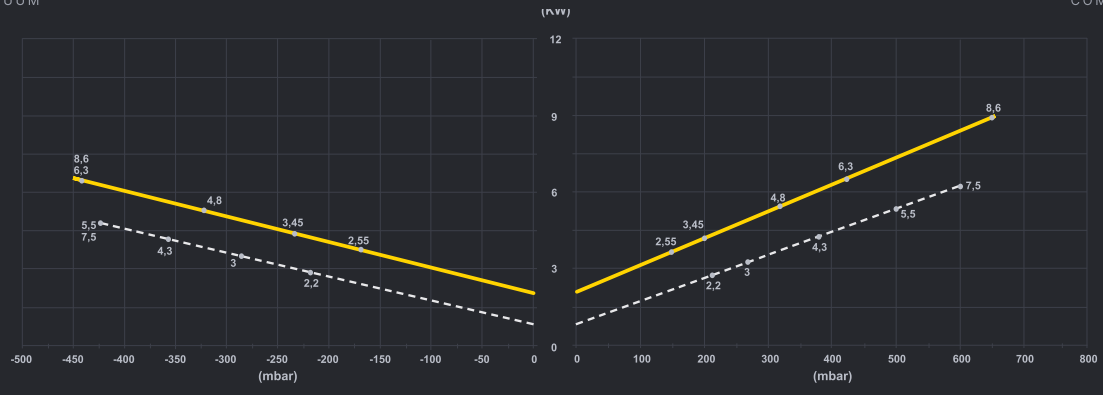


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


## MODELS · 60 Hz

| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRC0315-2ST221-6** | 2.55 | 220-275 Δ / 380-480 Y | 10.3 Δ / 6.0 Y | 375 m³/h<br>221 CFM | −2.5 psi<br>−0.17 bar | 2.2 psi<br>0.15 bar | 76 | 43 |
| **STRC0315-2ST301-6** | 3.45 | 220-275 Δ / 380-480 Y | 12.6 Δ / 7.3 Y | 375 m³/h<br>221 CFM | −3.3 psi<br>−0.23 bar | 2.9 psi<br>0.20 bar | 76 | 48 |
| **STRC0315-2ST431-7** | 4.8 | 380-480 Δ / 660-720 Y | 10.4 Δ / 6.0 Y | 375 m³/h<br>221 CFM | −4.6 psi<br>−0.32 bar | 4.8 psi<br>0.33 bar | 76 | 54 |
| **STRC0315-2ST551-7** | 6.3 | 380-480 Δ / 660-720 Y | 13.3 Δ / 7.7 Y | 375 m³/h<br>221 CFM | −6.4 psi<br>−0.44 bar | 5.9 psi<br>0.41 bar | 76 | 66 |
| **STRC0315-2ST751-7** | 8.6 | 380-480 Δ / 660-720 Y | 17.3 Δ / 10.0 Y | 375 m³/h<br>221 CFM | −6.4 psi<br>−0.44 bar | 9.4 psi<br>0.65 bar | 76 | 73 |

50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## DIMENSIONS

All dimensions in mm

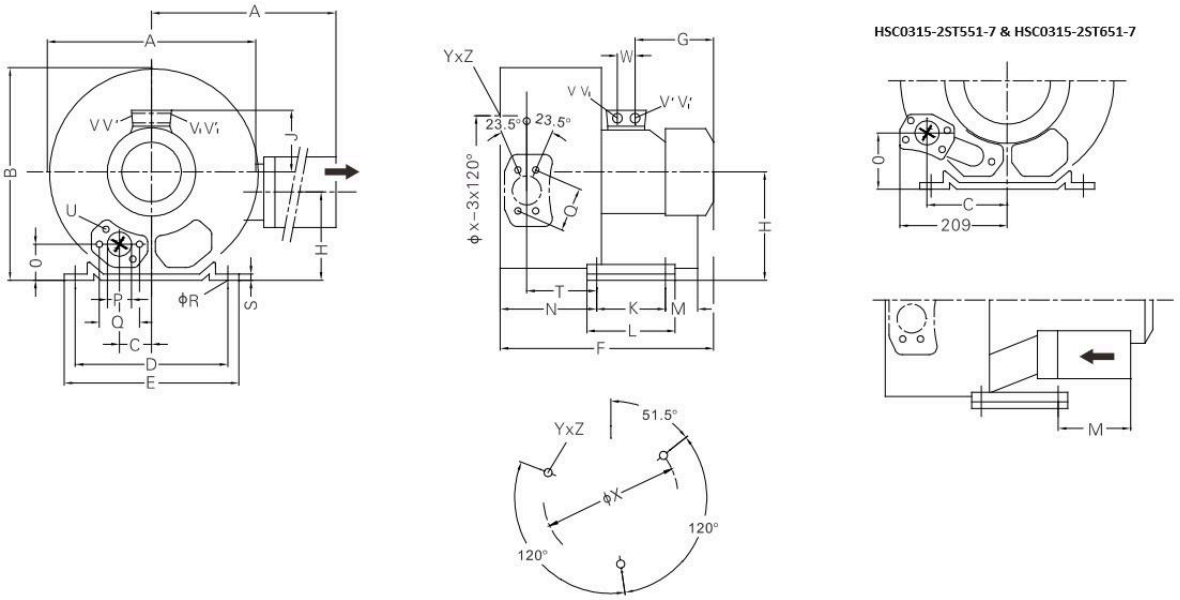


| Type | A | A' | B | C | D | E | F | G | H | H' | J | K | L | M | N | O | P | Q | ϕR | S | T | U | V | V' | ϕX | Y_Z | X-Holes | W |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **STRC0315-2ST221-6** | 426 | 426 | 420 | 63 | 290 | 325 | 473 | 185 | 197 | 162 | 128 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4.5 | 130 | M8 × 17 | M25 × 1.5 | M16 × 1.5 | 240 | M10 × 20 | 51.5°/171.5°/291.5° | 29 |
| **STRC0315-2ST301-6** | 426 | 426 | 420 | 63 | 290 | 325 | 507 | 180 | 197 | 162 | 135 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4.5 | 130 | M8 × 17 | M32 × 1.5 | M32 × 1.5 | 240 | M10 × 20 | 51.5°/171.5°/291.5° | 42 |
| **STRC0315-2ST431-7** | 426 | 426 | 420 | 63 | 290 | 325 | 526 | 209 | 197 | 162 | 148 | 140 | 180 | 84 | 205 | 53 | G 2" | 83 | 15 | 4.5 | 130 | M8 × 17 | M32 × 1.5 | M32 × 1.5 | 240 | M10 × 20 | 51.5°/171.5°/291.5° | 42 |
| **STRC0315-2ST551-7** | 426 | 426 | 420 | 154 | 290 | 325 | 571 | 226 | 197 | 162 | 167 | 140 | 180 | 225 | 205 | 94 | G 2" | 83 | 15 | 4.5 | 130 | M8 × 17 | M32 × 1.5 | M32 × 1.5 | 240 | M10 × 20 | 51.5°/171.5°/291.5° | 42 |
| **STRC0315-2ST751-7** | 426 | 426 | 420 | 154 | 290 | 325 | 571 | 226 | 197 | 162 | 167 | 140 | 180 | 225 | 205 | 94 | G 2" | 83 | 15 | 4.5 | 130 | M8 × 17 | M32 × 1.5 | M32 × 1.5 | 240 | M10 × 20 | 51.5°/171.5°/291.5° | 42 |

## Let's size your blower.

Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com