
HIGH-PERFORMANCE BLOWER · SINGLE STAGE

# High-performance regenerative blower.

Higher pressure and vacuum in a compact package. Oil-free, direct-driven by a 50/60 Hz motor.



Vacuum or pressure · Continuous duty


| 195 m³/h | 7.7 psi | −5.5 psi | 2.55–3.8 kW | 71 dB(A) | 32–35 kg |
|---|---|---|---|---|---|
| 115 CFM | 0.53 bar | −0.38 bar | | | |
| MAX. FLOW | MAX. PRESSURE | MAX. VACUUM | MOTOR POWER | NOISE | WEIGHT |

Values at 60 Hz


| CONFIGURATION | USE | MOTOR | AMBIENT / INLET |
|---|---|---|---|
| Single stage | Vacuum pump or compressor | 50/60 Hz, class F, IP55 | −25 to 40 °C |

## PERFORMANCE CURVES

### FLOW VS PRESSURE

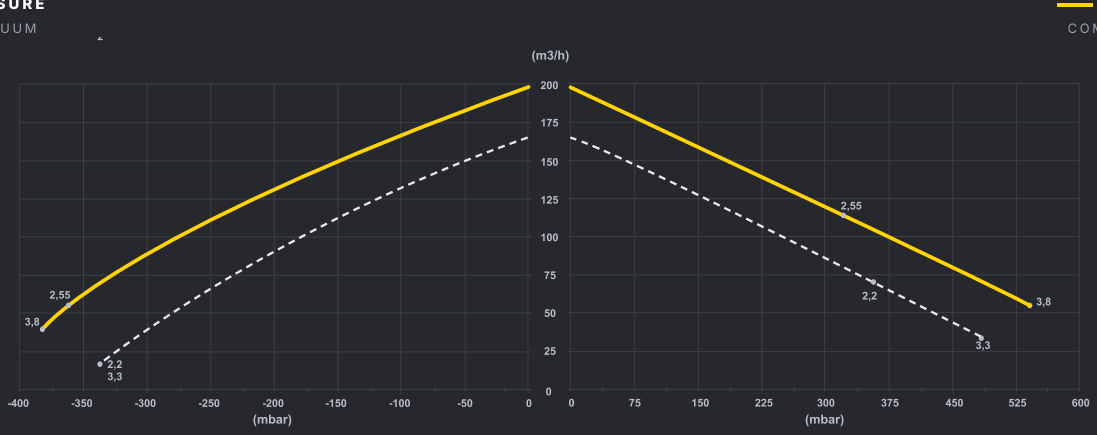


### POWER VS PRESSURE

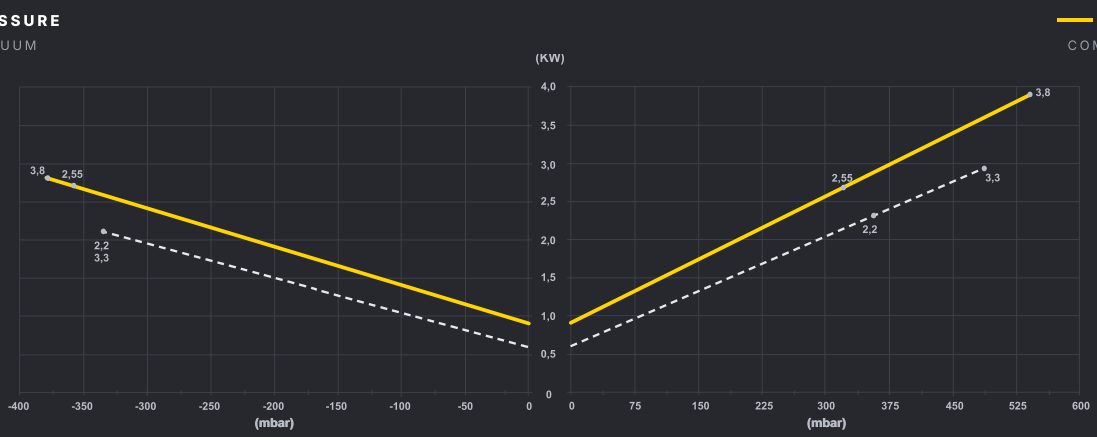


Curves are based on air at 15 °C, measured at the inlet port, 1013 mbar atmospheric pressure, tolerance ± 10 %. Pressure axes in mbar: 100 mbar = 1.45 psi = 0.1 bar. For other gases or conditions, please get in touch with us.


## MODELS · 60 Hz


| TYPE | KW | VOLTAGE (V) | CURRENT (A) | FLOW | MAX. VACUUM | MAX. PRESSURE | DB(A) | KG |
|---|---|---|---|---|---|---|---|---|
| **STRP0165-1MT221-6** | 2.55 | 220-275 Δ / 380-480 Y | Δ 11.2 / Y 6.5 | 195 m³/h<br>115 CFM | −5.2 psi<br>−0.36 bar | 4.6 psi<br>0.32 bar | 71 | 32 |
| **STRP0165-1MT331-6** | 3.8 | 220-275 Δ / 380-480 Y | Δ 14.2 / Y 8.2 | 195 m³/h<br>115 CFM | −5.5 psi<br>−0.38 bar | 7.7 psi<br>0.53 bar | 71 | 35 |


50 Hz data and other voltages on request. Relief valves are available to limit the differential pressure. Noise measured to EN ISO 3744 at 1 m with hoses connected.

## DIMENSIONS

All dimensions in mm

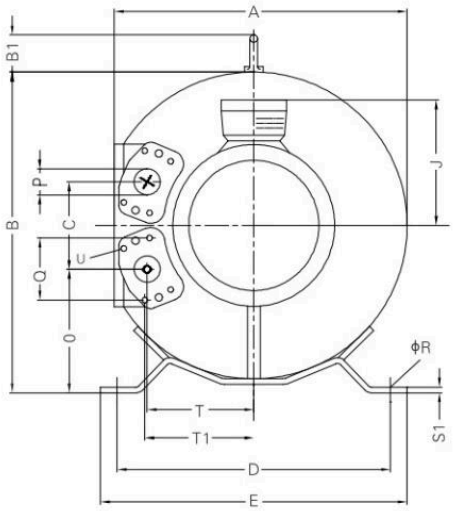

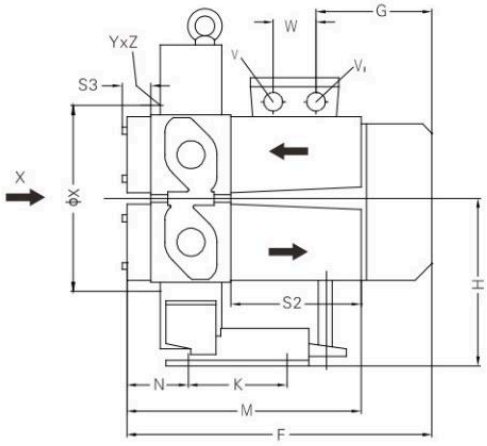
| Type | A | B | B1 | C | D | E | F | G | H | J | K | M | N | O | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0165-1MT221-6 | 418 | 455 | 39 | 127 | 371 | 406 | 364 | 185 | 235 | 128 | 152 | 271 | 72 | 172 | G1 ¼" |
| STRP0165-1MT331-6 | 418 | 455 | 39 | 127 | 371 | 406 | 390 | 211 | 235 | 128 | 152 | 271 | 72 | 172 | G1 ¼" |

| Type | Q | R | S1 | S2 | S3 | T | T1 | U | V | V1 | W | X | YxZ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| STRP0165-1MT221-6 | 64 | 14 | 5 | 140 | 31 | 153 | 155 | M6 X 17 | – | M16 X 1.5 | 32 | 228 | M8 X 15 |
| STRP0165-1MT331-6 | 64 | 14 | 5 | 140 | 31 | 153 | 155 | M6 X 17 | – | M16 X 1.5 | 32 | 228 | M8 X 15 |

**Let's size your blower.**
Send us your pressure, flow and gas type.

EMAIL abruens@id-industries.com
PHONE +1 438-880-4655
WEB id-industries.com