

## CHARGER M1 / SOLAR + CELL PADS / S1





## CONTROLLER + ISP / RAW NC

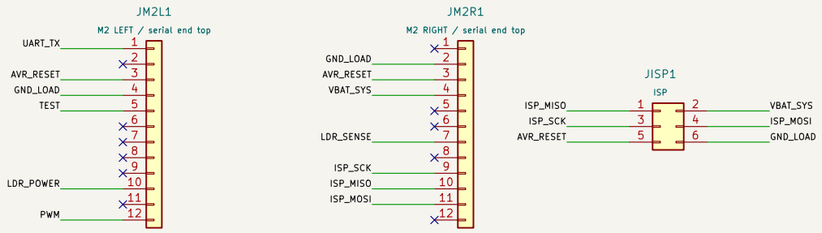



## OPTIONAL D1 MINI SOCKETS

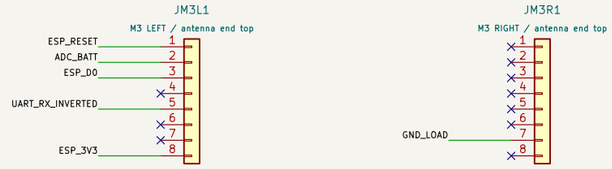








## UART INVERTER / BATTERY SENSE





## LIGHTS + REMOTE SENSOR / BUTTON




## EXTERNAL U3 / REMOVABLE LINKS




U0 solar buck, U3 buck-boost, cells and S1 are external. B− is its own net: never joined to GND_LOAD. No fuses. All returns = M1 OUT−.

Tier 0: omit telemetry. Tier 1: JP1 OPEN, USB. Tier 2: JP1 + JP2 closed, NO USB. JP3 closed only with powered M3.

R3 peak current requires bench qualification. 47R matches existing circuit; no LED−cable short protection.

**No fuses; U0, U3 external**

Sheet: /
File: SolarLights_Carrier_RevB.kicad_sch

***Title: Solar Lights Lite — carrier with charger***

| | | |
|---|---|---|
| Size: A3 | Date: 27−Oct−2026 | **Rev: B / REVIEW** |
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |