

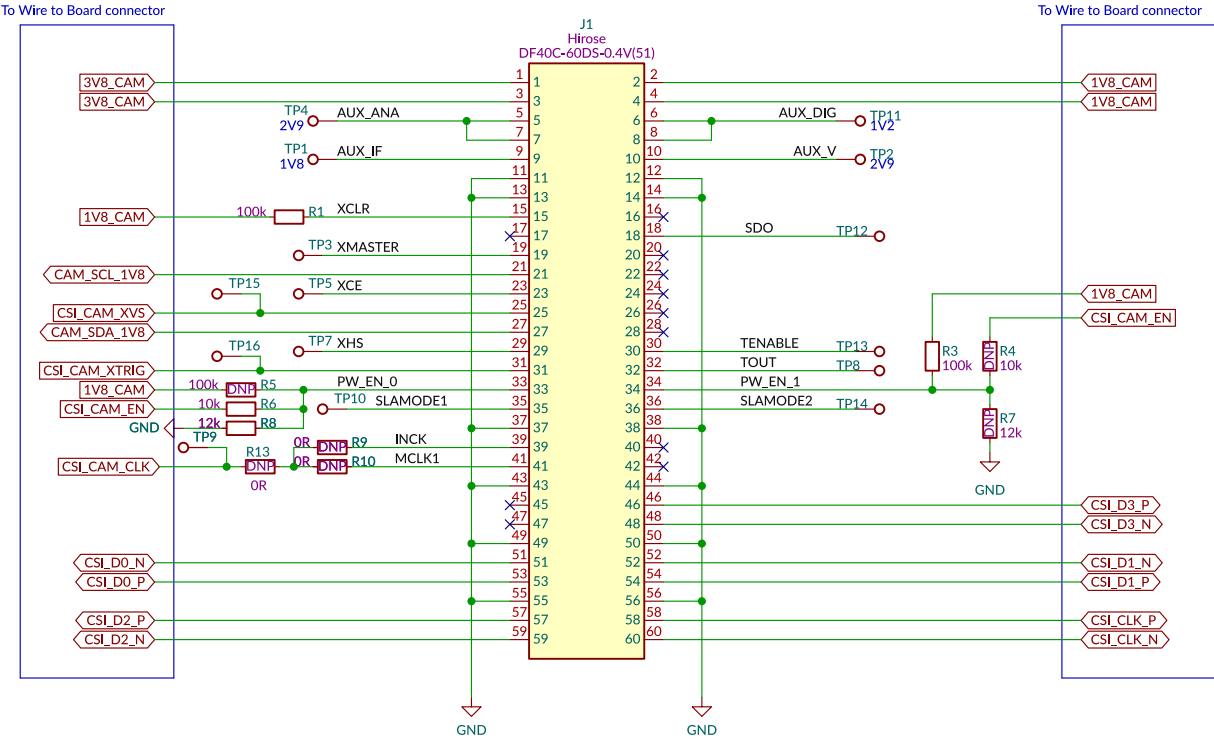



FRAMOS FSA interface




FRAMOS CSI interposer connector

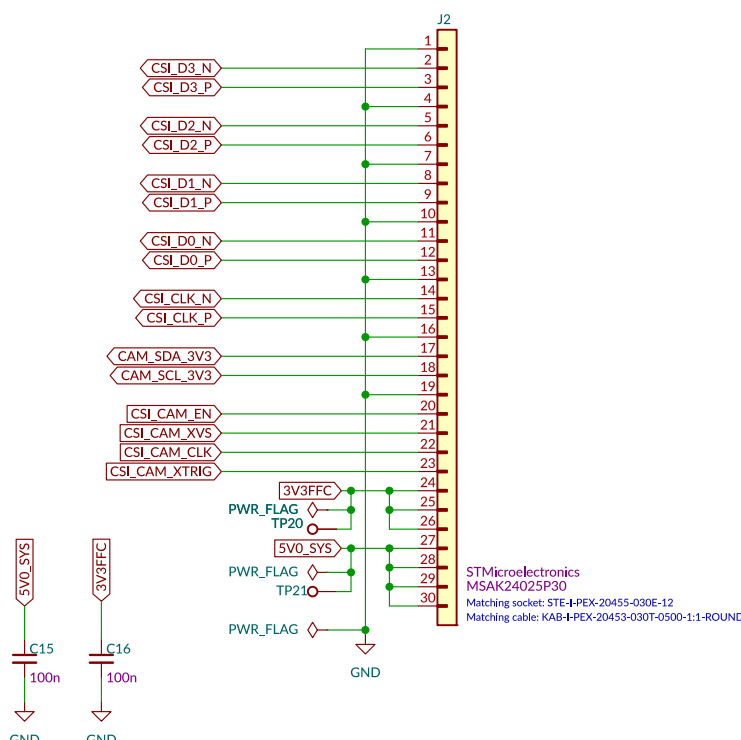


I2C logic level translator


JNB can have I2C configured as 1V8

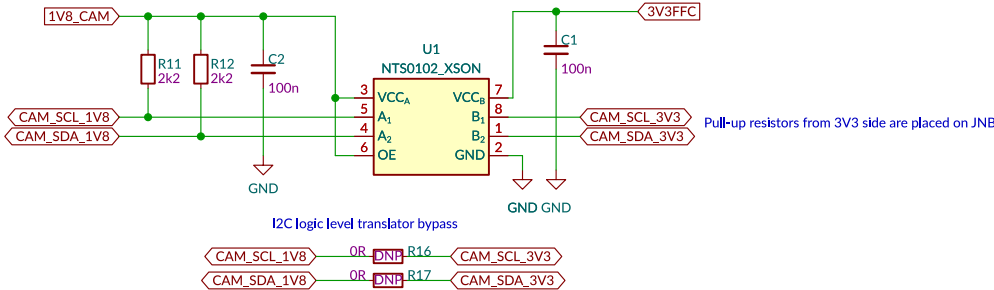


Mount holes



3V8 MIPI Camera Power

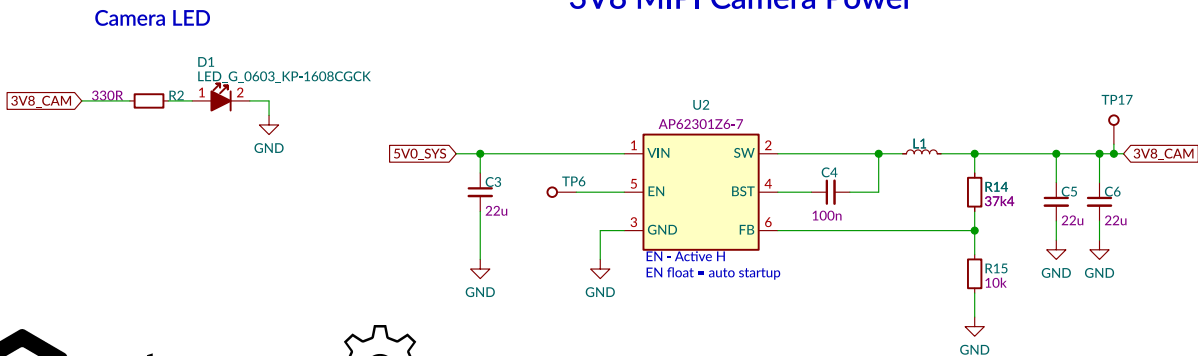

1V8 MIPI Camera Power

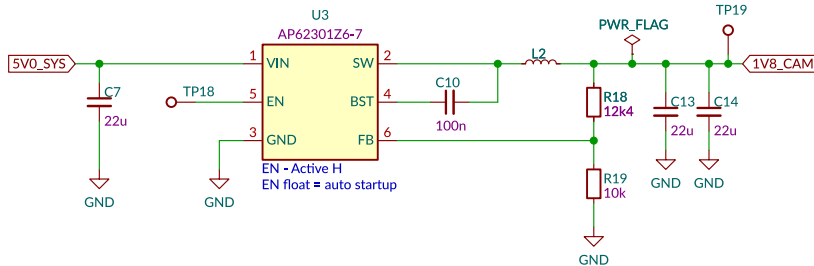

Logotypes

Logo N1 oshw_logo

Logo N2 antmicro_logo

