




Micro USB

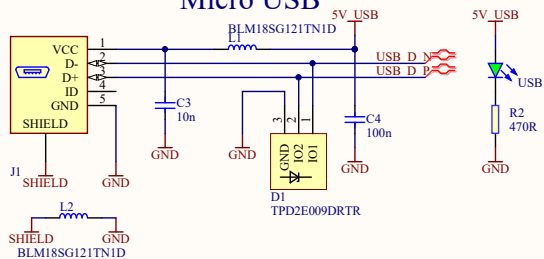


5V -> 3.3V LDO 400mA



3V3 -> 1.8V LDO 200mA






JTAG connector

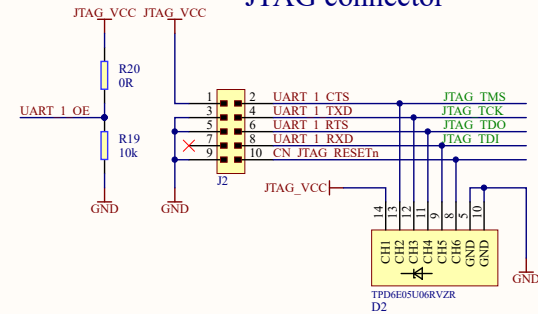


Voltage selection







IN1	IN2	VCCIOx	COM
0	1	3V3	NO2
1	0	1V8	NO1
1	1	5V0	NO3

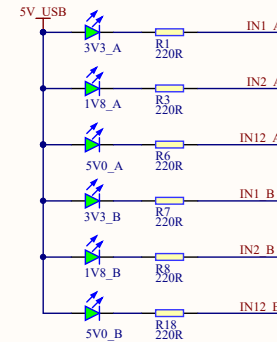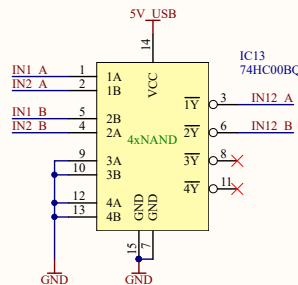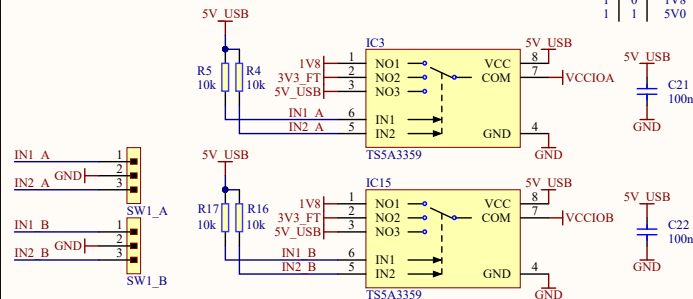



Goldpin connector



Voltage level translation

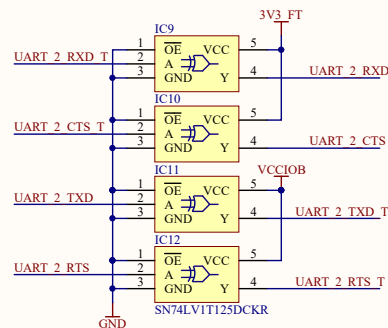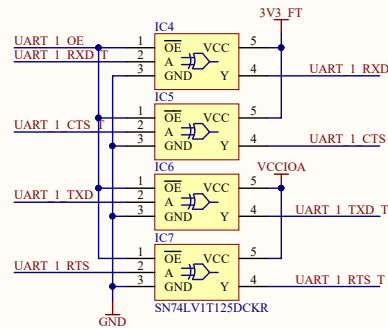

JTAG/UART to USB

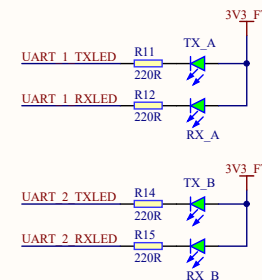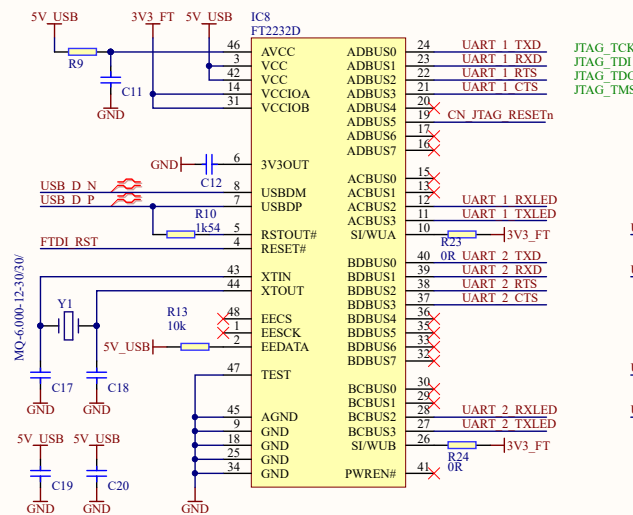

Title:

FTDI Toolkit

Drawn by: A. Nowicka

Approved by:

Size: A3

Date: 25.06.2020

File: FTDI-Toolkit.SchDoc

Page: 1 of 1

Revision: 1.0



antmicroc
Zwierzyńska 3
60-813 Poznań, Poland