




## Micro USB

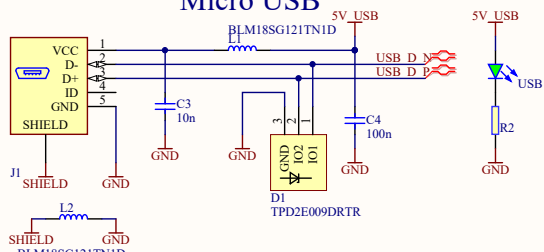


## 5V -> 3.3V LDO 400mA



## 3V3 -> 1.8V LDO 200mA





## JTAG connector

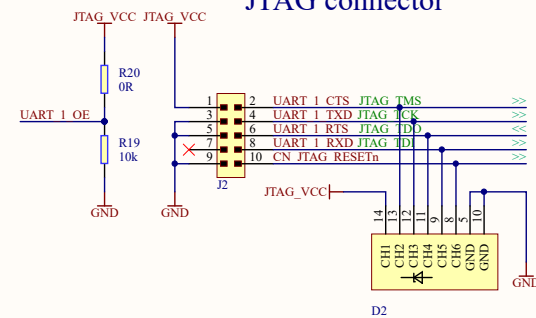


## Voltage selection


IN1	IN2	VCCIOx	COM
0	1	1V8	NO1
1	0	3V3	NO2
1	1	5V0	NO3

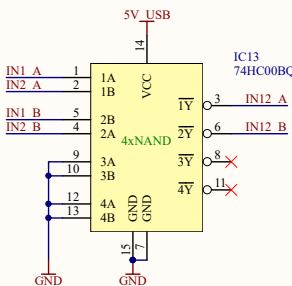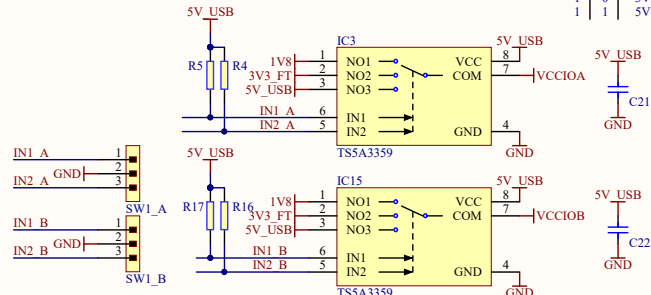

## Goldpin connector



## Voltage level translation

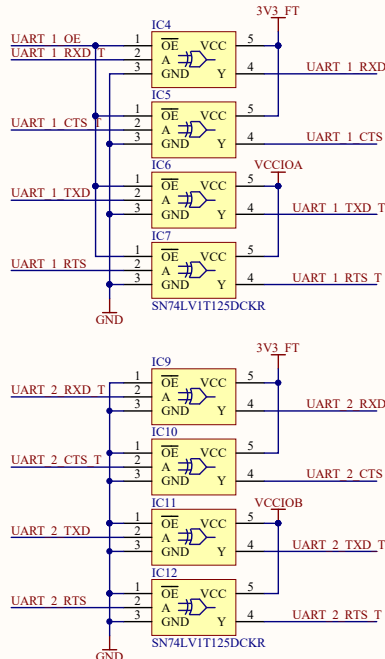

## JTAG/UART to USB

