



1	2	3	4	5	6	7	8
A							
B							
C							
D							
E							
F							

USB PD



File: usb_pd.kicad_sch

DC-DC Converters




File: dc-dc_converters.kicad_sch




www.antmicro.com		
Antmicro		
Sheet: /		
File: usb-c-power-adapter.kicad_sch		
Title: usb-c-power-adapter		
Size: A3	Date: 2025-02-05	Rev: 1.1.1:73ca2
KiCad E.D.A. 8.0.7	Id: 1/3	


USB-C PD Connector

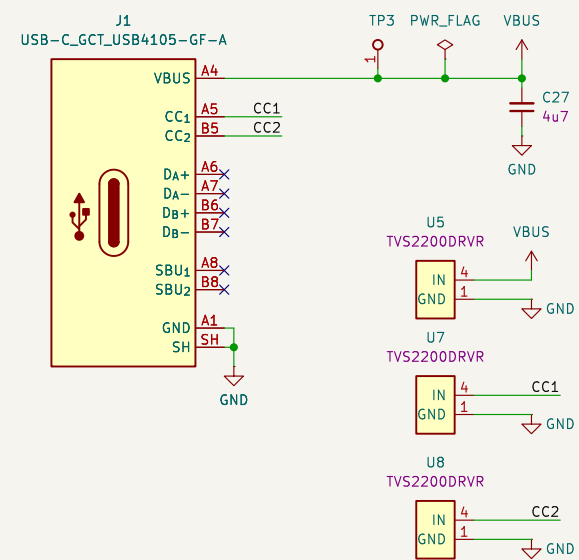


USB-C PD Controller

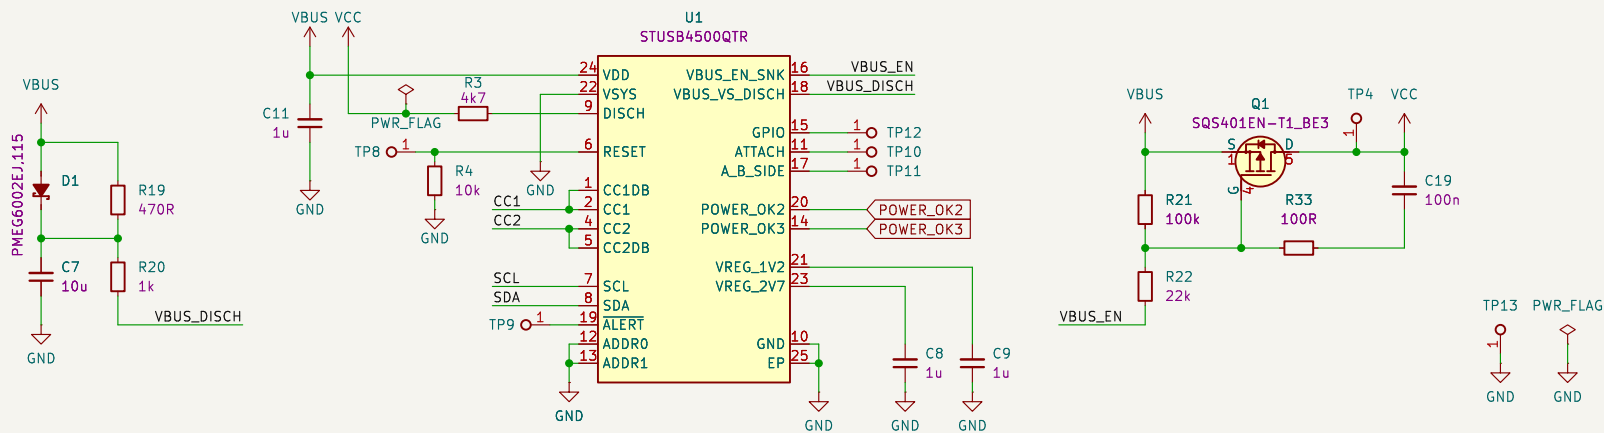

QWIIC I2C Connector

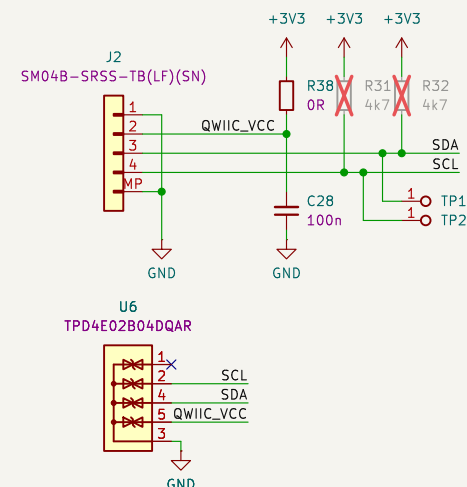

LED Indicators

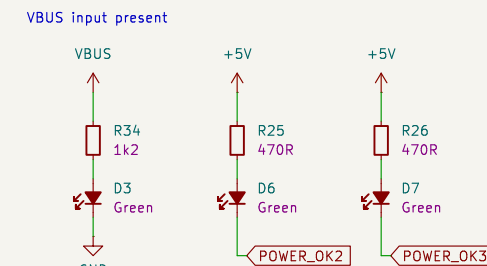


Mounting pad



Buck Converter

Assembly variants:
- 84W output (default)
- 36W output (no SIC477 DC/DC converter, direct output from PD source)

Designator	84W	36W
FB1	populated	DNP
FB2	DNP	populated
U2	populated	DNP
L1	populated	DNP

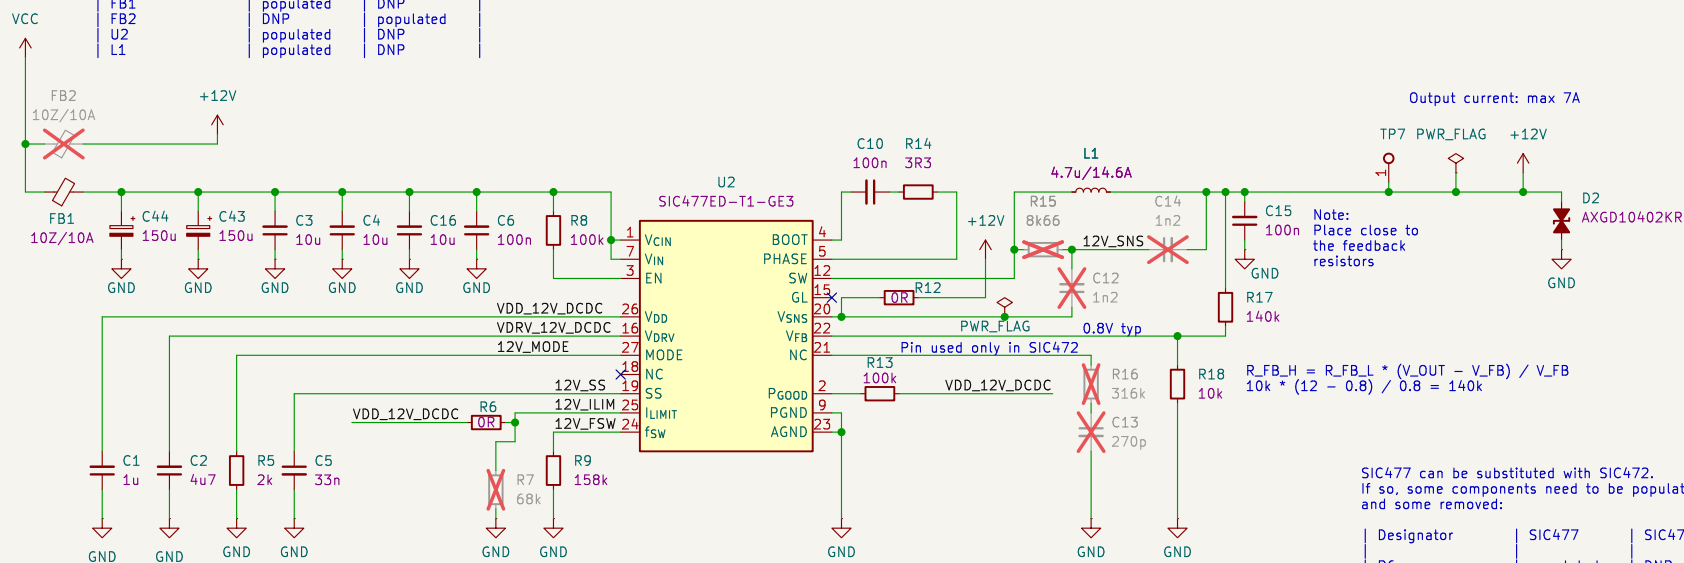


Power save mode enabled,
VDD, VDRVPre-reg on


SIC477 can be substituted with SIC472.
If so, some components need to be populated
and some removed:

Designator	SIC477	SIC472
R6	populated	DNP
R12	populated	DNP
R16	DNP	populated
R7	DNP	populated
R15	DNP	populated
C13	DNP	populated
C12	DNP	populated
C14	DNP	populated


NanoFit Output Connector

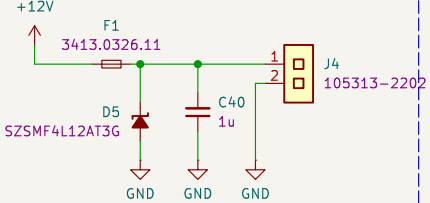


JST Power Connector

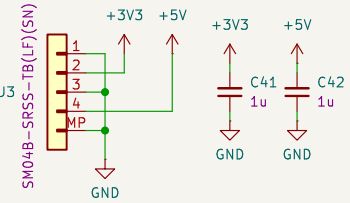

5V0 DC/DC Converter

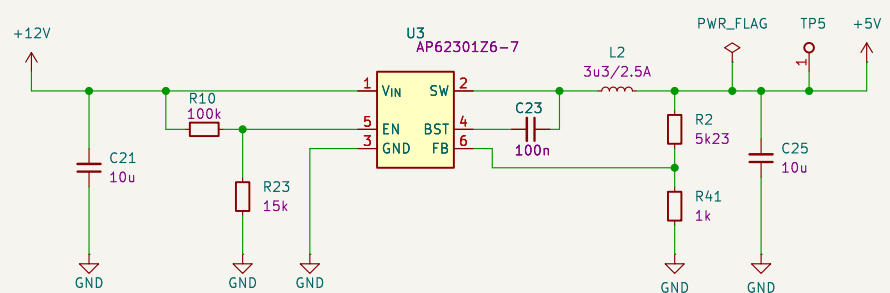

LED Indicators

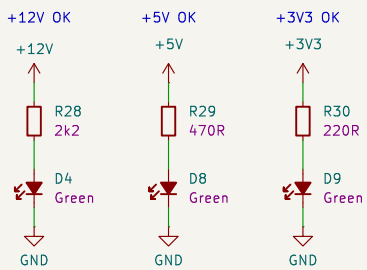

3V3 DC/DC Converter

