



RGB SWITCHES

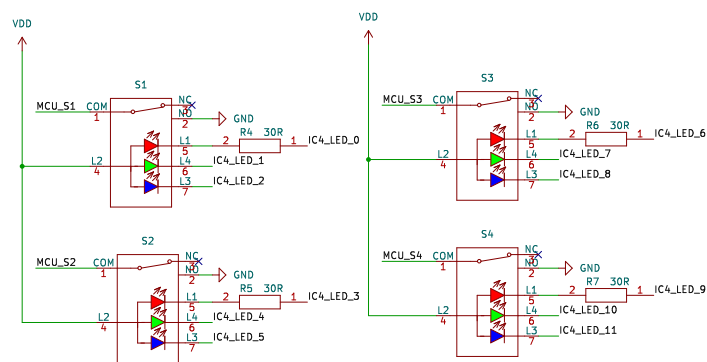


For R8 see Section 7.3.15.1 - Adjusting output peak current


RGB LED DRIVER

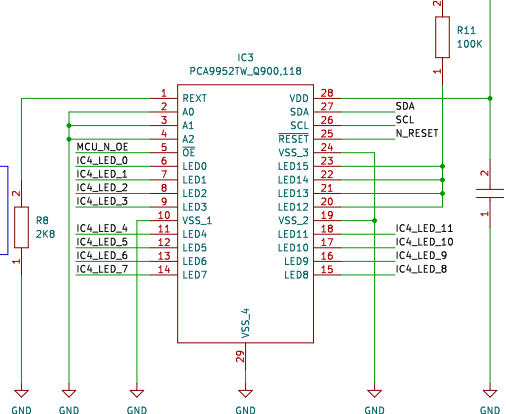


MCU + PROGRAMMING HEADER

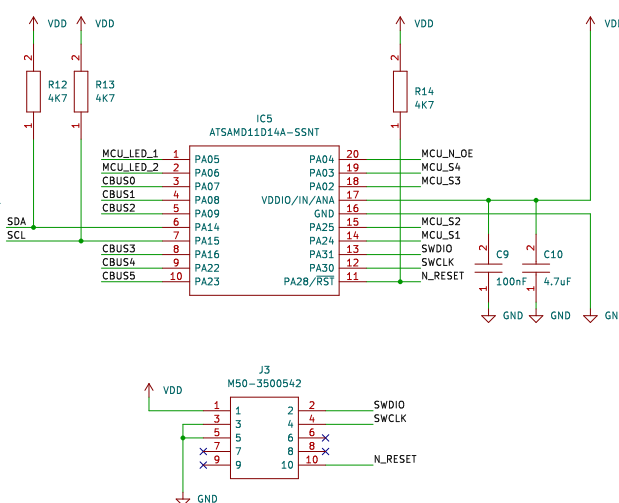


INDICATOR LEDs

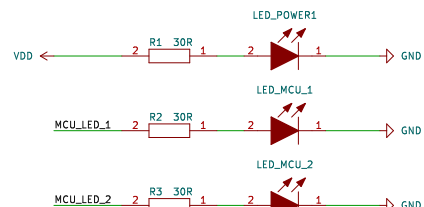


POWER MANAGEMENT

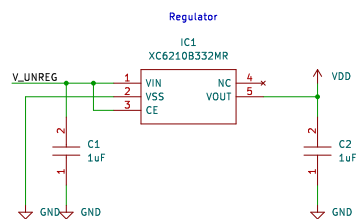


Power-on reset

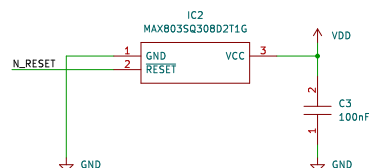

DEBUG PINOUT



FTDI CHIP + USB HEADER

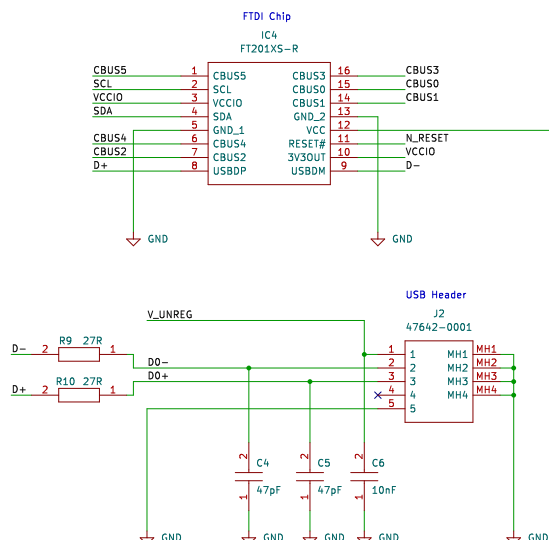

ACTIVE LOW RESET

