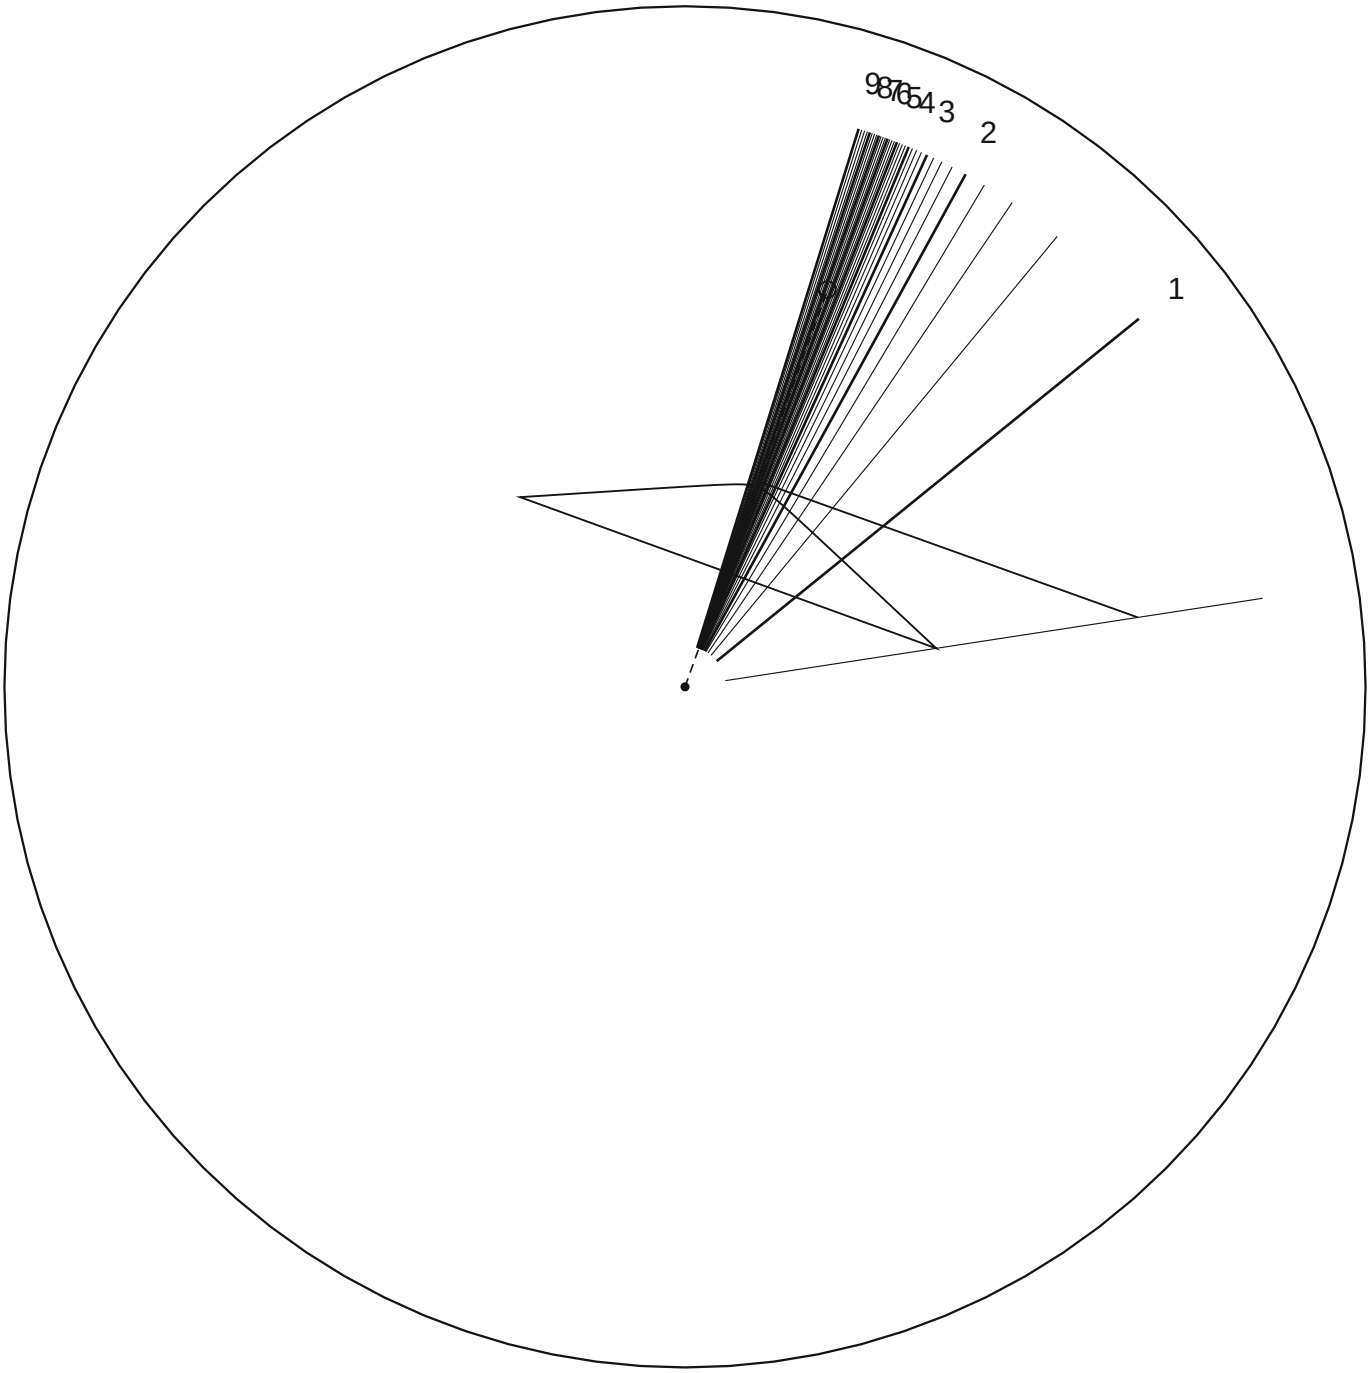


Controlled -70 deg, wall 80 deg

Controlled polar-day wall geometry. Local apparent solar hour lines; no field measurement.

100 mm calibration - verify before cutting

# Gnomon - cut and fold

A4 | plate radius 90 mm | print at Actual size / 100%



Cut the solid outline. Fold the tab 90 degrees at the dashed base. The triangle stands perpendicular to the plate; its sloping edge rises 3.4049 degrees above it.

Mount the plate on flat backing. Match the filled foot dots and the open base-end circles; align the dashed base with the plate's dashed mounting line. Secure the tab to the backing; it may overhang a fan's point.

Base 55.80 mm; rise 3.32 mm; style edge 55.90 mm. Keep the triangle upright, not laid flat on the plate.

The cross marks the nodus, 28.80 mm along the style from the filled foot dot. Add a small bead or notch there to cast a distinct date-line shadow; an ink cross alone will not do this.

Use a thin shadow-casting edge. Material thickness, kerf and fold allowance are not compensated in these templates.

Mount vertically, wall declining 80° from south, top of the design upward. The style projects out from the wall at 3.4°. Its base runs 19.7° clockwise from the upward plumb line as viewed from the front.

100 mm calibration - verify before cutting