
Assemble your sundial

3 columns x 1 row / 3 full-size sheets / A4

Radius 180 mm. Overlap 10 mm. Print one-sided at Actual size / 100%.

Disable Fit, Shrink and extra poster tiling. Check each bar and the frame's width and height.

ASSEMBLY MAP - reduced size, not a cutting template

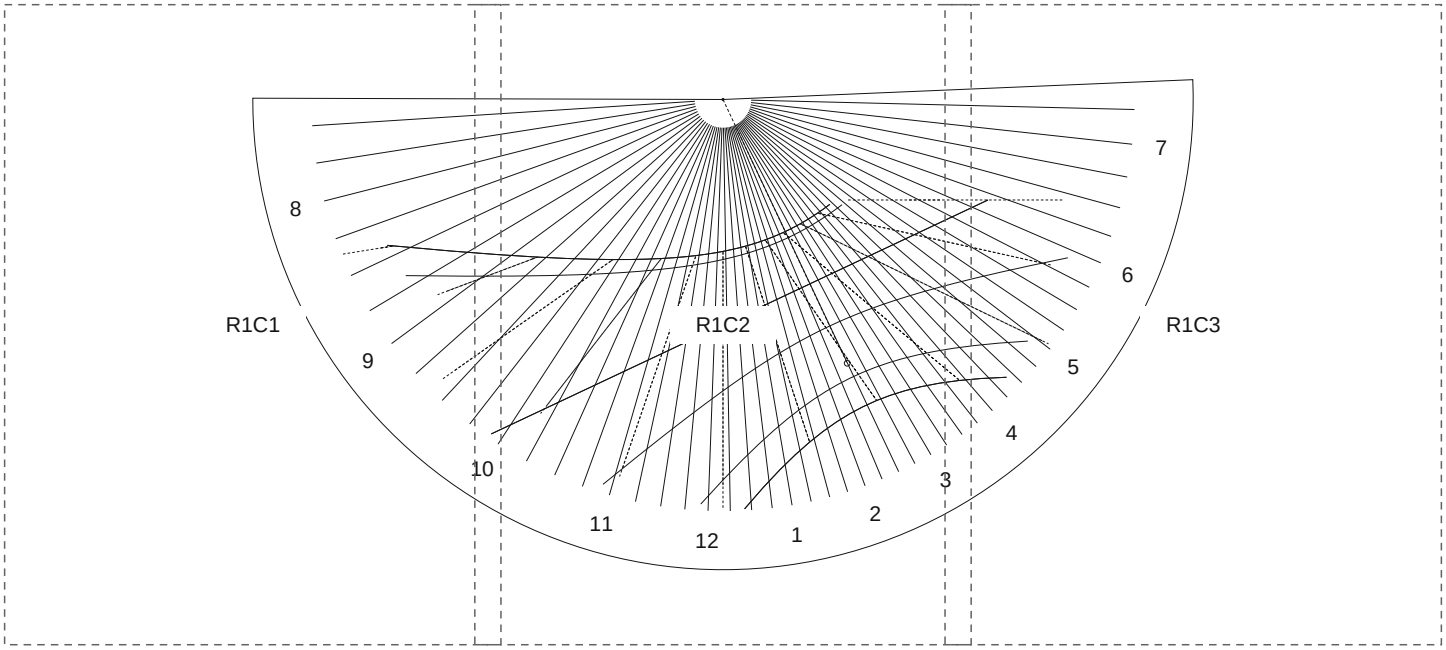

1. Keep all sheets facing the same way. Start at R1C1, then work across each row.

2. On columns after C1, trim the left blank margin at the dashed frame. On rows after R1, trim the top blank margin there. Keep the printed overlap.

3. Lay each new sheet over its neighbor's 10 mm overlap. Match both crosshair targets and the drawing. Tape the back, then cut the plate's solid outline.

Dashed frames and crosshairs are assembly aids, not dial cuts. The frame sits 10 mm from the left and right paper edges. The matching gnomon template and mounting instructions follow the plate sheets.

Vertical · 41.90° N, 12.50° E


Tempus fugit

Vertical · 41.90° N, 12.50° E. Zone time UTC+01:00; subtract the equation of time from the dial reading. Europe/Rome; design date 2026-01-15. Radius 180 mm. Mount vertically, wall declining 25° from south, top of the design upward. The style projects out from the wall at 42.4°. Its base runs 154.8° clockwise from the upward plumb line as viewed from the front. Nodus 57.6 mm along the style from its foot.

100 mm calibration - verify before cutting

R1C1 / 1 row x 3 columns

Drawing origin x 0.0 mm, y 0.0 mm | 10 mm overlaps

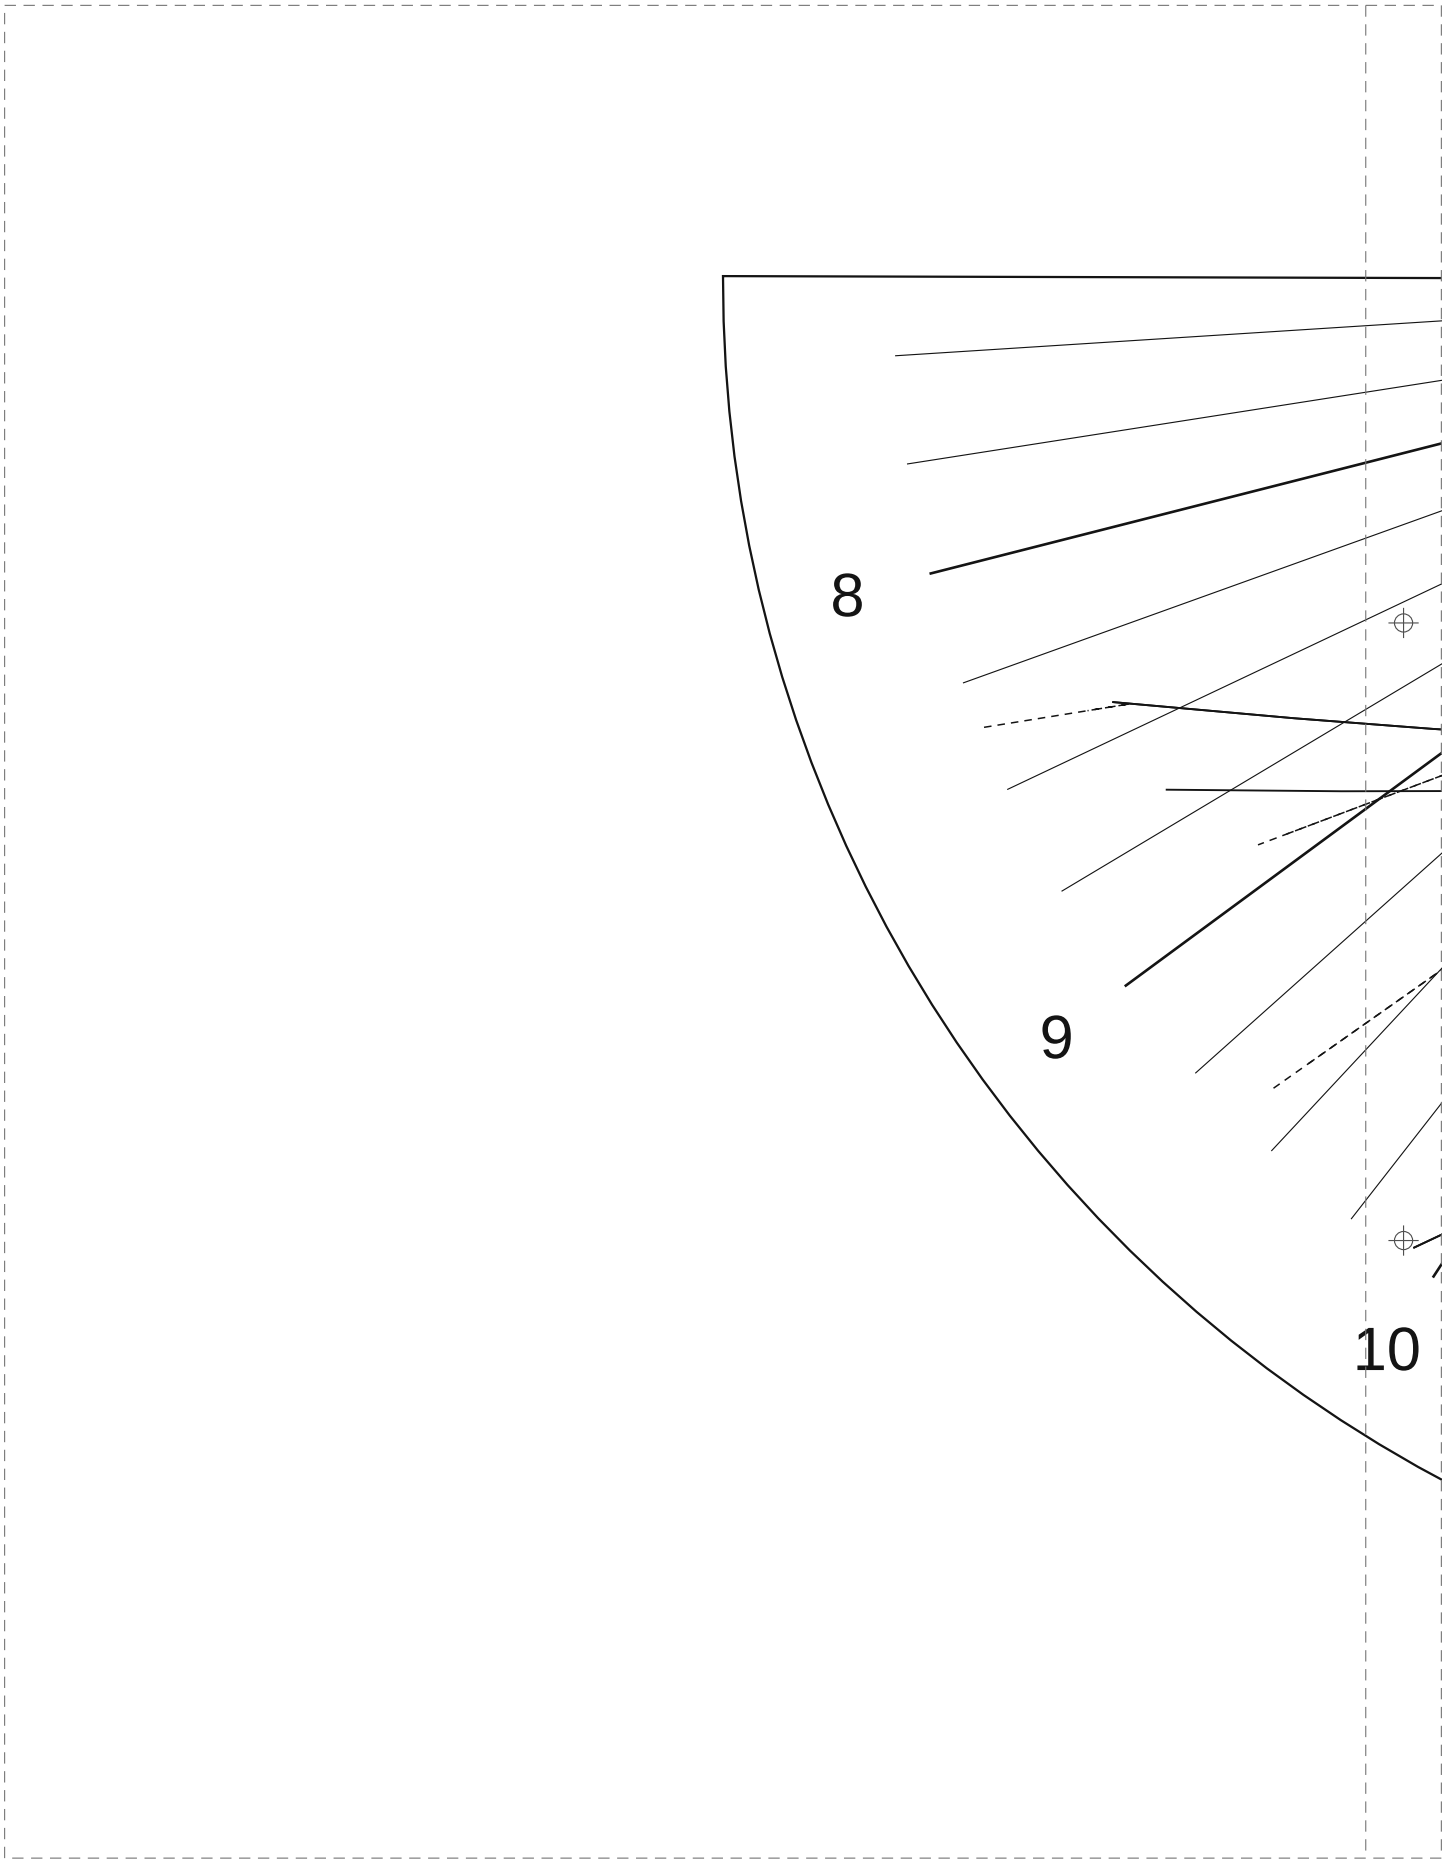

Join: right R1C2


Frame 190.0 x 245.0 mm - check both axes

Vertical · 41.90° N, 12.50° E

100 mm calibration - verify before cutting

R1C2 / 1 row x 3 columns

Drawing origin x 180.0 mm, y 0.0 mm | 10 mm overlaps

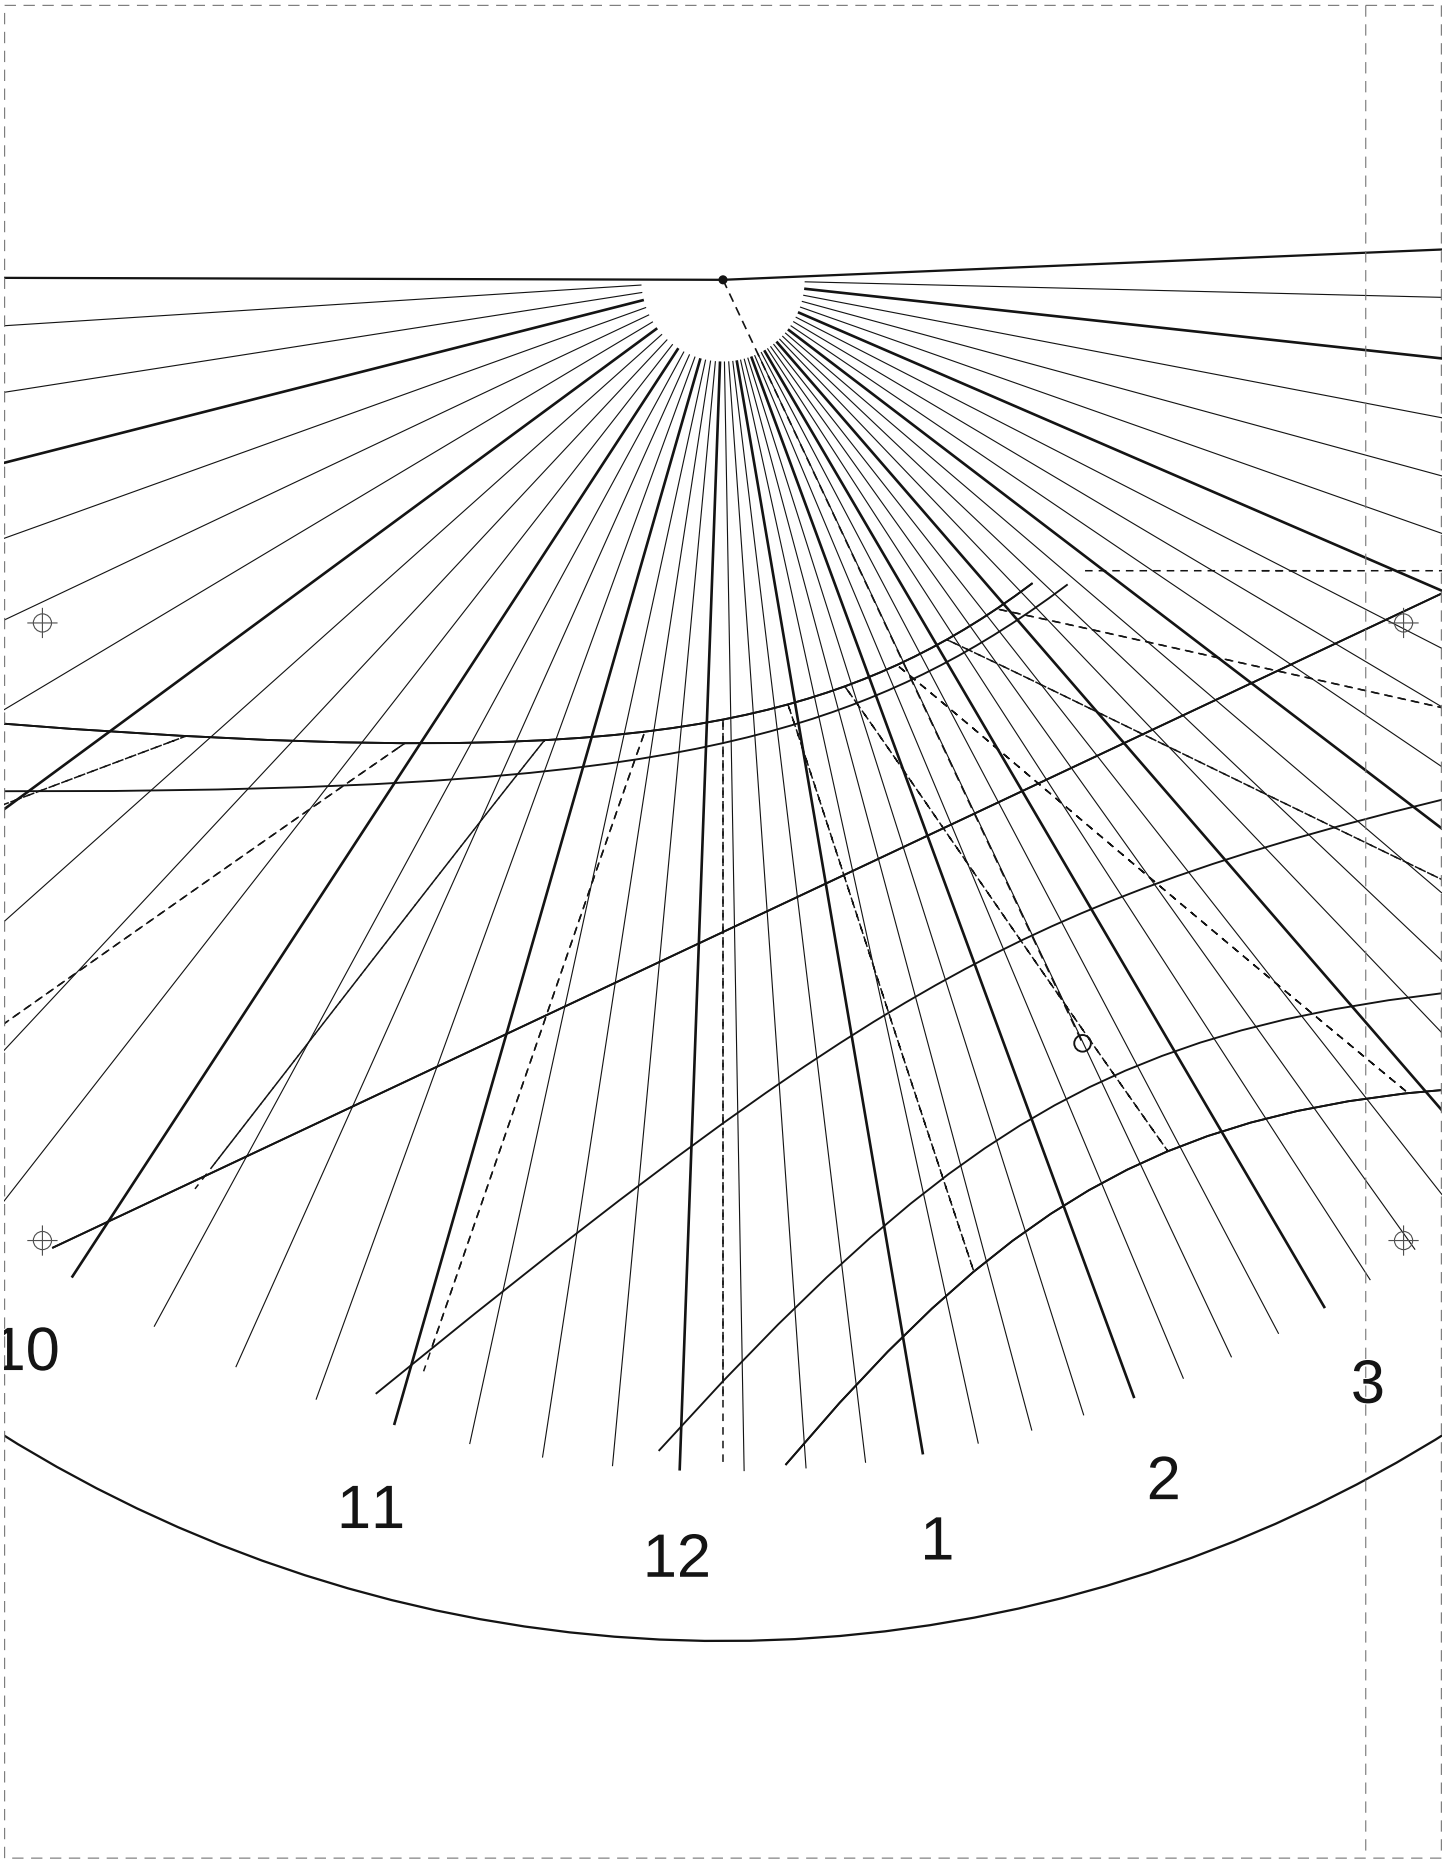

Join: left R1C1 / right R1C3


Frame 190.0 x 245.0 mm - check both axes

Vertical · 41.90° N, 12.50° E

100 mm calibration - verify before cutting

R1C3 / 1 row x 3 columns

Drawing origin x 360.0 mm, y 0.0 mm | 10 mm overlaps

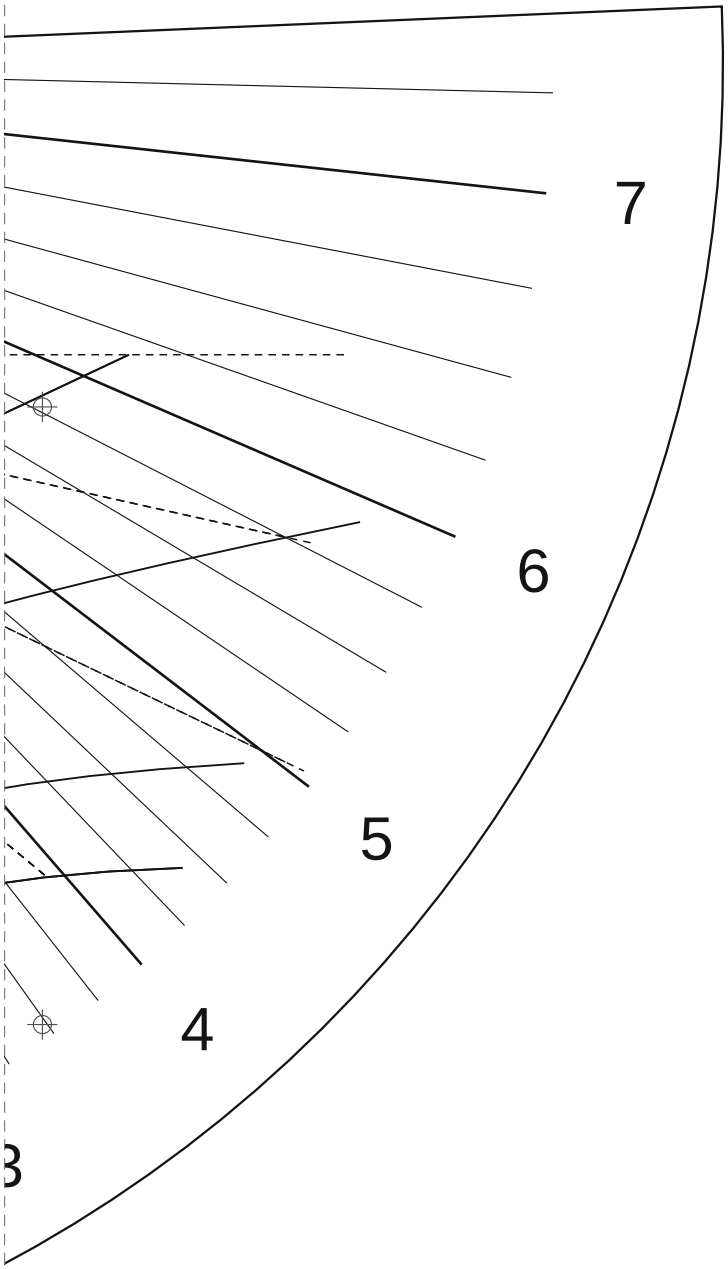

Join: left R1C2


Frame 190.0 x 245.0 mm - check both axes

Vertical · 41.90° N, 12.50° E

100 mm calibration - verify before cutting

Gnomon - cut and fold

A4 | plate radius 180 mm | print at Actual size / 100%

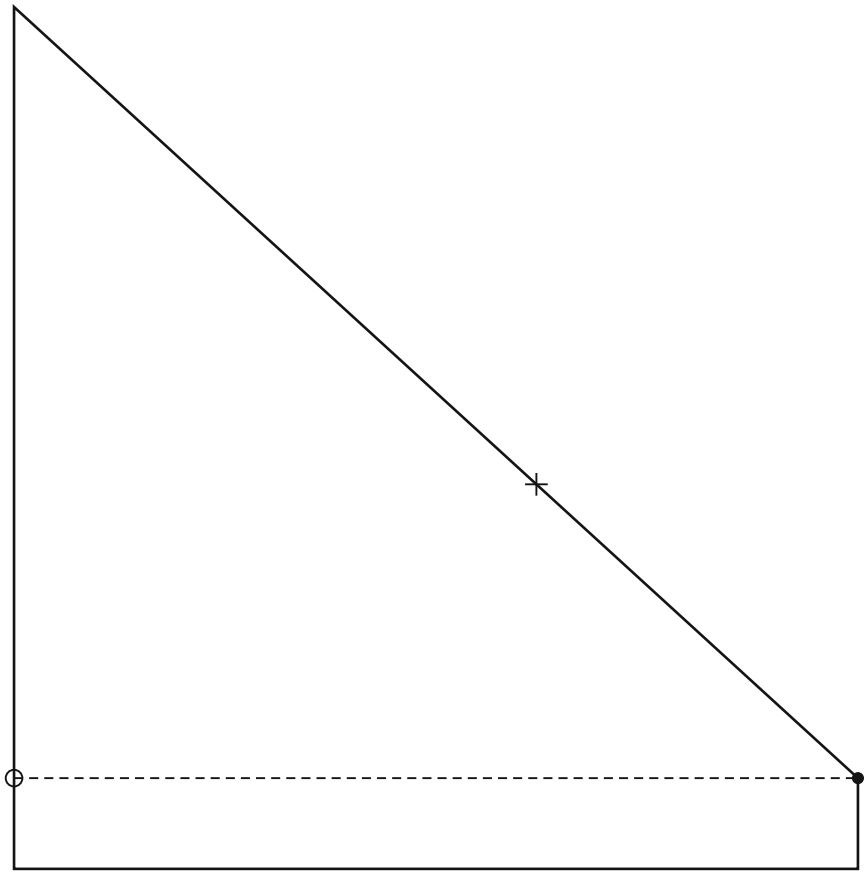

Cut the solid outline. Fold the tab 90 degrees at the dashed base. The triangle stands perpendicular to the plate; its sloping edge rises 42.4189 degrees above it.

Mount the plate on flat backing. Match the filled foot dots and the open base-end circles; align the dashed base with the plate's dashed mounting line. Secure the tab to the backing; it may overhang a fan's point.

Base 111.60 mm; rise 101.97 mm; style edge 151.17 mm. Keep the triangle upright, not laid flat on the plate.

The cross marks the nodus, 57.60 mm along the style from the filled foot dot. Add a small bead or notch there to cast a distinct date-line shadow; an ink cross alone will not do this.

Use a thin shadow-casting edge. Material thickness, kerf and fold allowance are not compensated in these templates.

Mount vertically, wall declining 25° from south, top of the design upward. The style projects out from the wall at 42.4°. Its base runs 154.8° clockwise from the upward plumb line as viewed from the front.

100 mm calibration - verify before cutting