

SunStorage PRO

STE-2ML-1MP

All-in-One Design

Storage System for
C&I Scenario



Hybrid Cooling System

A liquid-cooled battery cooling system combined with an air-cooled PCS cooling system provides dual assurance for system efficiency.



All-in-One Design

Highly integrated 3S system, cooling system, and fire protection system, delivering greater capacity within a smaller footprint.




String-Based Solution

Each battery cluster is independently managed, ensuring higher efficiency and system stability.



Standard 20ft Container

Pre-tested and pre-installed before delivery, enabling easy transportation, simple commissioning, and shorter lead times.

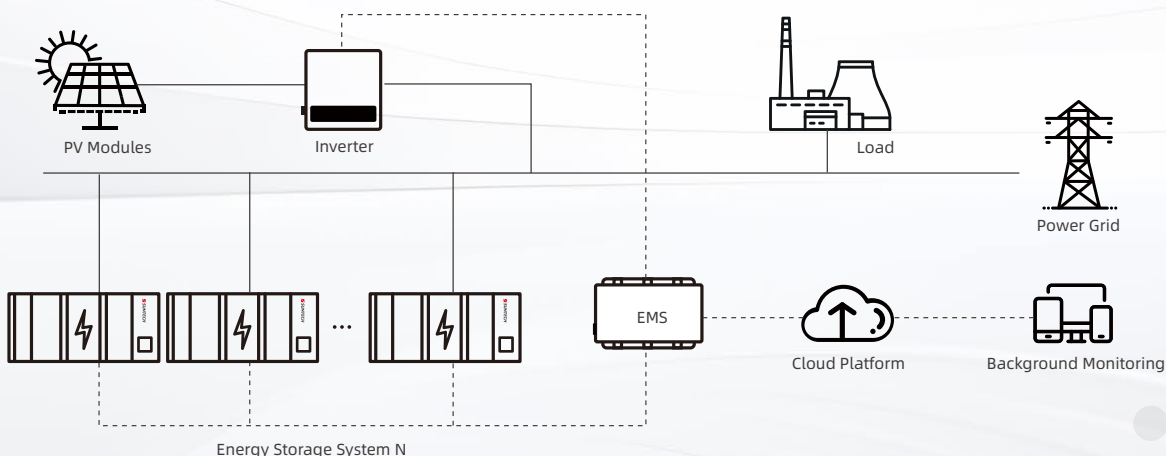

Model	STE-2ML-1MP
DC Side	
Cell Type	LFP/314Ah
Pack Connection	1P48S
Pack Capacity(kWh)	48.23
Battery System Connection	9P240S
Battery System Capacity(kWh)	2170.3
Rated System Voltage(V)	768
Working System Voltage Range(V)	672~864
Pack Ingress Rating	IP65
Charge Working Temperature(°C)	5~55
Discharge Working Temperature(°C)	-10~50
Cooling System	Smart liquid cooling
AC Side	
DC Input Voltage(V)	680~950
Maximum DC Input Current(A)	203
Grid Power Factor	0.99
Cooling System	Air cooling
Rated Power(kW)	1125(125*9)
Max. Power(kW)	1237
THDi	≤3%
DC Ratio	<0.5%LPN
Nominal Voltage(V)	400Vac/3P+N+PE
Power Factor	-1 lagging~1 leading
Nominal Frequency(Hz)	50/60
General Data	
System Efficiency	≥88%
Charge/Discharge Rate	0.5P
DOD	95%(25±2°C)
Cycle Life	8000 cycles @ ±25°C,95% DOD,0.5P
Communication	Ethernet/RS485
Ingress Rating	IP55
Cooling System	Liquid Cooled + Forced Air Cooled
Operating Temperature(°C)*	-25~55
Humidity	5~95%RH, non-condensing
Noise(dB)	≤80
Altitude(m)	≤2000(derating above 2000)
Fire Suppression System	Aerosol system(pack level and container level) , water spray system
Dimensions(W×D×H mm)	6058×2438×2591
Weight(kg)	25000
Compliance	UN38.3, IEC62477-1, CE/EMC, IEC62619, IEC63056, UL9540A, IEC62933, EN50549

*: Power derating above 45°C