Direct stick test - layout of the 10-stick arrow (design B, barbed head)

The test needs only the 10 sticks connected; they do not have to be fixed in this shape.

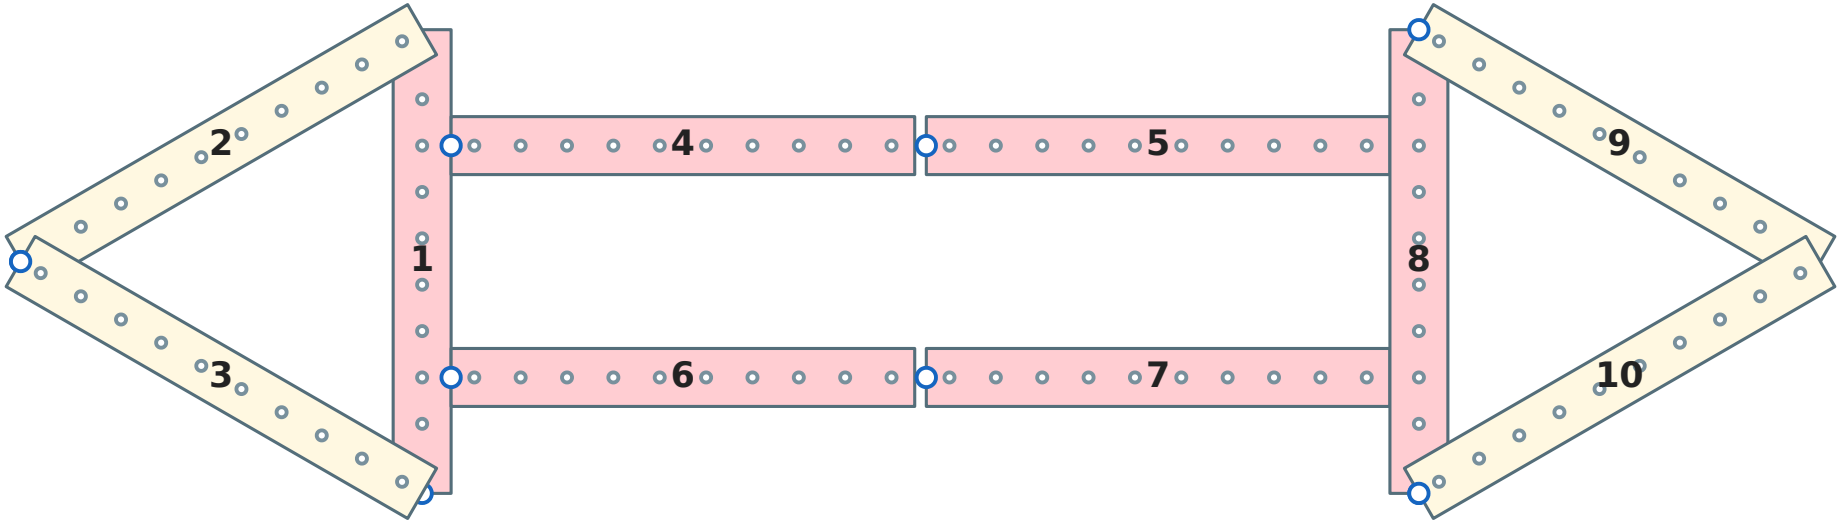

about 31 cm wide, 9 cm high (the exact size depends on the gaps)

Blue dot = data-in end (LED 1) of the stick. Each stick: 80 x 10 x 10 mm, 10 LEDs.

Stick -> Arduino data pin (sketch order)

- Stick 1 D2 left cap
- Stick 2 D3 left upper wing
- Stick 3 D4 left lower wing
- Stick 4 D5 top rail, left
- Stick 5 D6 top rail, right
- Stick 6 D7 bottom rail, left
- Stick 7 D8 bottom rail, right
- Stick 8 A0 right cap
- Stick 9 A1 right upper wing
- Stick 10 A2 right lower wing

Wings are at 30 degrees: with 80 mm sticks the wing spans 69 mm along the shaft and 40 mm across it.

Stick 11 A3 spare, not part of the arrow: the Grove Base Shield for the Mega has 11 connectors with a data pin, so this test also drives an 11th stick if you have one (set ACTIVE_STICKS in sketch.ino).