

COMPUTER NETWORKS (CS F303) Second Semester 2018-2019 LAB-SHEET – 2

Objectives:

- To learn the working of FTP protocol using Wireshark
- To understand use and working of DNS protocol.
- To understand different types of delays associated in packet switched networks using Traceroute

This lab is divided into three parts.

In part one, we will continue doing the experiments with Wireshark to analyze and understand various application layers' protocols. In this lab our focus would be on another very important application layer protocol called File Transfer Protocol.

In the second part of the lab, we will try to understand the working principles of domain name system with the help of Wireshark capture and useful networking command called "nslookup".

Finally, in the third part, we will learn another useful networking tool called traceroute, which is very much required by any networking professional to manage the network and also to troubleshoot the problems during the time when the network is down or some site is not accessible.

Part 1: Understanding the functioning of File Transfer Protocol (FTP) using Wireshark

FTP: File Transfer Protocol

FTP is a commonly used application over the Internet for file transfer. The file transfer provided by FTP copies a complete file from one system to another system. To use FTP, we need an account to login on the FTP server.

Figure 1, shows the arrangement of the client and server and the two connections between them.

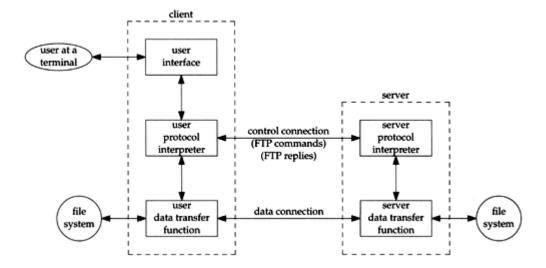


Fig. 1



FTP Commands

The commands and replies sent across the control connection between the client and server are in NVT ASCII (7 bit ASCII). This requires a CR (carriage return), LF (line feed) pair at the end of each line (i.e., each command or each reply). The commands are 3 or 4 bytes of uppercase ASCII characters, some with optional arguments. More than 30 different FTP commands can be sent by the client to the server. Table below shows some of the commonly used commands in windows operating system.

Command	Description
lcd	Displays local directory
1s filelist	list files or directories
?	Accesses the help screen
Delete filename	Deletes a file from server
quit	logoff from server
get filename	retrieve (get) a file
put filename	store (put) a file

You will find that sometimes there is a one-to-one correspondence between what the user types and the FTP command sent across the control connection, but for some operations a single user command (**what you type in the terminal**) results in multiple FTP commands across the control connection.

The FTP server sends file listings back across the data connection, rather than as multiline replies across the control connection. Unlike control connection which stays up for the duration of the client-server connection, the data connection can come and go, as required.

The usual procedure is as follows:

- 1. The creation of the data connection is under control of the client, because it's the client that issues the command that requires the data connection (get a file, put a file, or list a directory).
- 2. The client normally chooses an **ephemeral port number** on the client host for its end of the data connection. The client issues a passive open from this port or starts listening on this port
- 3. The client sends this port number to the server across the control connection using the **PORT command**.
- 4. The server receives the port number on the control connection, and issues an active open (try to connect) to that port on the client host. The server's end of the data connection always uses port 20.

Lab Exercise-1: An Interactive FTP Session

1. To start an FTP interactive session type "ftp" from a DOS Command window.

$C:\$ ftp

The DOS prompt should be replaced with the FTP prompt. The FTP program is now running on the local system. A connection (or session) to a remote system has not been established.



2. The help command or ? (question mark) may be executed without being attached to a remote system and will do a print (usually to the screen) of the FTP commands. The following is an example of an FTP Command to display the FTP Help information.

ftp> help

3. The following FTP Command will perform the FTP OPEN (make the connection) and display the following messages.

ftp> open 172.22.1.129

Username: csis, Password: csis

4. The following FTP Command will copy a file from the local system to the remote system and display the information.

ftp> put C:\Users\Dell\Documents\readme.txt (This file could be anything from your local computer)

ftp> quit

Lab Exercise-2: Understanding FTP protocol details using Wireshark

Identify TCP Header Fields and Operation Using a Wireshark FTP Session Capture

Step 1: Start a Wireshark capture.

- a) Close all unnecessary network traffic, such as the web browser, to limit the amount of traffic during the Wireshark capture.
- b) Start the Wireshark capture.

Step 2: Log on to the FTP server

- a) From the command prompt, enter ftp 127.22.1.129
- b) Enter Username: csis
- c) Enter Password: csis
- Step 3: Locate and download the README.txt file from the server.
- Step 4: ftp quit
- **Step 5: Stop the Wireshark capture.**
- Step 6: View the Wireshark Main Window.

Wireshark would have captured many packets during the FTP session. To limit the amount of data for analysis, type tcp and ip.addr = 172.22.1.129 in the Filter: entry area and click Apply. The IP address, 172.22.1.129, is the address for our FTP server.

Analyze the TCP header fields:

After the TCP filter has been applied, the first three frames in the packet list pane (top section) displays the transport layer protocol TCP creating a reliable session. The sequence of [SYN], [SYN, ACK], and [ACK] illustrates the three-way handshake. (Let us not get into details of SYN, SYN, ACK...., we will learn about them in due course of time!!!)

TCP is routinely used during a session to control datagram delivery, verify datagram arrival, and manage window size. For each data exchange between the FTP client and FTP server, a new TCP session is started. At the conclusion of the data transfer, the TCP session is closed. Finally, when the FTP session is finished, TCP performs an orderly shutdown and termination.

In Wireshark, detailed TCP information is available in the packet details pane (middle section).

Highlight the first TCP datagram from the host computer, and expand the record.

Lab Exercise-3: Understand the working of FTP

Answer the following questions.

- 1. Did you see an OPTS request going from client to server? What is the purpose of this command?
- 2. Locate the PORT command in the Wireshark trace and try to correlate it with the command entered by you in the ftp terminal. Analyze the parameters of PORT command.
- How the server is able to send PORT command successful, even when the three-way handshake required to complete the TCP connection that got initiated due to PORT command has not been completed.
- 4. The FTP server sends file listings back across the data connection, rather than as multiline replies across the control connection. Try to verify this fact by listing the remote directory using "dir" command and analyzing the Wireshark packet capture.

Part 2: Understanding the functioning of Domain Name System DNS Protocol using Wireshark and *nslookup* command.

Domain Name System

DNS i.e. Domain Name System is the method that the Internet uses to attach human-usable domain names to the machine-usable IP addresses that are almost never seen by the users. It is a hierarchical, decentralized naming system which is distributed in nature.

To understand the process of IP address resolution in DNS with the help of Wireshark lets perform the following experiment.

Lab Exercise-4:

Step 1: Start a Wireshark capture.

- a) Close all unnecessary network traffic, such as the web browser, to limit the amount traffic during the Wireshark capture.
- b) Start the Wireshark capture.
- Step 2: Run the following command from the command prompt

nslookup bits-pilani.ac.in

Step 3: Stop the Wireshark capture.

Step 4: View the Wireshark Main Window.

Answer the following questions by observing traffic captured using Wireshark:

- 1. Locate the DNS query and response messages. Are they sent over UDP or TCP?
- 2. To what IP address is the DNS query message sent?
- 3. What is the destination port for the DNS query message?
- 4. What is the source port of DNS response message?
- 5. Examine the DNS response message.



Repeat the same experiment by running the following command at step 2 **nslookup -type=NS bits-pilani.ac.in** and try to answer the same questions.

Command	Output
C:\Users\Dell>nslookup	Server: UnKnown
bits-pilani.ac.in	Address: 199.7.87.1
a0.in.afilias-nst.info	Name: bits-pilani.ac.in
	Served by:
	ns1.bits-pilani.ac.in
	117.220.175.227
C:\Users\Dell>nslookup	Server: UnKnown
google.com	Address: 172.24.2.71
	Non-authoritative answer:
	Name: google.com
	Addresses: 2404:6800:4009:807::200e
	216.58.199.174
C:\Users\Dell>nslookup	Server: UnKnown
-type=NS google.com	Address: 172.24.2.71
	Non-authoritative answer:
	google.com nameserver = ns2.google.com
	google.com nameserver = ns3.google.com
	google.com nameserver = ns4.google.com
	google.com nameserver = ns1.google.com
	ns3.google.com internet address = 216.239.36.10
C:\Users\Dell>nslookup	Server: ns2.google.com
google.com	Address: 216.239.34.10
ns2.google.com	Name: google.com
	Addresses: 2404:6800:4009:807::200e
	216.58.199.174
C:\Users\Dell>nslookup	Server: UnKnown
8.8.8.8	Address: 172.24.2.71
	Name: google-public-dns-a.google.com
	Address: 8.8.8.8
C:\Users\Dell>nslookup	Server: google-public-dns-a.google.com
bits-pilani.ac.in google-	Address: 8.8.8.8
public-dns-a.google.com	
	Non-authoritative answer:
	Name: bits-pilani.ac.in
	Address: 202.78.175.227



Lab Exercise-5:

Run the following commands from the command prompt. We have provided here the corresponding output for each command. The output in your terminal may not be exactly same as the output provided here. Understand and describe the meaning/purpose of the commands and their corresponding output. (e.g., Different DNS records, i.e. A, NS, MX, CNAME and their purpose.)

Part 3: Traceroute Program- A handy debugging tool for network administrators

The Traceroute program, written by Van. It lets us see the route that IP datagrams follow from one host to another.

Although there are no guarantees that two consecutive IP datagrams from the same source to the same destination follow the same route, most of the time they do.

Traceroute uses ICMP (don't worry if you do not understand the ICMP protocols at this point in time) and the TTL field in the IP header. The TTL field (time-to-live) is an 8-bit field that the sender initializes to some value. Each router that handles the packet (datagram) is required to decrement the TTL by either one. The purpose of the TTL field is to prevent datagrams from ending up in infinite loops, which can occur during routing transients.

When a router gets an IP datagram, whose TTL is either 0 or 1 it must not forward the datagram. (A destination host that receives a datagram like this can deliver it to the application, since the datagram does not have to be routed. Normally, however, no system should receive a datagram with a TTL of 0.) Instead the router throws away the datagram and sends back to the originating host an ICMP "time exceeded" message. The key to Traceroute is that the IP datagram containing this ICMP message has the router's IP address as the source address.

We can now guess the operation of Traceroute. It sends an IP datagram with a TTL of 1 to the destination host. The first router to handle the datagram decrements the TTL, discards the datagram, and sends back the ICMP time exceeded. This identifies the first router in the path. Traceroute then sends a datagram with a TTL of 2, and we find the IP address of the second router. This continues until the datagram reaches the destination host. But even though the arriving IP datagram has a TTL of 1, the destination host won't throw it away and generate the ICMP time exceeded, since the datagram has reached its final destination. **How can we determine when we've reached the destination?**

Traceroute sends UDP datagrams to the destination host, but it chooses the destination UDP port number to be an unlikely value (larger than 30,000), making it improbable that an application at the destination is using that port. This causes the destination host's UDP module to generate an ICMP "port unreachable" error when the datagram arrives. All Traceroute needs to do is differentiate between the received ICMP messages-time exceeded versus port unreachable-to know when it's done.

We're now ready to run traceroute and see the output. To perform the experiment, We'll use a **Traceroute** available online at the website http://traceroute.nmonitoring.com/

Following is the output we got when, we performed the traceroute for "**google.com**". You can directly write the domain name (like google.com) or the IP address of that domain to run the Traceroute program.

traceroute to 172.217.23.238 (172.217.23.238), 30 hops max, 60 byte packets

- 1 praha-4d-c1-vl55.masterinter.net (77.93.199.253) 3.650 ms 3.718 ms 3.838 ms
- 2 v11387.cr3.r1-8.dc1.4d.prg.masterinter.net (83.167.254.150) 0.148 ms 0.357 ms 0.366 ms
- 3 72.14.214.168 (72.14.214.168) 0.387 ms 0.376 ms 0.375 ms
- 4 108.170.245.49 (108.170.245.49) 0.285 ms 0.295 ms 108.170.245.33 (108.170.245.33) 0.274 ms
- 5 108.170.238.155 (108.170.238.155) 0.365 ms 108.170.238.157 (108.170.238.157) 0.337 ms 108.170.238.155 (108.170.238.155) 0.313 ms
- 6 prg03s06-in-f14.1e100.net (172.217.23.238) 0.192 ms 0.185 ms 0.235 ms

Lab Exercise-6: Once you run the Traceroute from your computer, the output received by you may not be exactly same as above. (Note: It is suggested that you try it yourself.)

Now try to answer the following.

- 1. Explain the meaning of first line of the output.
- 2. The next two lines in the output begin with the TTL, followed by the name of the host or router its IP address and three different time values. What these time values signifies?
- 3. How we can calculate the per hop time value?

Repeat the above experiment for the BITS Pilani web site and **iitd.ac.in** and observe the output

Lab Exercise-7:

Answer the following:

- 1. Did you observe the character * in few lines of the output for any of the trace route? If yes, then what does it mean?
- 2. Did you see the last hop in your output as the destination you are looking for? If no, then what could be the reason for this?
