


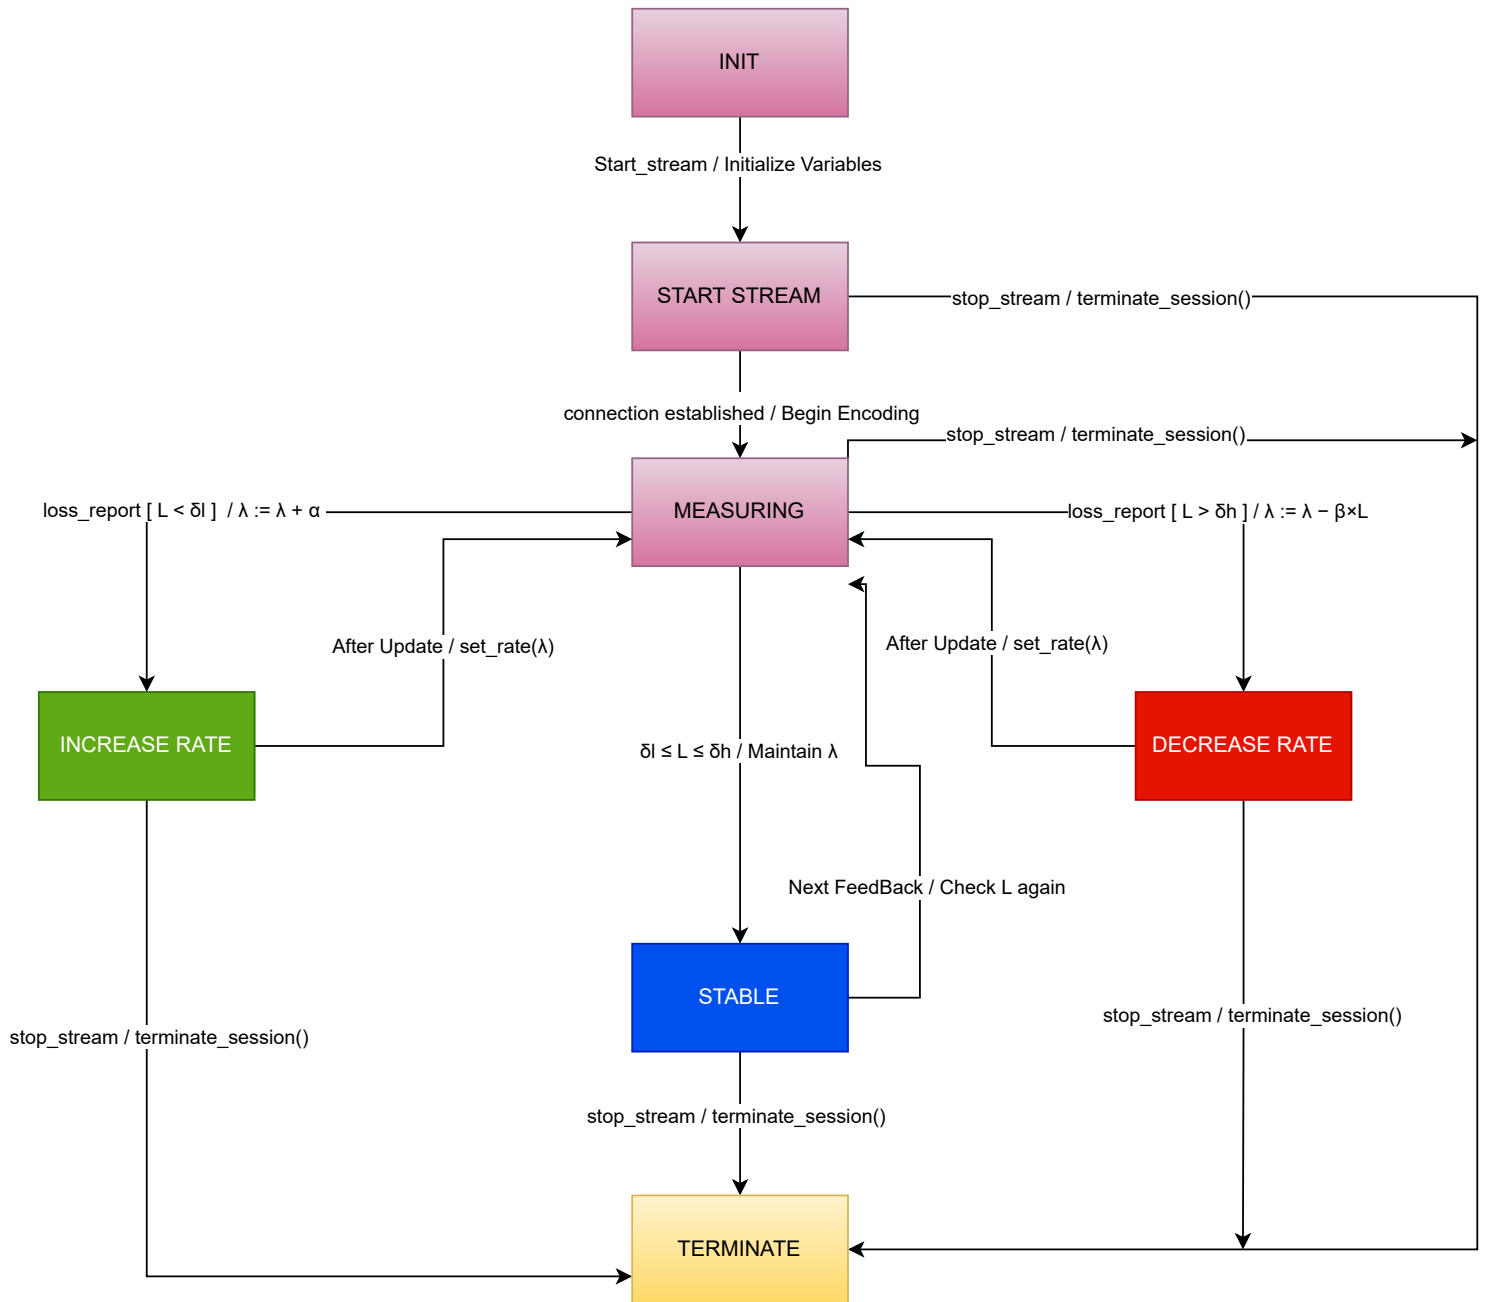

Parameters:

α = additive increase constant

β = multiplicative decrease factor

$\delta l, \delta h$ = loss thresholds

λ = current transmission rate

T_{report} = control interval

Receiver measures loss & delay every T_{report} ms
Sender updates rate λ accordingly using AIMD control