## 0101 KSS WIRING DUCT (SLOTTED)


- Material: UL94V-0 and M1 flame rated, UL approved PVC.
- Color: Grey.
- PVC service temperature: 85°C
- UL Test up to 50°C
- These devices are for routing of wires within devices in factory installations.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.
- \*The standard wiring duct can be available for non-slip cover, suitable for vertical installations. The item number please specify for example,

Item no. : MD-2→MQ-2, KD-5.5→KQ-5.5, HD-8→HQ-8 Non-slip cover for the size less than 20mm width or bigger than 125mm is available upon request.


\*Item number with suffix-V for upper score line allows finger removal without tool during the installation when a greater opening is required. For example: MDV-2L

Item No. SLOT			WxH	Length
8mm	6mm	4mm	mm	
MD-0.5L		HD-0.5L	15 X 25	
MD-0.7L		HD-0.7L	20 X 20	
MD-0L		HD-0L	25 X 25	
MD-1L	KD-1L	HD-1L	25 X 45	
MD-1.1L		HD-1.1L	30 X 30	
MD-1.2L	KD-1.2L	HD-1.2L	33 X 33	
MD-1.5L	KD-1.5L	HD-1.5L	33 X 45	
MD-2L	KD-2L	HD-2L	45 X 45	
MD-2.2L		HD-2.2L	50 X 50	
MD-2.5L	KD-2.5L	HD-2.5L	65 X 45	
MD-3L	KD-3L	HD-3L	33 X 65	
MD-4L	KD-4L	HD-4L	25 X 65	
MD-5L	KD-5L	HD-5L	45 X 65	
MD-5.5L	KD-5.5L	HD-5.5L	60 X 60	
MD-5.7L	KD-5.7L	HD-5.7L	65 X 65	
MD-6L			72 X 64	
MD-6.5L		HD-6.5L	33 X 100	2M
MD-6.6L			37.5 X 100	
MD-6.7L	KD-6.7L	HD-6.7L	48 X 100	
MD-6.8L			55 X 100	
MD-6.9L			75 X 75	
MD-7L			70 X 100	
MD-7.1L			75 X 100	
MD-7.2L			100 X 50	
MD-7.5L			100 X 75	
MD-8L	KD-8L	HD-8L	100 X 100	
MD-9L			120 X 75	
MD-10L			150 X 75	
MD-12L			150 X 100	
MD-15L			200 X 100	
MD-21L			200 X 150	
MD-22L			200 X 200	
MD 201			200 1/ 100	



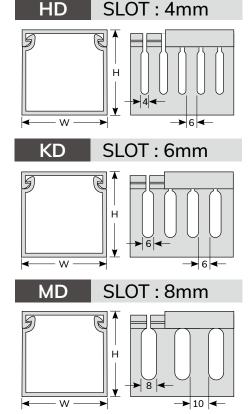

FIXING SLOT For width: 25mm, 33mm, 40mm, 45mm, 50mm, 60mm



MD-30L

300 X 100