Code of Conduct:

I _Anushka S_(192511198)_(Name / Reg No) certify that this submission is my original work and that

I have adhered to the guidelines specified for this assessment.

I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the student:


Anushka S – 192511198


RUBRICS FOR CALCULATION

Criteria	Weightage	Level 4 – Exemplary (5 Marks)	Level 3 – Proficient (4 Marks)	Level 2 – Developing (2–3 Marks)	Level 1 – Beginning (0–1 Mark)
Conceptual Understanding	**30**	Demonstrates clear and complete understanding of the concept	Good understanding with minor gaps	Basic understanding with some misconceptions	Poor or incorrect understanding
Accuracy of Answer	**25**	Completely correct answer with no errors	Mostly correct with minor errors	Partially correct with noticeable errors	Incorrect or irrelevant answer
Application of Knowledge	**20**	Correctly applies concepts to solve the question/problem	Applies concepts with minor mistakes	Limited or partially correct application	No or incorrect application
Completeness of Response	**15**	Covers all required parts of the question	Covers most parts with minor omissions	Covers only some parts	Incomplete or missing response
Clarity & Presentation	**10**	Clear, concise, and well-organized answer	Understandable with minor issues	Somewhat unclear or poorly structured	Difficult to understand


1.Design a Non-Deterministic Finite Automaton (NBA) for an Automatic Door

System based on sensor inputs.An automatic door system can be modeled using an NBA to represent different states and transitions. The system consists of four states: Closed, Opening, Open, and Closing. The input symbols are P (Person detected) and N (No person detected). Initially, the door is in the Closed state. When a person is detected (P), the system may non-deterministically transition from Closed to Opening. Once opened, the system moves to the Open state. If no person is detected (N), the door transitions to Closing and eventually returns to the Closed state. Non-determinism occurs when the system may remain in the Open state even if a persois detected or may start closing if no detection occurs.

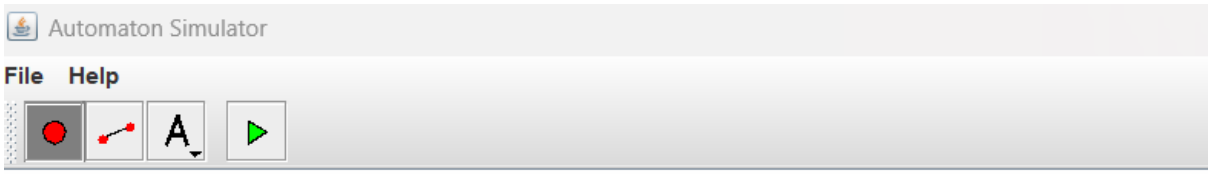

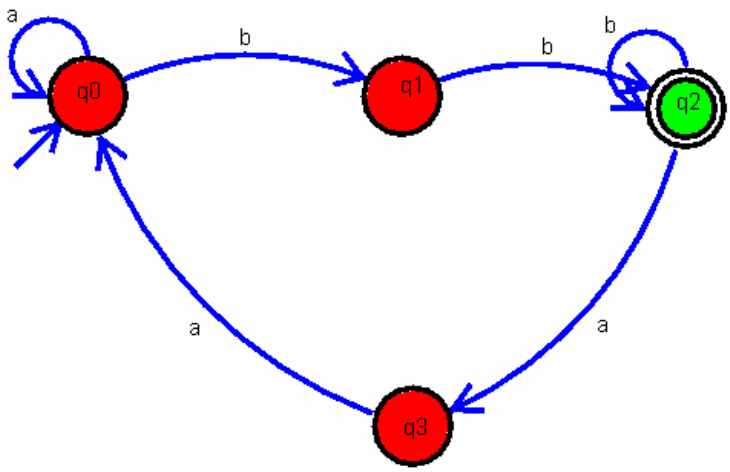


2. Design a finite automaton to model a traffic light control system at a road intersection. The automaton should represent different states corresponding to the traffic lights, such as Red, Green, and Yellow. Define the transitions between these states based on a timer or control signals, ensuring that the sequence follows the standard order (Red → Green → Yellow → Red). Include considerations for timing constraints, such as how long each light remains active, and describe how the automaton handles continuous cycling of signals. Additionally, explain how this model can be extended to handle pedestrian crossing signals or emergency vehicle overrides, ensuring safe and efficient traffic flow.

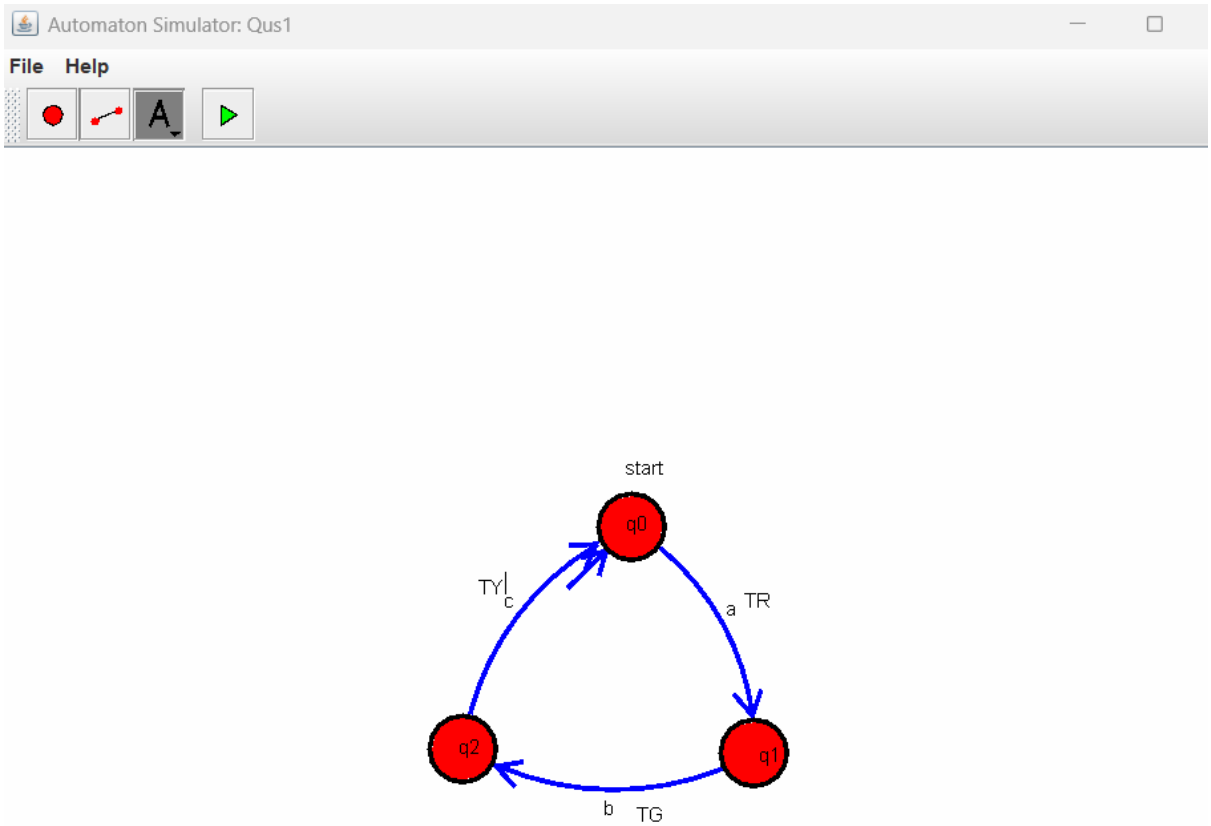


3.Design DFA using simulator to accept the string the end with ab over set {a,b)


W= aaabab

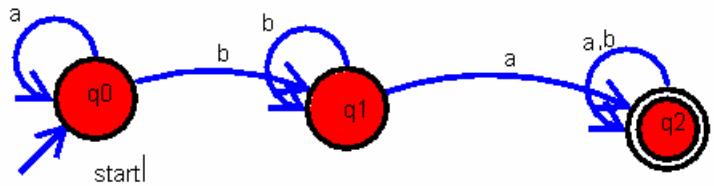

4. Design a Deterministic Finite Automaton (DFA) using a simulator to accept only the input strings “c”, “bc”, and “bcaaa” over the alphabet {a, b, c}. The automaton should begin from an initial state and transition through intermediate states based on the sequence of input symbols, ensuring that each valid string follows a unique path. For example, the string “c” should be accepted directly from the start state, while “bc” should pass through states representing “b” and then “c”. Similarly, “bcaaa” should be processed through a sequence of states that track each additional “a” after “bc”. Any deviation from these exact patterns should lead to a dead state, ensuring that no other strings are accepted. Clearly define the states, transition functions, start state, and accepting states, and implement the DFA in a simulator such as Autosim to verify its correctness. give the ans: state diagram as an image

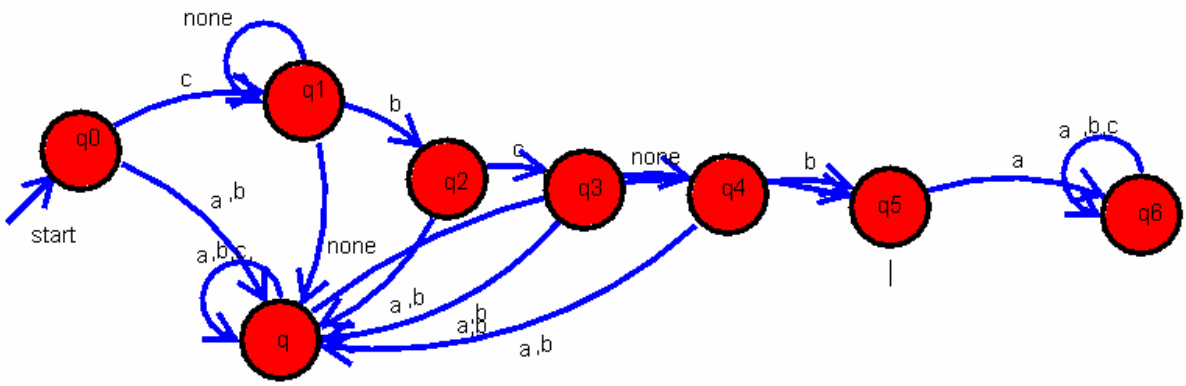

5. Design a Deterministic Finite Automaton (DFA) using a simulator to accept all strings over the alphabet {a, b} that begin with either “a” or “b”. The automaton should start in an initial state and immediately transition to an accepting state upon reading the first input symbol, since any valid string must start with either “a” or “b”. After the first symbol is processed, the DFA should remain in an accepting state regardless of the subsequent sequence of “a” and “b”, thereby allowing any combination of characters to follow. Additionally, include a dead state to handle invalid or empty inputs if required by the simulator. Clearly define the states, transition rules, start state, and accepting states, and verify the design using a simulator such as Autosim to ensure that all valid strings are accepted and invalid ones are rejected.

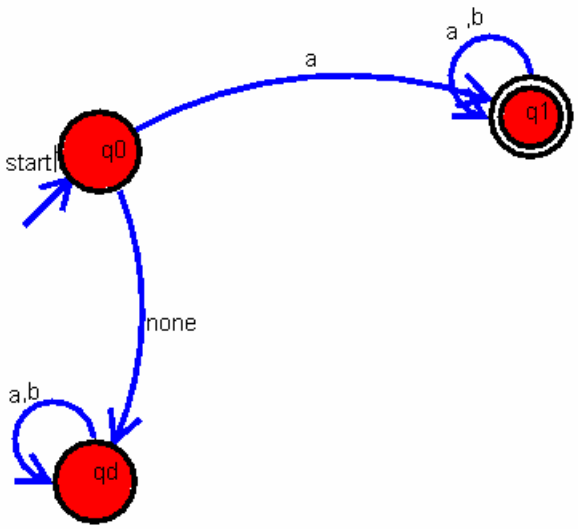
a ,b
a
q1
start
q0
none
a,b
qd