



AOS-CX 10.18.xxxx Quality of Service Guide (5420, 6200, 6300, 6400 Switch Series)

AOS-CX 10.18.xxxx Quality of Service Guide (5420, 6200, 6300, 6400 Switch Series)

Published: May 2026

© Copyright 2026 – Hewlett Packard Enterprise Development LP

Notices

The information provided here is subject to change without notice. Hewlett Packard Enterprise's products and services are covered only by the express warranty statements that come with them. This document does not constitute an additional warranty. Hewlett Packard Enterprise is not responsible for any technical or editorial errors or omissions in this document.

Confidential computer software. You must have a valid license from Hewlett Packard Enterprise to possess, use, or copy the software. In accordance with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under the vendor's standard commercial license.

Links to third-party websites will take you outside of the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for the information outside the Hewlett Packard Enterprise website.

Open source code

This product includes code licensed under certain open source licenses which require source compliance. The corresponding source for these components is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, please check if the code is available in the HPE Software Center at <https://myenterpriselicense.hpe.com/cwp-ui/software> but, if not, send a written request for specific software version and product for which you want the open source code. Along with the request, please send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company

Attn: General Counsel

WW Corporate Headquarters

1701 E Mossy Oaks Rd, Spring, TX 77389

United States of America.



Legal disclaimer

The resource assets in this document may include abbreviated and/or legacy terminology for products. See [**www.arubanetworks.com**](http://www.arubanetworks.com) for current and complete product lines and names.

Table of contents

About this document.....	7
Applicable products.....	7
Latest version available online.....	7
Command syntax notation conventions.....	7
About the examples.....	9
Identifying switch ports and interfaces.....	9
Identifying modular switch components.....	10
QoS overview.....	11
End-to-end QoS behavior.....	11
Best effort service.....	11
Class of Service.....	12
Differentiated services.....	12
QoS on the switch.....	14
QoS trust.....	16
Dynamic QoS trust mode.....	17
Port rate limiting.....	18
Queue profiles.....	18
Schedule profiles.....	20
Egress queue shaping.....	22
Egress port shaping.....	22
Active Queue Management.....	22
Explicit Congestion Notification (ECN).....	23
Weighted Random Early Detection (WRED).....	23
Threshold profiles.....	23
Queue Monitoring.....	24
Virtual Output Queues on 5420, 6200 and 6300 switch series.....	24
Virtual Output Queues on 6400 switch series.....	25
Terms.....	26
QoS configuration.....	27
Configuring QoS	27
Configuring expedited forwarding for VoIP traffic.....	32
Configuring rate limiting.....	34
Configuring egress queue shaping.....	35
Configuring egress port shaping.....	36

Configuring threshold profiles.....	38
Supporting Ethernet 802.1D Class of Service.....	39
Monitoring queue operation.....	41
QoS commands.....	41
clear queue-monitor interface	42
dwrr queue	44
map queue	46
min-bandwidth	47
name queue	50
qos cos-map	51
qos cos	53
qos dscp-map	54
qos dscp	57
qos egress-rewrite	59
qos egress-rewrite-map	61
qos queue-profile	63
qos schedule-profile	64
qos shape	67
qos trust	68
qos tunnel	71
queue action	73
queue-monitor	76
rate-limit	77
show interface qos	80
show interface queues	85
show interface queue-monitor	87
show interface queue-monitor status	102
show qos cos-map	105
show qos dscp-map	107
show qos queue-profile	109
show qos schedule-profile	111
show qos trust	113
show qos tunnel	115
show queue-monitor status	116
strict queue	117
Feature and Proactive Troubleshooting.....	119
troubleshoot qos	120
Support and Other Resources.....	122

Accessing HPE Aruba Networking Support.....	122
Accessing Updates.....	123
Warranty Information.....	124
Regulatory Information.....	124
Documentation Feedback.....	124

About this document

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing HPE Aruba Networking switches on a network.

Subtopics

Applicable products

Latest version available online

Command syntax notation conventions

About the examples

Identifying switch ports and interfaces

Identifying modular switch components

Applicable products

This document applies to the following products:

- HPE Aruba Networking 5420 Switch Series (S0U67A, S0U55A, S0U63A, S0U64A, S0U65A, S0U75A, S0U72A, S0U78A, S0U58A, S0U73A, S0U74A, S0U71A, S0U76A, S0U70A, S0U77A, S0U60A, S0U61A, S0U62A, S0U66A, S0U68A)
- HPE Aruba Networking 6200 Switch Series (JL724A, JL725A, JL726A, JL727A, JL728A, R8Q67A, R8Q68A, R8Q69A, R8Q70A, R8Q71A, R8V08A, R8V09A, R8V10A, R8V11A, R8V12A, R8Q72A, JL724B, JL725B, JL726B, JL727B, JL728B, S0M81A, S0M82A, S0M83A, S0M84A, S0M85A, S0M86A, S0M87A, S0M88A, S0M89A, S0M90A, S0G13A, S0G14A, S0G15A, S0G16A, S0G17A)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in [Support and Other Resources](#).

Command syntax notation conventions

Convention

Usage

example - text	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example - text	In code and screen examples, indicates text entered by a user.
Any of the following: • <example - text> • <example - text> • example - text • example - text	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: • For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. • For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.
{ }	Braces. Indicates that at least one of the enclosed items is required.
[]	Brackets. Indicates that the enclosed item or items are optional.
... or ...	Ellipsis: • In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. • In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment.

The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term **switch**, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch (CONTEXT-NAME) #
```

Indicates the configuration context for a feature. For example:

```
switch (config-if) #
```

Identifies the **interface** context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch (config-vlan-100) #
```

When referring to this context, this document uses the syntax:

```
switch (config-vlan-<VLAN-ID>) #
```

Where <VLAN-ID> is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format: **member/slot/port**.

On the HPE Aruba Networking 6200 Switch Series

- member: Member number of the switch in a Virtual Switching Framework (VSF) stack. Range: 1 to 8. The primary switch is always member 1. If the switch is not a member of a VSF stack, then member is 1.

- slot: Always 1. This is not a modular switch, so there are no slots.
- port: Physical number of a port on the switch.

For example, the logical interface **1/1/4** in software is associated with physical port 4 in slot 1 on member 1.

On the HPE Aruba Networking 6400 and 5420 Switch Series

- member: Always 1. VSF is not supported on this switch.
- slot: Specifies physical location of a module in the switch chassis.
 - Management modules are on the front of the switch in slots 1/1 and 1/2.
 - Line modules are on the front of the switch starting in slot 1/3.
- port: Physical number of a port on a line module.

For example, the logical interface **1/3/4** in software is associated with physical port 4 in slot 3 on member 1.

Identifying modular switch components

- Power supplies are on the front of the switch behind the bezel above the management modules. Power supplies are labeled in software in the format: member/power supply:
 - member: 1.
 - power supply: 1 to 4.
- Fans are on the rear of the switch and are labeled in software as: member/tray/fan:
 - member: 1.
 - tray: 1 to 4.
 - fan: 1 to 4.
- Fabric modules are not labeled on the switch but are labeled in software in the format: member/module:
 - member: 1.
 - member: 1 or 2.
- The display module on the rear of the switch is not labeled with a member or slot number.

QoS overview

Quality of Service (QoS) enables network administrators to customize how different types of traffic are serviced on a network, taking into account the unique characteristics of each traffic type and its importance within an organization's infrastructure. QoS ensures uniform and efficient traffic handling, keeping the most important traffic moving at an acceptable speed, regardless of current bandwidth usage. It also provides methods for administrators to control the priority settings of inbound traffic arriving at each network device.

Subtopics

End-to-end QoS behavior

QoS on the switch

End-to-end QoS behavior

The QoS settings on each network device must be aligned to achieve the desired end-to-end QoS behavior for a network. Three service types can be used to categorize and prioritize network traffic:

- Best Effort Service
- Ethernet Class of Service (CoS)
- Internet Differentiated Services (DiffServ)

For a network as a whole, it is best to select one service type to use as the primary end-to-end behavior, and then use the other two service types as needed.

Subtopics

Best effort service

Class of Service

Differentiated services

Best effort service

This is the simplest service type. All traffic is treated equally in a first-come, first-served manner. If the traffic load is low in relation to the capacity of the network links, then there is no need for the administrative complexity and costs of maintaining a more complex end-to-end policy. This is sometimes called over-provisioning, as all link speeds are much higher than peak loads on the network.


Class of Service

Class of Service (CoS) is a method for classifying network traffic at layer 2 by marking 802.1Q VLAN Ethernet frames with one of eight service classes.

CoS	Traffic type	Example protocols
7	Network Control	STP, PVST
6	Internetwork Control	BGP, OSPF, PIM
5	Voice (<10ms latency)	VoIP(UDP)
4	Video (<100ms latency)	RTP
3	Critical Applications	SQL RPC, SNMP
2	Excellent Effort	NFS, SMB
0	Best Effort	HTTP, TELNET
1	Background	SMTP, IMAP

CoS 1 is deliberately set as the lowest CoS. This enables a traffic service level below the default (best effort) traffic level to be specified.

The 3-bit Priority Code Point (PCP) field within the 16-bit Ethernet VLAN tag is used to mark the CoS.

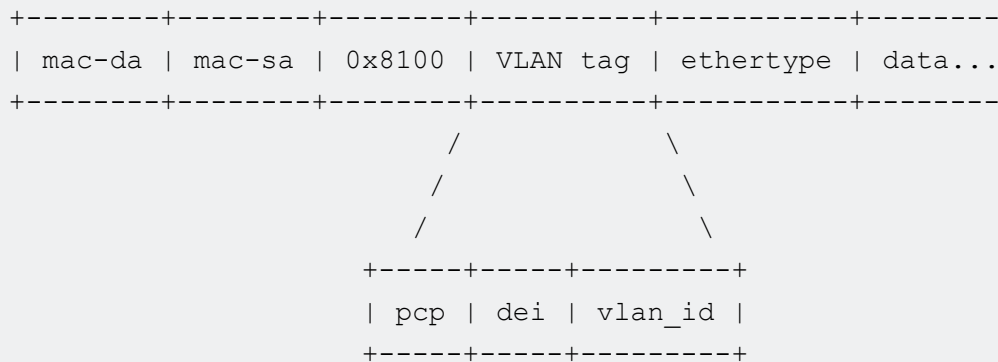

Differentiated services

Differentiated services (DiffServ) is a method for classifying network traffic at layer 3 by marking packets with one of 64 different service classes. Services classes are identified by the Differentiated services Code Point (DSCP) value. Some common DSCP values are:

DSCP	Name	Service class	RFC
48	CS6	Network Control	2474
46	EF	Telephony	3246
40	CS5	Signaling	2474
34, 36, 38	AF41, AF42, AF43	Multimedia Conferencing	2597
32	CS4	Real - Time Interactive	2474
26, 28, 30	AF31, AF32, AF33	Multimedia Streaming	2597
24	CS3	Broadcast Video	2474
18, 20, 22	AF21, AF22, AF23	Low - Latency Data	2597
16	CS2	OAM	2474
00	CS0,BE,DF	Best Effort	2474
10, 12, 14	AF11, AF12, AF13	Bulk Data	2597
08	CS1	Low - Priority Data	3662

DSCP CS1 (08) CoS 1 is deliberately set as the lowest priority. This enables a traffic service level below the standard (best effort or default forwarding) level to be specified.

The DSCP value is carried within the IPv4 DSCP field or the upper 6-bits of the 8-bit IPv6 Traffic Class (TC) field.

```

IPv4
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| ver | dscp | ecn | len | id | offset | ttl | proto | chksum | ip-sa | ip-da | data..
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
      +-----+-----+
      | dscp | ecn |
      +-----+-----+
      \         /
      \         /
IPv6  \         /
+-----+-----+-----+-----+-----+-----+-----+-----+
+-----+
| ver | tc  | len | label | next_header
| hop_limit | ip-sa | ip-da | data...


```


NOTE

Ingress	Prioritization	Classification	Queueing	Transmission
Packets arrive at switch interface (port).	An initial local-priority value is assigned to the packet based on VLAN CoS or IP DSCP.	Packets local-priority and code points can be remarked, and rates policed, based on many packet header fields. (see ACL & Policy Guide)	Packets are queued based on the destination interface and local-priority of the packet.	A scheduler defines the order in which packets are selected from queues to be transmitted from the interface.
rate-limit Rate limiting can control ingress flow by packet type: broadcast, multicast, unknown-unicast, or ICMP.	qos trust {cos dscp none} Assigns which packet values are used to determine initial local-priority either globally for all interfaces, or to specific interface(s). qos cos-map Defines how CoS values are mapped to local-priority values. qos dscp-map Defines how IP DSCP values are mapped to local-priority values. qos cos Remarks egress CoS value. qos dscp Remarks egress DSCP value.	class {ip ipv6 mac} NAME match TERMS [count] ignore TERMS [count] Creates an ordered list of rules to identify packets to match the class. policy NAME class NAME ACTIONS Creates an ordered list of classes to which traffic is evaluated, and the actions to be taken on matching packets: remarking, policing etc apply policy NAME Assigns the policy to evaluate all traffic inbound or outbound globally, or on specific interfaces or VLANs.	qos queue-profile Creates a profile that defines transmit queues. map queue Assigns a local-priority to a queue. Packets with a matching local-priority are placed in the queue. name queue Assigns a name to a queue. apply qos Assigns queue, schedule, or threshold profiles globally to all interfaces, or schedule or threshold profiles to a specific interface(s).	qos schedule-profile Creates a profile that defines the order in which packets are selected from the queues for transmission. strict queue Assigns the strict priority algorithm, with optional max-bandwidth, to a queue. dwrr queue Assigns the weighted DWRR algorithm to a queue. qos shape Assigns the maximum rate for traffic to be transmitted by the interface.

Ingress	Prioritization	Classification	Queueing	Transmission
Packets arrive at switch interface (port).	An initial local-priority value is assigned to the packet based on VLAN CoS or IP DSCP.	Packets local-priority and code points can be remarked, and rates policed, based on many packet header fields. (see <i>ACL & Policy Guide</i>)	Packets are queued based on the destination interface and local-priority of the packet.	A scheduler defines the order in which packets are selected from queues to be transmitted from the interface.
	show int IFNAME qos Displays all the QoS settings configured on an interface: • Profiles • Rate-limits • CoS or DSCP remarks • Egress shape • Trust show qos cos-map Displays the contents of the CoS Map table. show qos dscp-map Displays the content of the DSCP Map table. show qos trust Display the current default trust mode.	show class {ip ipv6 mac} Displays the ordered list of the match and ignore statements in the class. show policy Displays the order list of classes in the policy. show policy hitcounts Displays the ordered list of classes in the policy. For each class the number of times that each match or ignore statement in the class matched a packet.	show int IFNAME queues Displays the per-queue counts of packets transmitted, packets dropped, and bytes transmitted. show qos queue-profile Displays the definition of queue profiles.	show qos schedule-profile Displays the definition of schedule profiles.

The following diagram shows how different packets might traverse a switch. It also shows how QoS configuration settings apply at each stage.

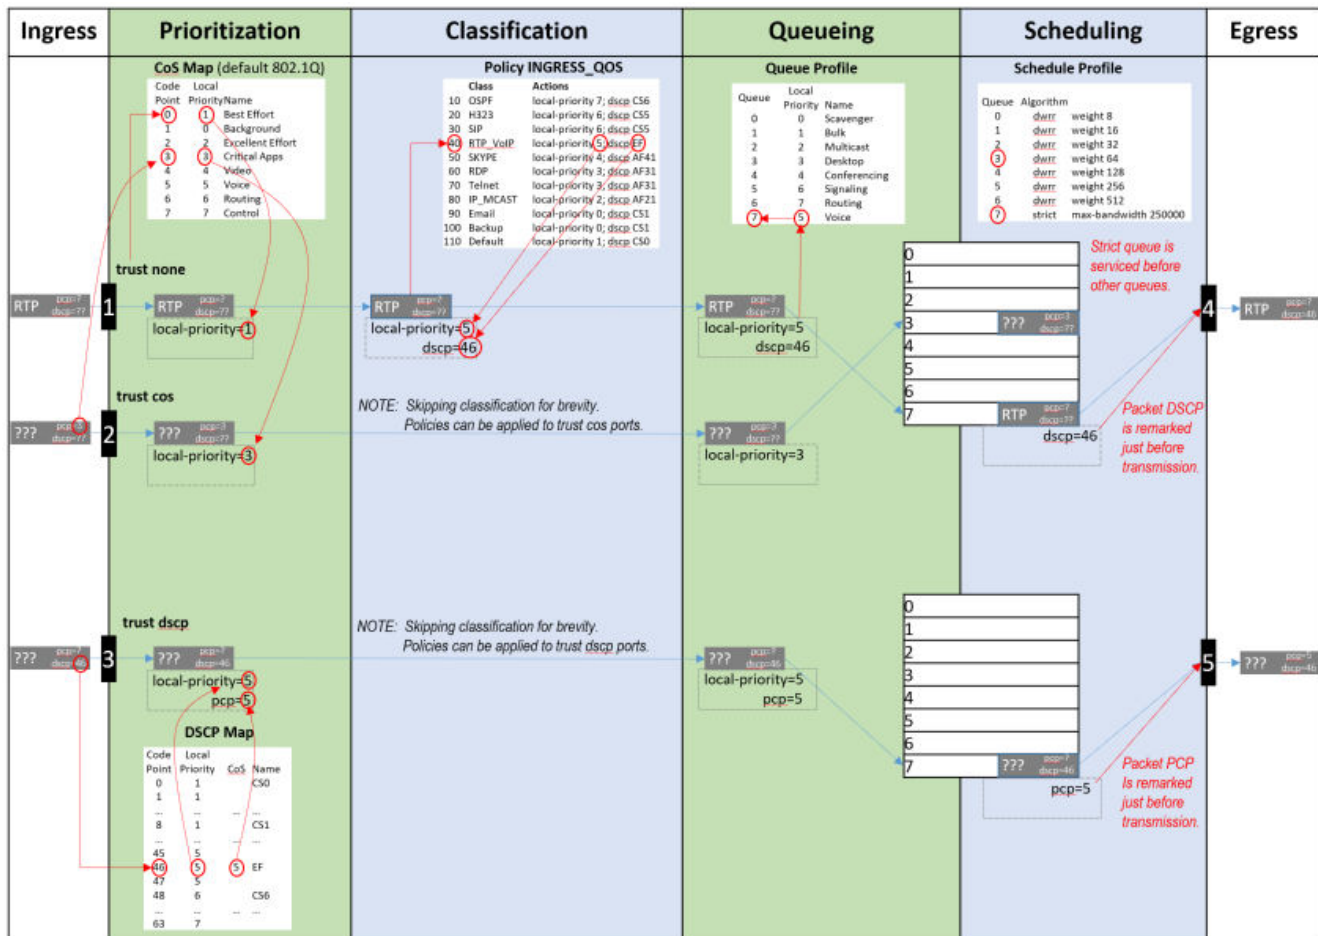

Subtopics

QoS trust

Port rate limiting

Queue profiles

Schedule profiles

Egress queue shaping

Egress port shaping

Active Queue Management

Queue Monitoring

Virtual Output Queues on 5420, 6200 and 6300 switch series


Virtual Output Queues on 6400 switch series

Terms

QoS trust

When trust mode is set to CoS or DSCP, the switch translates the QoS settings in VLAN tags (for CoS), or the DS field in an IP header (for DSCP), to local priority values on the switch. Translation is controlled by the CoS map or DSCP map tables.

For example:

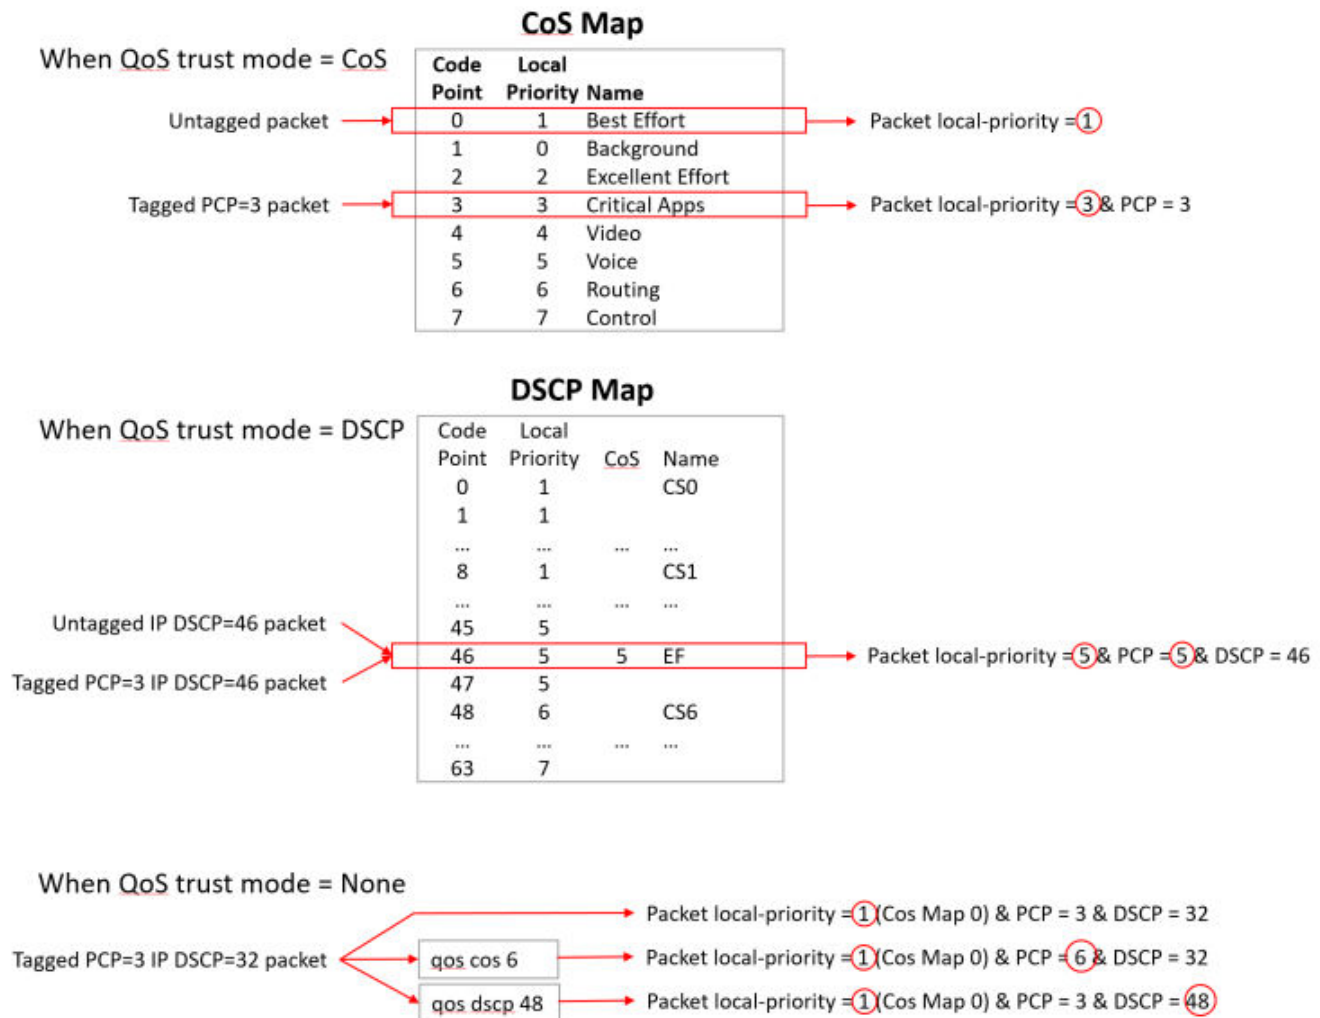

Subtopics

Dynamic QoS trust mode

Dynamic QoS trust mode

The device profile feature can dynamically set the QoS trust mode on an interface based on the LLDP information exchanged with a link partner. The device profile's trust mode temporarily overrides the static trust mode configured for an interface. The override remains in place as long as that link partner is connected and its link state is **up**. Use command `show interface IFNAME qos` to view the current QoS trust mode for an interface.

Port rate limiting

Port rate limiting helps control undesirable traffic. Its purpose is to allow enough unicast, broadcast, multicast, and ICMP traffic for the network to function properly, while preventing flooding and traffic storms.

Some amount of each traffic type is required for normal network operation. For example, broadcast packets may include ARP and DHCP traffic. Video streams and certain types of network protocol packets are multicast traffic. Unknown-unicast packets may be intended for devices whose addresses have temporarily aged out of network forwarding caches. Configuring rate limits can help provide balance between necessary and flooded traffic.

The amount of permitted traffic (the rate limit) can be specified in kilobits-per second (kbps), packets-per-second (pps), or as a percentage of link bandwidth (percent).

Please note that rate limits are enforced separately on each individual member of a LAG, not on the LAG as a whole. When limits are configured in kilobits-per-second (kbps) or packets-per-second (pps), larger limits may be needed on high speed ports to allow normal network functionality. A limit of 100 packets-per-second might be reasonable on a 1 Gigabit port, but it would be too restrictive on a port that is 10 Gigabits or faster. Conversely, limits configured as a percentage of link bandwidth may not be useful on high speed ports. A limit of 1 percent might be reasonable on a 1 Gigabit port, but too lax on a port that is 10 Gigabits or faster.

A rate limit for multicast traffic will affect both multicast and broadcast traffic whereas a rate limit for broadcast traffic only impacts broadcast traffic. In the case where both types are applied to the same port, broadcast packets will be limited to the lower of the two configured rate values.

Rate limits configured on LAG interfaces with no assigned or linked-up member ports may be displayed as "not applied". This behavior may also be seen with percentage-based rate limits on regular ports when link up has not yet occurred (i.e., when the port speed is not known).

Queue profiles

A queue profile defines the queues that are associated with an interface to control the transmission of packets. Each profile supports up to eight queues, numbered 0 to 7. The larger the queue number, the higher its priority during transmission scheduling. Packets are assigned to a queue based on their local priority value (0 to 7). A queue profile must map all eight local priority values to whatever queues are being used on the switch, and a schedule profile must specify the configuration for those same queues. A queue without a local priority value assigned to it is not used to store packets.

The switch is automatically provisioned with an initial queue profile named **factory-default** which assigns each local priority to the queue of the same number. To see the default queue profile, use the command **show qos queue-profile factory-default**:

```
switch# show qos queue-profile factory-default
queue_num local_priorities name
-----
0          0                Scavenger_and_backup_data
1          1
2          2
```

```

3      3
4      4
5      5
6      6
7      7

switch# show qos queue-profile factory-default
queue_num cos      name
-----
0      1      Scavenger_and_backup_data
1      0
2      2
3      3
4      4
5      5
6      6
7      7

```

More than one local priority value can be assigned to the same queue. For example,

Local Priority	Queue
0	0
1	1
2	2
3	3
4	4
5	5
6	5
7	5

Queues must be consecutively defined starting at queue number zero. For example, a four-queue profile with priority values defined for queues 0, 1, 2, 3 is valid, but a four-queue profile which defines priority values for queues 1, 3, 5, and 7 is not.

Table 1. Valid queue

Local Priority	Queue
0	0

Local Priority	Queue
1	1
2	1
3	1
4	2
5	2
6	3
7	3

The commonly used commands for working with QoS queues are as follows:

- **qos queue-profile:** Creates an empty queue-profile and enters the profile configuration context.
- **name queue:** Assigns a descriptive name to a queue.
- **map queue:** Assigns a local-priority to a queue.
- **apply qos queue-profile:** Applies a queue-profile globally to all interfaces.

Schedule profiles

A schedule profile determines the order in which queues are selected for transmission, and the amount of service available for each queue. A schedule profile must be configured on every interface at all times. A schedule profile can be applied globally to all interfaces, or only to specific interfaces.

- All queues use weighted fair queuing (WFQ)
- All queues use strict priority
- The highest priority queue uses strict priority, and all other queues use WFQ
- All queues use deficit weighted round robin queuing (DWRR)
- All queues use strict priority
- The highest priority queue uses strict priority, and all other queues use DWRR
- All queues use guaranteed minimum bandwidth
- The highest priority queue uses strict priority and all other queues use guaranteed minimum bandwidth

A weighted schedule profile assigns relative servicing for each queue. The amount of service per weight is relative to the underlying hardware implementation, and to the weights assigned to the other non-empty queues. Strict scheduling can be used to service queues purely on the basis of highest priority first (at the risk of starving lower-priority queues during high stress periods). A combination of strict and weighted scheduling offers more service to the highest priority queue when needed, while preserving scheduling between the remaining queues, thus decreasing the risk of starvation.

The switch is automatically provisioned with a schedule profile named **factory-default**, which assigns DWRR to all queues with a weight of 1. Use the command `show schedule-profile factory-default` to view the default schedule profile. (Do not use `show running-configuration`, as it only displays changes from the initial settings.) The 6400 Switch Series only has four queues.

```
switch# show qos schedule-profile default
```

```
queue_num algorithm weight
```

```
-----
```

0	wfq	1
1	wfq	1
2	wfq	1
3	wfq	1
4	wfq	1
5	wfq	1
6	wfq	1
7	wfq	1

```
switch# show qos schedule-profile default
```

```
queue_num algorithm weight
```

```
-----
```

0	dwrr	1
1	dwrr	1
2	dwrr	1
3	dwrr	1
4	dwrr	1
5	dwrr	1
6	dwrr	1
7	dwrr	1

```
switch# show qos schedule-profile factory-default
```

```
queue_num algorithm weight
```

```
-----
```

0	dwrr	1
1	dwrr	1
2	dwrr	1
3	dwrr	1
4	dwrr	1
5	dwrr	1
6	dwrr	1
7	dwrr	1

```

switch# show qos schedule-profile
profile_status profile_name
-----
applied        factory-default
complete       strict
switch# show qos schedule-profile factory-default
queue_num algorithm      percent max-bandwidth_kbps
-----
0              min-bandwidth 2
1              min-bandwidth 3
2              min-bandwidth 30
3              min-bandwidth 10
4              min-bandwidth 10
5              min-bandwidth 10
6              min-bandwidth 15
7              min-bandwidth 20

```

Egress queue shaping

Egress queue shaping limits the amount of traffic transmitted per strict output and guaranteed minimum bandwidth queues. The buffer associated with each egress queue stores excess traffic to absorb bursts and smooths the output rate. For example, an administrator might limit strict-priority or min-bandwidth queue traffic to prevent low-priority queue starvation in the event that a device inappropriately sends too many higher-priority packets.

Egress queue shaping can be configured on an Ethernet port or on a link aggregation group (LAG). To configure egress queue shaping, define a schedule profile with the strict priority algorithm assigned to each queue.

Egress port shaping

Egress port shaping limits the amount of aggregate traffic transmitted through a port. To be effective, the egress port-shaping rate must be less than the port's line rate. By default, the egress port-shaping rate is the same as the line-rate of the port. Buffers associated with each port store excess traffic. When both egress port-shaping and egress queue-shaping are configured on the same interface, the switch respects the minimum of both configurations.

Active Queue Management

The following features support active queue management.

Subtopics

Explicit Congestion Notification (ECN)

Weighted Random Early Detection (WRED)

Threshold profiles

Explicit Congestion Notification (ECN)

Explicit Congestion Notification (ECN) provides a mechanism for two end-points to exchange end-to-end notification of network congestion. ECN uses a 2-bit field in the IP header to indicate that the traffic load on network equipment in the path between an ECN-capable sender and receiver is causing packets to be buffered, as defined by IETF RFC 3168 (<https://tools.ietf.org/html/rfc3168>).

Weighted Random Early Detection (WRED)

WRED operates by random early-dropping packets, which can be helpful in signaling data path congestion to certain protocols. Protocols that respond to these drops slow their transmit rate in an effort to reduce network congestion. WRED drops are randomized in order to avoid potential synchronization between multiple streams using the same link. If drops occurred on all streams at the same time, multiple senders might respond by reducing their transmit rates and then increasing. Such synchronized behavior causes link utilization to fluctuate between high and low, wasting bandwidth. Random dropping ensures that only some streams detect drops, and that they detect them at different times. This results in better link utilization, as some senders continue to transmit at a higher rate while others reduce and ramp up again.

Threshold profiles

Threshold profiles configure individual queue utilization thresholds as triggers for taking action (i.e., ECN marking or WRED dropping) on a packet. A threshold profile is applied per-port and defines the thresholds and actions for each queue. Omitting configuration for a queue in a threshold profile means that queue will not be configured with a threshold value or action.

In an environment where responsive transport protocols are in use and congestion management features are required to reduce latency, ECN can be configured on queues carrying delay-sensitive traffic. The result is that queue utilization is actively managed, resulting in ECT packets being CE marked when queue utilization reaches or exceeds a configured threshold.

Queue Monitoring

The queue monitoring feature allows the switch to collect queue statistics at specific time intervals, then display this information as a queue statistics history. These aggregate statistics can be used to monitor network health, troubleshoot network issues, and identify normal network behavior patterns and performance anomalies. This feature is disabled by default, but can be enabled on a maximum of 52 interfaces per switch. For more information on enabling this feature, see .

Queue statistics history data can be displayed in the command-line interface as a list or a histogram reflecting the last eight hours of queue statistics history, or as a table showing the previous five minutes of queue statistics history.

As performance anomalies are identified, the interface queue experiencing the anomaly can further analyzed to identify the cause of the behavior. For example, traffic patterns for flows competing for network bandwidth can be examined to determine if corrective action is needed to address potential problems.

The queue depth of an interface changes constantly based on the arrival rate of packets destined to egress a given queue (the queue fill rate) and the rate at which that queue is able to transmit packets (the queue drain rate).

If no queue depth is specified, the output of the **show interface queue-monitor** command displays statistics for queues with a minimum depth of one kbyte, which includes all queues which have reached a depth greater than zero.

Virtual Output Queues on 5420, 6200 and 6300 switch series

The 6200 and 6300v1 Switch Series contain 8 MB of packet buffer memory. Approximately 5 MB are used for buffering traffic arriving on network ports. Each port can buffer at most 1 MB of packets divided equally across all the active queues in a queue profile. For example, using the default eight-queue profile, each virtual output queue (VOQ) can buffer a maximum of 128 KB of packets.



NOTE

The 6300v1 Switch Series includes the following SKUs: JL658A, JL659A, JL660A, JL661A, JL662A, JL663A, JL664A, JL665A, JL666A, JL667A, JL668A, JL762A.

The 5420 Switch Series contain 64 megabytes of packet-buffer memory. Appropriately 60 megabytes are used for buffering traffic arriving on network ports. Each port queue can buffer at most 2 megabytes of packets in a queue-profile with 8 to 3 queues or 4 megabytes of packets in a queue-profile with 2 to 1 queues.

The 6300v2 Switch Series contains 16 MB of packet buffer memory. Approximately 14 MB are used for buffering traffic arriving on network ports. Each port queue can buffer at most 4 MB of packets. A single port can buffer a maximum of 4 MB of packets across all non-empty queues.

**NOTE**

The 6300v2 Switch Series includes the following SKUs: R8S89A, R8S90A, R8S91A, R8S92A.

Replicated traffic (L2 broadcasts, L2 multicasts, IP multicasts, mirrored packets, and unknown-unicasts) requires an extra step. There are eight additional replication queues initially used for replicated traffic. The switch services the replication queues strictly at the rate of 50G. For ports on the same switch, pointers to the same packet are placed in the VOQ for each destination port. For ports on remote VSF member switches, only one copy of the packet data is moved across the VSF link to the destination replication VOQ to optimize link bandwidth. From there, the destination switch puts pointers to the same packet on the VOQ for each destination port.

When 3-8 queues are configured on the 6300v1 switch series the egress buffer limit is 2 MB. The most buffer a single port can use in a given queue is 2MB and that 2 MB is shared between the ports in the queue that need it. If QoS is not needed then up 1-2 queues can be configured with an egress buffer limit of 4 MB.

**NOTE**

The 6300v1 switch series is the only platform where collapsing the number of queues increases the buffer allocation limit.

Virtual Output Queues on 6400 switch series

The 6400 Switch Series use a VOQ architecture where most packet buffering occurs on the ingress line module. Only shallow buffers are used on the egress line module. This optimizes usage of fabric bandwidth. Traffic destined for one port (unicast) uses different buffering and scheduling than traffic destined for multiple ports (replication).

Each line module contains eight VOQs for every destination port in the chassis, and eight egress physical queues (EPQs) for the ports local to the line module, regardless of the number of queues in the queue profile. The 6400 Switch Series R0X38-R0X45 line modules contain 8 MB of packet buffer memory. Approximately 5 MB is used for buffering traffic arriving on network ports. The remainder is used for buffering traffic arriving across the fabric. On each line module, at most 1 MB of buffering is available for every destination port in the chassis. This 1 MB buffer is equally divided across all the active queues in the queue profile.

For example, using the default eight-queue profile, each VOQ can buffer at most 128 KB of packets. Packets wait in VOQs on the arrival line module until the destination port scheduler selects them to be moved to one of its EPQs. If the destination port is on another line module, the packet is moved across the fabric. If the destination port EPQ is on the same line module, only a pointer to the packet is moved from the VOQ to the EPQ.

The schedule profile determines the order the destination port scheduler uses for VOQ servicing. The scheduler moves only enough packets to EPQs as are needed to keep the destination port transmitting at the configured rate.

Replicated traffic (L2 broadcasts, L2 multicasts, IP multicasts, mirrored packets, and unknown-unicasts) requires an extra step. There are eight additional internal replication VOQs per line module initially used for replicated traffic. The line module services these replication VOQs strictly at a rate of 100 G. For ports on the same line module, pointers to the same packet are placed in the VOQ for each destination port. For ports on remote line modules, only one copy of the packet data is moved across the fabric to the destination replication VOQ, to optimize fabric bandwidth. From there, the destination line module will put pointers to the same packet on the VOQ for each destination port.

Terms

Class

For networking, a set of packets sharing a common characteristic. For example, all IPv4 packets.

Code point

The name of a packet header field, or the value carried within a packet header field:

- Example 1: Priority code point (PCP) is the name of a field in the IEEE 802.1Q VLAN tag.
- Example 2: Differentiated services code point (DSCP) is the name of a field carried within the DS field of an IP packet header.

Color

A metadata label associated with each packet within the switch. It has two values: green (0) or yellow (1). When packets encounter congestion for a resource (queue), the switch uses packet color to distinguish which packets must be dropped, and is mostly used for packets marked with Assured Forwarding (AF) DSCP values.

Not supported in this release.

Class of service (CoS)

A 3-bit value used to mark packets with one of eight classes (levels of priority). It is carried within the priority code point (PCP) field of the IEEE 802.1Q VLAN tag.

Differentiated services code point (DSCP)

A 6-bit value used to mark packets for different per-hop behavior as originally defined by IETF RFC 2474. It is carried within the differentiated services (DS) field of the IPv4 or IPv6 header.

Local priority

A meta-data label associated with a packet within the switch which is used to classify packets for different treatment (such as queue assignment). Eight local priorities are defined on the switch, numbered from 0 to 7. A queue profile must map all eight local priorities to whatever queues are in use on the switch, and a schedule profile must specify the configuration for these same queues.

Metadata

Information labels associated with each packet in the switch, separate from the packet headers and data. These labels are used by the switch in its handling of the packet. For example: arrival port, egress port, VLAN membership, and local priority.

Priority code point (PCP)

The name of a 3-bit field in the IEEE 802.1Q VLAN tag. It carries the CoS value to mark a packet with one of eight classes (priority levels).

Quality of service (QoS)

General term used when describing or measuring performance. For networking, it means how different classes of packets are treated when traversing a network or device.

Traffic class (TC)

General term for a set of packets sharing a common characteristic. It used to be the name of an 8-bit field in the IPv6 header originally defined by IETF RFC 2460. This field name was changed to differentiated services by IETF RFC 2474.

Type of service (ToS)

General term when there are different levels of treatment (fare class). It used to be the name of an 8-bit field in the IPv4 header originally defined by IETF RFC 791. This field name was changed to differentiated services by IETF RFC 2474.

QoS configuration

Learn more about QoS behaviors on the switch

Subtopics

[Configuring QoS](#)

[Configuring expedited forwarding for VoIP traffic](#)

[Configuring rate limiting](#)

[Configuring egress queue shaping](#)

[Configuring egress port shaping](#)

[Configuring threshold profiles](#)

[Supporting Ethernet 802.1D Class of Service](#)

[Monitoring queue operation](#)

Configuring QoS

Syntax

Procedure

1. Configure how local priority values are assigned to ingress packets with the commands `qos cos-map`, `qos dscp-map`, and `qos trust`.
2. Optionally, add a rate limit for ingress traffic on one or more interfaces with the command `rate-limit`.
3. If you do not want to use the default QoS queue profile to map local priority to queue, create one or more custom queue profiles with the command `qos queue-profile`. For each queue in a custom queue profile:
 - a. Assign a local priority value with the command `map queue`.
 - b. Optionally, define a descriptive name with the command `name queue`. All local priorities (0 to 7) must be mapped to a queue, and the queues selected for use must be in contiguous order starting at 0.
4. If you do not want to use the default QoS schedule profile to determine the order in which queues are selected to transmit a packet, create one or more custom schedule profiles with the command `qos schedule-profile`. For each queue in a custom schedule queue profile, define scheduling priority with the commands `strict queue` and `dwrr queue`.
5. Optionally for strict queues, configure egress queue shaping to limit egress bandwidth on an interface to a value that is less than its line rate. Use the `max-bandwidth` parameter of the `strict queue` command.
6. Activate QoS settings with the command `apply qos`. This command lets you apply a queue profile and schedule profile globally to all interfaces, or a schedule profile override to individual interfaces.
7. View QoS configuration settings with the provided `show` commands.

Examples

This example creates the following configuration:

- Configures CoS to be used to assign local priority to ingress packets.
- Modifies the default CoS map to assign CoS 1 to local priority **1**.
- Creates a queue profile named `Q1` and assigns local priorities as follows:

Queue	Local Priority
0	0
1	1
1	2
3	3
4	4
5	5
5	6
5	7

- Creates a schedule profile named **S1** and assigns WFQ to all queues in the schedule profile with the following weights:

Queue	Weight
0	5
1	10
3	15
4	25
5	50

- Creates a threshold profile named **T1** with the following limits:

Queue	Threshold
4	40 KB

Queue	Threshold
5	50 KB

- Applies **Q1** and **S1** to all interfaces that do not have a QoS override applied.

```

switch(config)# qos trust cos
switch(config)# qos cos-map 1 local-priority 1
switch(config)# qos queue-profile Q1
switch(config)# map queue 0 local-priority 0
switch(config)# map queue 1 local-priority 1
switch(config)# map queue 1 local-priority 2
switch(config)# map queue 3 local-priority 3
switch(config)# map queue 4 local-priority 4
switch(config)# map queue 5 local-priority 5
switch(config)# map queue 5 local-priority 6
switch(config)# map queue 5 local-priority 7
switch(config)# qos schedule-profile S1
switch(config-schedule)# wfq queue 0 weight 5
switch(config-schedule)# wfq queue 1 weight 10
switch(config-schedule)# wfq queue 3 weight 15
switch(config-schedule)# wfq queue 4 weight 25
switch(config-schedule)# wfq queue 5 weight 50
switch(config)# qos threshold-profile T1
switch(config-threshold)# queue 4 action ecn threshold 40 kbytes
switch(config-threshold)# queue 5 action ecn threshold 50 kbytes
switch(config-threshold)# exit
switch(config)# apply qos threshold-profile T1
switch(config)# wfq queue 5 weight 50
switch(config)# apply qos queue-profile Q1 schedule-profile S1

```

This example creates the following configuration:

- Configures CoS to be used to assign local priority to ingress packets.
- Modifies the default CoS map to assign CoS 1 to local priority **1**.
- Creates a queue profile named **Q1** and assigns local priorities as follows:

Queue	Local Priority
0	0

Queue	Local Priority
1	1
1	2
2	3
3	4
4	5
5	6
5	7

- Creates a schedule profile named **S1** and assigns DWRR to all queues in the schedule profile with the following weights:

Queue	Weight
0	5
1	10
2	15
3	20
4	25
5	50

- Applies **Q1** and **S1** to all interfaces that do not have a QoS override applied.

```
switch(config) # qos trust cos
switch(config) # qos cos-map 1 local-priority 1
switch(config) # qos queue-profile Q1
switch(config-queue) # map queue 0 local-priority 0
switch(config-queue) # map queue 1 local-priority 1
switch(config-queue) # map queue 1 local-priority 2
switch(config-queue) # map queue 2 local-priority 3
```

```

switch(config-queue)# map queue 3 local-priority 4
switch(config-queue)# map queue 4 local-priority 5
switch(config-queue)# map queue 5 local-priority 6
switch(config-queue)# map queue 5 local-priority 7
switch(config-queue)# qos schedule-profile S1
switch(config-schedule)# dwrr queue 0 weight 5
switch(config-schedule)# dwrr queue 1 weight 10
switch(config-schedule)# dwrr queue 2 weight 15
switch(config-schedule)# dwrr queue 3 weight 20
switch(config-schedule)# dwrr queue 4 weight 25
switch(config-schedule)# dwrr queue 5 weight 50
switch(config)# apply qos queue-profile Q1 schedule-profile S1

```

Queue	Minimum bandwidth (percentage)
0	5
1	5
2	10
3	10
4	20
5	20
6	10
7	20

Configuring expedited forwarding for VoIP traffic

Voice over IP (VoIP) traffic is delay and jitter sensitive. For optimum transmission of VoIP traffic, dwell time in network devices must be kept to a minimum and all network devices in the data path must have identical per-hop behaviors. To configure a dedicated queue on the switch to handle VoIP traffic with priority service before all other queues, follow these steps.

Prerequisites

This scenario assumes that VoIP packets are uniquely identified using DiffServ code point 46, Expedited Forwarding (EF).

Procedure

1. Map DSCP EF packets exclusively to local priority 5 . The default DSCP map has eight code points (40 through 47), that are mapped to local priority To reserve local priority 5 for VoIP traffic, the other code points must be reassigned. In this scenario, local priority 6 is used for all reassignments, including for code point 40, Call Signaling protocol (CS5).

```
switch(config)# qos dscp-map 40 local-priority 6 name CS5
switch(config)# qos dscp-map 41 local-priority 6
switch(config)# qos dscp-map 42 local-priority 6
switch(config)# qos dscp-map 43 local-priority 6
switch(config)# qos dscp-map 44 local-priority 6
switch(config)# qos dscp-map 45 local-priority 6
switch(config)# qos dscp-map 47 local-priority 6
```

2. Queue 7 is the highest priority queue, so for best throughput, create a queue profile that maps local priority to queue 7.

```
switch(config)# qos queue-profile ef_priority
switch(config-queue)# name queue 7 Voice_Priority_Queue
switch(config-queue)# map queue 7 local-priority 5
switch(config-queue)# map queue 6 local-priority 7
switch(config-queue)# map queue 5 local-priority 6
switch(config-queue)# map queue 4 local-priority 4
switch(config-queue)# map queue 3 local-priority 3
switch(config-queue)# map queue 2 local-priority 2
switch(config-queue)# map queue 1 local-priority 1
switch(config-queue)# map queue 0 local-priority 0
```

3. Create a schedule profile that services queue 7 using strict priority (SP), and the remaining queues with DWRR. This scenario gives all DWRR queues equal weight.

```
switch(config)# qos schedule-profile voip
switch(config-schedule)# strict queue 7
switch(config-schedule)# dwrr queue 6 weight 1
switch(config-schedule)# dwrr queue 5 weight 1
switch(config-schedule)# dwrr queue 4 weight 1
switch(config-schedule)# dwrr queue 3 weight 1
switch(config-schedule)# dwrr queue 2 weight 1
switch(config-schedule)# dwrr queue 1 weight 1
switch(config-schedule)# dwrr queue 0 weight 1
switch(config-schedule)# exit
switch(config)#
```

4. Apply the profiles to all interfaces.


```
switch(config)# apply qos queue-profile ef_priority schedule-profile voip
```

5. Configure DSCP trust mode on all ports

```
switch(config)# qos trust dscp
```

Configuring rate limiting

This scenario illustrates how to use rate limiting to manage the traffic from various devices connected to a switch. The physical topology of the network looks like this:

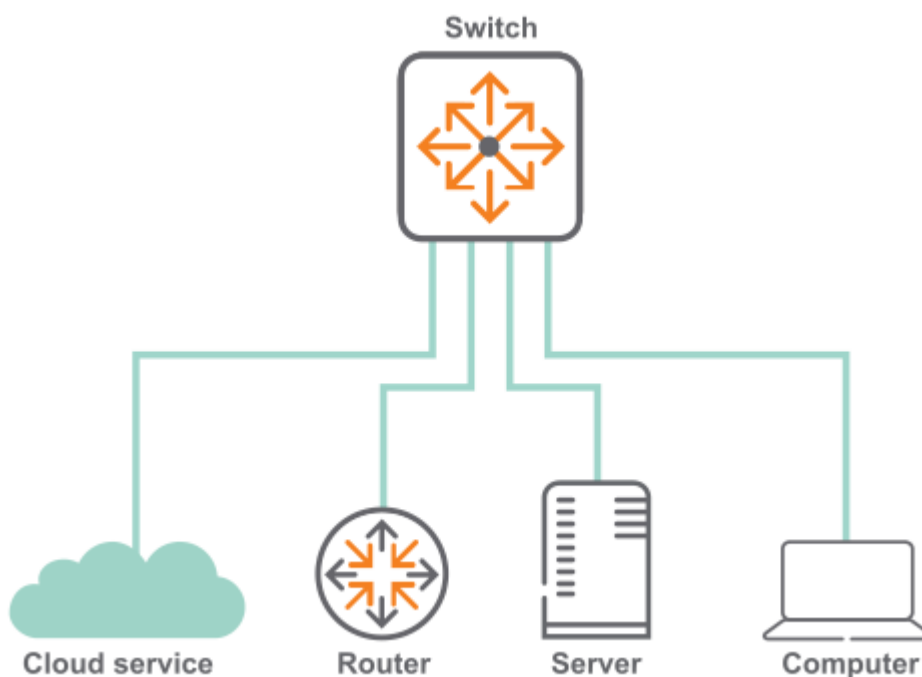

A certain amount of broadcast traffic is necessary to maintain healthy network operation, particularly from routers and across service boundaries. In this scenario, both the service cloud and the router connections limit this traffic to 1 Gbps. The server has a smaller limit, as it does not require as much network protocol traffic as the service cloud and router.

A multicast server needs to be able to stream multicast traffic to clients, so a multicast rate limit may not be helpful. A computer, however, should not be generating large amounts of multicast traffic (it may be receiving streams, but typically not sending them). In this example, the computer is configured with a multicast rate limit to prevent malicious traffic from taking up network bandwidth.

Finally, while the service cloud and router may need to send traffic for unknown unicast addresses to resolve address forwarding, the server and computer should send very little of this type of traffic. Rate limiting unknown unicast traffic on those two devices enforces that.

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Procedure

1. Configure broadcast and multicast rate limiting for the service cloud connection.

```
switch# config
switch(config)# interface 1/1/1
switch(config-if)# rate-limit broadcast 500 pps
switch(config-if)# rate-limit multicast 500 pps
switch(config-if)# exit
```

2. Configure broadcast rate limiting for the router connection.

```
switch(config-if)# interface 1/1/2
switch(config-if)# rate-limit broadcast 500 pps
switch(config-if)# exit
```

3. Configure broadcast rate limiting for the server connection.

```
switch(config-if)# interface 1/1/5
switch(config-if)# rate-limit broadcast 100 pps
switch(config-if)# exit
```

4. Configure broadcast, and multicast rate limiting for the computer connection.

```
switch(config-if)# interface 1/1/10
switch(config-if)# rate-limit broadcast 50 pps
switch(config-if)# rate-limit multicast 50 pps
```

Configuring egress queue shaping

This example shows how to apply egress queue shaping to an interface. First, a schedule profile is created that has per-queue bandwidth limits set on all queues with `strict` as the scheduling algorithm. Next, this profile is applied to an interface or LAG.

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

The following example creates a schedule profile named **EQSExample**, which services all queues using **strict** priority. This profile configures queues 1, 4, and 7 with a bandwidth limit of 10 Gbps, 20 Gbps, and 30 Gbps

respectively. The **apply qos schedule-profile** command is then used to apply the **EQSExample** profile to interface **1/1/1**. The actual bandwidth configured on an interface can be found by using the **show interface <IF-NAME> qos** command.

```
switch(config)# qos schedule-profile EQSExample
switch(config-schedule)# strict queue 0
switch(config-schedule)# strict queue 1 max-bandwidth 10000000 kbps
switch(config-schedule)# strict queue 2
switch(config-schedule)# strict queue 3
switch(config-schedule)# strict queue 4 max-bandwidth 20000000 kbps
switch(config-schedule)# strict queue 5
switch(config-schedule)# strict queue 6
switch(config-schedule)# strict queue 7 max-bandwidth 30000000 kbps
switch(config-schedule)# exit
switch(config)# interface 1/1/1
switch(config-if)# apply qos schedule-profile EQSExample
```

The following example creates a schedule profile named **EQSExample** which services all queues using **strict** priority. This profile configures queues 1, 4 and 7 with a bandwidth limit of 10%, 20%, and 30% of link bandwidth respectively. The **apply qos schedule-profile** command is then used to apply the **EQSExample** profile to the port. The actual burst and bandwidth configured on an interface can be found by using the **show interface < IF-NAME > qos** command.

```
(config)# qos schedule-profile EQSExample
(config-schedule)# strict queue 0
(config-schedule)# strict queue 1 max-bandwidth 10 percent
(config-schedule)# strict queue 2
(config-schedule)# strict queue 3
(config-schedule)# strict queue 4 max-bandwidth 20 percent
(config-schedule)# strict queue 5
(config-schedule)# strict queue 6
(config-schedule)# strict queue 7 max-bandwidth 30 percent
```

Configuring egress port shaping

This example shows how to apply egress port shaping to an interface to limit the rate of egress traffic. Egress port shaping is configured by specifying the desired bandwidth rate in kilobits per second (kbps) or

as a percentage of link bandwidth . In order to be effective, the configured rate must be less than the link rate of the port. If the configured egress port-shaping rate exceeds the port's link rate, then egress port shaping is effectively disabled. Egress port shapes are enforced separately on each individual member of a LAG, not on the LAG as a whole. Because shapes are in kilobits-per-second (kbps), larger shapes may be needed on high speed ports in order to allow normal network function. A shape of 100 kbps might be reasonable on a 1-Gigabit port, but too restrictive on a port that is 10-Gigabits or faster.

The configured egress rate on a specific interface can be found by using the **show interface** and **show interface qos** commands.

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

The following example configures an egress rate of 100 Mbps :

```
switch(config) # interface 1/1/1
switch(config-if) # qos shape 100000 kbps
```

In the next example, both egress port shaping and egress queue shaping are configured on the same interface.

The example creates a schedule profile named `EQSEExample` with strict priority for all seven queues. Queue 7 is configured with a bandwidth limit of 300 Mbps. The profile is then applied to interface `1/1/1` with egress port shaping of 400 Mbps . As egress queue shaping and egress port shaping are both configured on port `1/1/1` , egress queue shaping is subject to the lower port or queue shape rate. The effective bandwidth for the traffic egressing on queue 7 will be 300 Mbps .

```
switch(config) # qos schedule-profile EQSEExample
switch(config-schedule) # strict queue 0
switch(config-schedule) # strict queue 1
switch(config-schedule) # strict queue 2
switch(config-schedule) # strict queue 3
switch(config-schedule) # strict queue 4
switch(config-schedule) # strict queue 5
switch(config-schedule) # strict queue 6
switch(config-schedule) # strict queue 7 max-bandwidth 300000 kbps

switch(config-schedule) # exit
switch(config) # interface 1/1/1
switch(config-if) # apply qos schedule-profile EQSEExample
switch(config-if) # qos shape 400000 kbps
```

Configuring an egress port shape of 10 percent and a burst of 30 KB on port 1/1/1. The configured egress rate on a specific interface can be found by using the **show interface** and **show interface qos** commands.

```
switch(config) # interface 1/1/1
switch(config-if) # qos shape 10 percent
```

Configuring threshold profiles

The threshold profile is an optional configuration that specifies a per-packet action to be taken for each port queue when the queue utilization reaches or exceeds the configured threshold. The per-queue configuration within the threshold profile is optional, which means any number of queues may be configured. An unconfigured queue means that no threshold action behavior will occur. Also, an empty threshold profile is valid and can be applied.

Use the `apply qos threshold-profile <THRESHOLD-NAME>` command in the global context to configure all ports to use the profile, or in the interface context to configure the interface to use the profile. No threshold profiles are created or configured by default.

Each entry in a threshold profile can configure a WRED action for a particular queue and color combination. For WRED action, it is possible to configure separate thresholds for responsive protocol packets (for example, TCP) as well as non-responsive protocol packets (for example, UDP).

In an environment where congestion management features are required in order to reduce latency and responsive transport protocols are in use, ECN can be configured on queues carrying delay-sensitive traffic. The desired result is that a network device's port-queue utilization is actively managed, resulting in ECN-capable transport (ECT) packets being Congestion Encountered (CE) marked when queue utilization reaches or exceeds a configured threshold.

Procedure

1. Create a threshold profile defining one or more queue threshold configurations with a WRED action.
Applicable only on the 5420, 6200, 6300, and 6400v1 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 6 action wred-resp yellow min-threshold
40 percent max-threshold 80 percent
switch(config-threshold)# queue 6 action wred-non-resp yellow min-
threshold 50 percent max-threshold 90 percent
```

Applicable only on the 6400v2 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 6 action wred-resp yellow min-threshold
40 percent max-threshold 80 percent max-prob 40 percent
switch(config-threshold)# queue 6 action wred-non-resp yellow min-
threshold 50 percent max-threshold 90 percent max-prob 50 percent
```

2. Apply the threshold profile globally (all ports), or apply the threshold profile as a port override to any ports that require WRED behavior.

(Option 1) Apply the threshold profile as a global default (all ports):

```
switch(config)# apply qos threshold-profile threshprofile
```

(Option 2) Apply the threshold profile to specific ethernet or LAG interfaces as a port override:

```
switch(config)# int 1/1/1  
switch(config-if)# apply qos threshold-profile threshprofile  
switch(config)# int 1/1/2  
switch(config-if)# apply qos threshold-profile threshprofile  
switch(config)# int lag 10  
switch(config-if)# apply qos threshold-profile threshprofile
```

Supporting Ethernet 802.1D Class of Service

About this task

IEEE 802.1Q is the most current Ethernet standard for Class of Service (CoS). It superseded an earlier standard, 802.1D, in 2005. IEEE 802.1Q slightly changed the ordering of the classes of service from its predecessor IEEE 802.1D for CoS 2 and CoS 0:

CoS 802.1Q	CoS 802.1D
7 Network Control	7 Network Control
6 Internetwork Control	6 Voice (<10ms latency)
5 Voice (<10ms latency)	5 Video (<100ms latency)
4 Video (<100ms latency)	4 Controlled Load
3 Critical Applications	3 Excellent Effort
2 Excellent Effort	0 Best Effort
0 Best Effort	2 Spare
1 Background	1 Background

In 802.1D, both CoS 2 and CoS 1 are below CoS 0 (Best Effort).

When a switch is installed in a network of devices following 802.1D Class of Service, the QoS Cos map must be re-configured to follow the 802.1D standard by swapping the assignments of CoS 0 and 2:

```

switch# config
switch(config)# qos cos-map 0 local-priority 2 color green name Best_Effort
switch(config)# qos cos-map 2 local-priority 1 color green name Spare
switch(config)# exit
switch# show qos cos-map

```

code_point	local_priority	color	name
0	2	green	Best_Effort
1	0	green	Background
2	1	green	Spare
3	3	green	Critical_Applications
4	4	green	Video
5	5	green	Voice
6	6	green	Internetwork_Control
7	7	green	Network_Control

Results

```

switch# config
switch(config)# queue-profile newProfile
switch(config-queue)# map queue 0 cos 1
switch(config-queue)# map queue 2 cos 0
switch(config-queue)# map queue 1 cos 2
switch(config-queue)# map queue 3 cos 3
switch(config-queue)# map queue 4 cos 4
switch(config-queue)# map queue 5 cos 5
switch(config-queue)# map queue 6 cos 6
switch(config-queue)# map queue 7 cos 7
switch# show qos queue-profile newProfile

```

queue_num	cos	name
0	1	
1	2	
2	0	
3	3	
4	4	
5	5	
6	6	
7	7	

Monitoring queue operation

Use the `show interface queues` command to display the traffic transmitted per queue, and the number of packets dropped due to the queue being full. (`Tx Bytes` is available on the 5420, 6200 and 6300 Switch Series.) For example:

```
switch# show interface 1/1/1 queues
Interface 1/1/1 is (Administratively down)
Admin state is down
State information: admin_down
```

	Tx Packets	Tx Bytes	Tx Drops
Q0	100	8000	0
Q1	1234567	12345678908	5
Q2	0	0	0
Q3	0	0	0
Q4	0	0	0
Q5	0	0	0
Q6	0	0	0
Q7	0	0	0

Tx Bytes: Total bytes transmitted (available on the 5420, 6200 and 6300 Switch Series). The byte count may include packet headers and internal metadata that are removed before the packet is transmitted. Packet headers added when the packet is transmitted may not be included.

Tx Packets: Total packets transmitted.

Tx Drops: The number of packets dropped by a queue before it was sent. When traffic cannot be forwarded out an egress interface, it backs up at ingress. The more servicing assigned to a queue by a schedule profile, the less likely traffic destined for that queue will back up and be dropped. Tx Drops shows the sum of packets that were dropped across all line modules (due to insufficient capacity) by the ingress Virtual Output Queues (VOQs) destined for the egress port. Applicable to the 6400 Switch Series: Because the counts are read separately from each line module, the sum is not an instantaneous snapshot.

QoS commands

Select a command from the list in the left navigation menu..

Subtopics

[clear queue-monitor interface](#)

[dwrr queue](#)

[map queue](#)

[min-bandwidth](#)

[name queue](#)

[qos cos-map](#)

[qos cos](#)

qos dscp-map
qos dscp
qos egress-rewrite
qos egress-rewrite-map
qos queue-profile
qos schedule-profile
qos shape
qos trust
qos tunnel
queue action
queue-monitor
rate-limit
show interface qos
show interface queues
show interface queue-monitor
show interface queue-monitor status
show qos cos-map
show qos dscp-map
show qos queue-profile
show qos schedule-profile
show qos trust
show qos tunnel
show queue-monitor status
strict queue

clear queue-monitor interface

Syntax

```
clear queue-monitor interface [<IFNAME>|<IFRANGE>]
```

Description

Clear the data collected on an interface since enabling queue monitoring. If no interfaces are specified, perform a clear of data collected on all interfaces with queue monitoring enabled.

Parameter	Description
<IFNAME>	Name of the interface. Format: <MEMBER>/<SLOT>/<PORT>
<IFRANGE>	Range of interfaces.

Parameter	Description
	Format: <MEMBER>/<SLOT>/<PORT> - <MEMBER>/<SLOT>/<PORT>

Examples

Clearing queue monitor data collected on interface 1/1/1:

```
config)# clear queue-monitor interface 1/1/1
Warning: clearing collected queue monitor statistics will be reflected
in all CLI sessions, any agents running in the analytics engine, and any
external systems monitoring switch statistics.
Continue (y/n)? y
```

Clearing queue monitor data collected on interfaces 1/1/1 and 1/1/2:

```
config)# clear queue-monitor interface 1/1/1-1/1/2
Warning: clearing collected queue monitor statistics will be reflected
in all CLI sessions, any agents running in the analytics engine, and any
external systems monitoring switch statistics.
Continue (y/n)? y
```

Clearing all queue monitor data collected on all interfaces:

```
config)# clear queue-monitor interface
Warning: clearing collected queue monitor statistics will be reflected
in all CLI sessions, any agents running in the analytics engine, and any
external systems monitoring switch statistics.
Continue (y/n)? y
```

Related Commands

Command	Description
queue - monitor	This command enables the queue monitoring feature, allowing the switch to collect queue statistics at 10 - second time intervals. These aggregate statistics can be used to monitor network health, troubleshoot network issues, and identify normal network behavior patterns and performance anomalies. This feature is disabled by default, but can be enabled on a maximum of 52 interfaces per switch.

Command History

Release	Modification
10.17	Command introduced on 5420, 6200, 6300 and 6400 Switch series.

Command Information

Platforms	Command context	Authority
5420 6200 (except f or JL724A, JL 725A, JL726A , JL727A, JL7 28A) 6300M/F (exc ept for JL658 A, JL659A, JL 660A, JL661A , JL662A, JL6 63A, JL664A, JL665A, JL66 6A, JL667A, J L668A, JL669 A, JL670A, JL 762A, JL761A , JL760A) 6400v2	config	Administrators or local user group members with execution rights for this command.

dwrr queue

Syntax

```
dwrr queue <QUEUE-NUMBER> [weight <WEIGHT>]  
no dwrr queue <QUEUE-NUMBER>
```

Description

Assigns the deficit weighted round robin (DWRR) algorithm and its weight to a queue in a schedule profile. DWRR allocates available bandwidth among all non-empty queues in relation to the queue weights.

Use **show qos schedule-profile <NAME>** to view the settings of a specific schedule profile.

The **no** form of this command removes the DWRR algorithm from a queue in a schedule profile.

Parameter	Description
<QUEUE-NUMBER>	Specifies the queue number. Range: 0 to 7.
weight <WEIGHT>	Specifies the scheduling weight. Range: 1 to 1023.

Examples

Assigning DWRR with a weight of **17** to queue **2** in the schedule profile **MySchedule**:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)# dwrr queue 2 weight 17
```

Deleting DWRR for queue **2** from the schedule profile **MySchedule**:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)# no dwrr queue 2
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	config- schedule- <NAME>	Administrators or local user group members with execution rights for this command.

map queue

Syntax

```
map queue <QUEUE-NUMBER> local-priority <PRIORITY-NUMBER>
```

```
no map queue <QUEUE-NUMBER> [local-priority <PRIORITY-NUMBER>]
```

Description

Assigns a local priority to a queue in a queue profile. By default, the larger the queue number the higher its priority. A queue without a local priority value assigned to it is not used to store packets. The same queue can be assigned multiple local priorities.

The **no** form of this command removes the specified local priority from a specific queue. If no local priority number is specified, then all local priorities are removed from the queue.

Parameter	Description
<code><QUEUE-NUMBER></code>	Specifies the queue number. Range: 0 to 7.
<code><PRIORITY-NUMBER></code>	Specifies the local priority. Range: 0 to 7, where 0 is the lowest priority and 7 is the highest.

Usage

The following commands illustrate a valid configuration, where every local priority value is assigned to a queue:

```
map queue 0 local-priority 0
map queue 1 local-priority 1
map queue 1 local-priority 2
map queue 3 local-priority 3
map queue 4 local-priority 4
map queue 5 local-priority 5
map queue 5 local-priority 6
map queue 5 local-priority 7
```

The following commands illustrate an invalid configuration, because local priority 2 is not assigned to a queue:

```
map queue 0 local-priority 0
map queue 1 local-priority 1
map queue 2 local-priority 3
map queue 3 local-priority 4
map queue 4 local-priority 5
map queue 5 local-priority 6
map queue 5 local-priority 7
```

Examples

Assigning priority **7** to queue **7** in profile **myprofile**:

```
switch(config)# qos queue-profile myprofile
switch(config-queue)# map queue 7 local-priority 7
```

Removing priority **7** from queue **7** in profile **myprofile**:

```
switch(config)# qos queue-profile myprofile
switch(config-queue)# no map queue 7 local-priority 7
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	config-queue	Administrators or local user group members with execution rights for this command.

min-bandwidth

Syntax



NOTE

The min-bandwidth command only applies to 6200 and 6300 Series Switches.

```
min-bandwidth queue <QUEUE-NUMBER> percent <PERCENTAGE> [max-bandwidth  
<RATE> {kbps|percent}]]  
no min-bandwidth queue <QUEUE-NUMBER> percent <PERCENTAGE> [max-bandwidth  
<RATE> {kbps|percent}]]
```

Description

Assigns the Guaranteed Minimum Bandwidth (GMB) algorithm and a percentage of bandwidth to a queue. GMB allocates available bandwidth among all non-empty queues in relation to their configured minimum bandwidth. Non-empty queues are serviced first in strict order up to their minimum bandwidth. If there is any remaining bandwidth, the scheduler will strictly service any remaining non-empty queues.

Egress queue shaping can be configured using the **max-bandwidth** option to limit the amount of traffic transmitted per output queue at all times, even when there is leftover bandwidth available on the port. The buffer associated with each egress queue stores the excess traffic to smooth the output rate. Sustained rates of traffic above the maximum bandwidth will eventually fill the output queue, causing tail drops. Use **show interface < IF-NAME > queues** to determine if any tail-drop errors have occurred.

To remove only egress queue shaping, re-enter the **min-bandwidth queue** command without the **max-bandwidth** parameter.

The **no** form of this command only clears the algorithm for a queue if GMB has been assigned.

Occasionally, the following errors may occur:

- *The schedule profile total sum of GMB percentages must not exceed 100.*
This error occurs when attempting to apply a schedule profile with sum of GMB percentages of queues exceed 100 percentage. The solution is to configure GMB percentage for queues, so that the sum of percentage must not exceed 100.
- *The max-bandwidth cannot be greater than 100 percent.*
This error occurs when a max-bandwidth value greater than 100 percent is configured on a queue.
- *The max-bandwidth cannot be less than <NUM> kbps.*
This error occurs when a kbps max-bandwidth value less than the supported minimum kbps shape value is configured on a queue. The supported minimum kbps shape value can be retrieved using the **show capacities** command.

Parameter

Description

Specifies the queue number. Range: 0 to 7.

Parameter	Description
<code><QUEUE-NUMBER></code>	
<code><PERCENTAGE></code>	Specifies bandwidth percentage used for GMB scheduling. Range: 0 to 100.
<code>max-bandwidth <RATE></code>	Specifies the maximum bandwidth rate allowed on the queue in Kbps. Range: 64 to 100000000. Alternatively, the maximum bandwidth rate can be configured on the queue as a percentage of the port shape or link bandwidth if a port shape is not configured. The allowed range is 1 - 100.

Examples Assigning queue **0** of schedule profile **S1** the GMB scheduling algorithm with minimum bandwidth of **5 percent**:

```
switch(config)# qos schedule-profile S1
switch(config-schedule)# min-bandwidth queue 0 percent 5
```

Removing GMB from queue 0:

```
switch(config)# qos schedule-profile s1
switch(config-schedule)# no min-bandwidth queue 0
```

Command History

Release	Modification
10.13	Added max - bandwidth parameter.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	config- schedule- <code><NAME></code>	Administrators or local user group members with execution rights for this command.

name queue

Syntax

```
name queue <QUEUE-NUMBER>
           <DESCRIPTION>
no name queue <QUEUE-NUMBER>
```

Description

Assigns a description to a queue in a queue profile. This is for identification purposes and has no effect on configuration.

The **no** form of this command removes the description associated with a queue.

Parameter	Description
<code><QUEUE-NUMBER></code>	Specifies the queue number. Range: 0 to 7.
<code><DESCRIPTION></code>	Specifies a queue description for identification purposes. Range : 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).

Examples Assigning the description **priority-traffic** to queue **7**:

```
switch(config)# qos queue-profile myprofile
switch(config-queue)# name queue 7 priority-traffic
```

Removing the description from queue **7**:

```
switch(config)# qos queue-profile myprofile
switch(config-queue)# no name queue 7
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	config-queue	Administrators or local user group members with execution rights for this command.

qos cos-map

Syntax

```
qos cos-map <CODE-POINT> local-priority <PRIORITY-NUMBER> [color <COLOR>]
[name <DESCRIPTION>]
no qos cos-map <CODE-POINT>
```

Description

Defines the local priority assigned to incoming packets for a specific 802.1 VLAN priority code point (CoS) value. The CoS map values are used to mark incoming packets when QoS trust mode is set to **cos**. In **trust none** mode, CoS map entry 0 is used to set the port default local priority and color.

To see the default CoS map settings, use the following command:

```
switch# show qos cos-map default
code_point local_priority color  name
-----
0          1             green  Best_Effort
1          0             green  Background
2          2             green  Excellent_Effort
3          3             green  Critical_Applications
4          4             green  Video
5          5             green  Voice
6          6             green  Internetwork_Control
7          7             green  Network_Control
```

The **no** form of this command restores the assignments for a CoS map value to the default setting.

Parameter	Description
	Specifies an 802.1 VLAN priority CoS value. Range: 0 to 7. Default 0.

Parameter	Description
<code><CODE-POINT></code>	
<code>local-priority <PRIORITY-NUMBER></code>	Specifies a local priority value to associate with the <code>CODE-POINT</code> value. Range: 0 to 7. Default: 0.
<code>color <COLOR></code>	Reserved for future use.
<code>name <DESCRIPTION></code>	Specifies a description for the CoS setting. The name is for identification only, and has no effect on queue configuration. Range : 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).

Usage

Examples

Mapping CoS value **1** to a local priority of **2**:

```
switch(config)# qos cos-map 1 local-priority 2
```

Mapping CoS value **1** to the default local priority value:

```
switch(config)# no qos cos-map 1
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	<code>config</code>	Administrators or local user group members with execution rights for this command.

qos cos

Syntax

```
qos cos <CODE-POINT>
no qos cos
```

Description

Configures a CoS PCP remark for an Ethernet or LAG interface. Packets that ingress on the interface are remarked at egress using the configured CoS PCP value.

The remark only occurs when QoS trust mode on the interface is set to **none**.

If QoS trust mode is not set to **none**, then the remark is ignored, and the following commands will show the CoS remark status as **ignored (incompatible Port Access Trust configuration)** or **not applied' (incompatible QoS global/port Trust configuration)**:

- show running-configuration
- show interface <PORT-NUM>
- show interface <PORT-NUM> qos

The **no** form of this command removes a CoS remark on an interface.

Parameter

Description

<CODE-POINT>

Specifies an 802.1 VLAN priority CoS value. Range: 0 to 7.

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Configuring a CoS remark of **3** on interface **1/1/1**:

```
switch(config) # interface 1/1/1
switch(config-if) # qos trust none
switch(config-if) # qos cos 3
```

Deleting a CoS remark of **3** on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# no qos cos
```

Command History

Release	Modification
---------	--------------

10.07 or earlier	- -
------------------	-----

Command Information

Platforms	Command context	Authority
5420	config-if	Administrators or local user group members with execution rights for this command.
6200		
6300		
6400		

qos dscp-map

Syntax

```
qos dscp-map <CODE-POINT> local-priority <PRIORITY-NUMBER> [color <COLOR>]
[cos <PCP-VALUE>] [name <DESCRIPTION>]
no qos dscp-map <CODE-POINT>
```

Description

Defines the local priority color assigned to incoming packets for a specific IP differentiated services code point (DSCP) value. The DSCP map values are used to prioritize incoming packets when QoS trust mode is set to **dscp**.

The **no** form of this command restores the assignments for a code point to the default setting.



NOTE

Use **show qos dscp-map** to view the current settings. To see the default DSCP map settings, use the following command:

```
switch# show qos dscp-map default
DSCP      code_point cos color  name
-----
000000    0          0  green  CS0
000001    1          0  green
000010    2          0  green
000011    3          0  green
000100    4          0  green
000101    5          0  green
...
101101    45         5  green
101110    46         5  green  EF
101111    47         5  green
110000    48         6  green  CS6
...
111101    61         7  green
111110    62         7  green
111111    63         7  green
```

```
switch# show qos dscp-map default
DSCP      code_point cos  name
-----
000000    0          0   CS0
000001    1          0
000010    2          0
000011    3          0
000100    4          0
000101    5          0
...
101101    45         5
101110    46         5   EF
101111    47         5
110000    48         6   CS6
...
111100    60         7
111101    61         7
111110    62         7
111111    63         7
```

```
switch# show qos dscp-map default
code_point local_priority cos color  name
-----
0          1              green  CS0
1          1              green
2          1              green
```

```

3          1          green
4          1          green
5          1          green
...
45         5          green
46         5          green    EF
47         5          green
48         6          green    CS6
...
61         7          green
62         7          green
63         7          green
switch# show qos dscp-map default
code_point local_priority color    name
-----
0          1          green    CS0
1          1          green
2          1          green
3          1          green
4          1          green
5          1          green
...
45         5          green
46         5          green    EF
47         5          green
48         6          green    CS6
...
61         7          green
62         7          green
63         7          green

```

Parameter	Description
<code><CODE-POINT></code>	Specifies an IP differentiated services code point. Range: 0 to 3. Default: 0.
<code>local-priority <PRIORITY-NUMBER></code>	Specifies a local priority value to associate with the CODE - POINT value. Range: 0 to 7. Default: 0.
<code>color <COLOR></code>	Configures the QoS CoS map color. The supported colors are green, red, and yellow. The default color is green.

Parameter	Description
<code>cos <PCP-VALUE></code>	Specifies an optional 802.1p VLAN Priority Code Point remark value. Range: 0 to 7. Default: No remark.
<code>name <DESCRIPTION></code>	Specifies a description for the DSCP setting. The name is used for identification only, and has no effect on queue configuration. Range: 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).

Examples Setting code point **1** to a local priority of **2** and a CoS of **0**:

```
switch(config)# qos dscp-map 1 local-priority 2 cos 0
```

Setting code point **1** to the default value:

```
switch(config)# no qos dscp-map 1
```

Setting code point **46** to a Cos of **7** and CoS map color as **yellow**: Setting code point **41** to a CoS of **6**:

Setting code point **41** to the default value: Setting code point **1, 3-5** to a local priority **2**, and CoS color as **green** with the description **EntryName**:

Command History

Release	Modification
10.13	Added <COLOR> parameters.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420	<code>config</code>	Administrators or local user group members with execution rights for this command.
6200		
6300		
6400		

qos dscp

Syntax

```
qos dscp <CODE-POINT>
no qos dscp
```

Description

Configures a differentiated services code point (DSCP) remark for an Ethernet or LAG interface. IPv4 and IPv6 packets that ingress on the interface are remarked at egress using the configured DSCP value.

The remark only occurs when QoS trust mode on the interface is set to **none**. If a DSCP remark is configured and then trust mode is subsequently set to **cos** or **dscp**, then the DSCP remark is ignored.

The following commands will show the remark status as ignored (incompatible Port Access Trust configuration) or not applied (incompatible QoS global or port trust configuration):

- **show running-configuration**
- **show interface <INTERFACE-NAME>**
- **show interface <INTERFACE-NAME> qos**

The **no** form of this command removes a CoS remark on an interface.

Parameter	Description
<code><CODE-POINT></code>	Specifies an IP differentiated services code point value. Range: 0 to 63.

Usage

Order of operation for arriving IPv4 or IPv6 packets:

1. Trust none is applied with initial local-priority and color metadata assigned from the CoS Map entry index 0.
2. The local-priority value and the queue profile are then used to determine the queue for the packet.
3. The remark of the packet's DSCP metadata field is performed. When the packet is transmitted, its IPv4 or IPv6 DS header is remarked with the DSCP metadata.

For arriving non-IP packets:

Trust none is applied with initial local-priority and color metadata assigned from the CoS Map entry index 0. This selects the queue for packet scheduling. The PCP of any tagged non-IP packets is unchanged.

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Configuring a DSCP remark of **43** on interface **1/1/1**:

```
switch(config) # interface 1/1/1
switch(config-if) # qos trust none
switch(config-if) # qos dscp 43
```

Deleting a DSCP remark of **43** on interface **1/1/1**:

```
switch(config) # interface 1/1/1
switch(config-if) # no dscp 43
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420	config-if	Administrators or local user group members with execution rights for this command.
6200	config-lag-if	
6300		
6400		

qos egress-rewrite

Syntax

```
qos egress-rewrite [cos|dscp]
no qos egress-rewrite [cos|dscp]
```

Description

Enables a rewrite of the 802.1Q VLAN priority code point (PCP) or DSCP values for all traffic egressing on the configured interface. The PCP or DHCP value is determined by a globally configured egress priority rewrite map based on the traffic's local priority. Use this command to configure a system-wide mapping from internal local priorities to 802.1Q VLAN priority code point (PCP) or DSCP values.

The **no** form of this command disables egress priority rewrite on the interface.

Use **show qos egress-rewrite-map** to view the current global egress priority rewrite map. Use **show qos egress-rewrite-map default** to view the factory default egress priority rewrite map.



NOTE

The mapping from local priority to egress priority is determined by the Egress Rewrite Map, which can be configured using the **qos egress-rewrite-map** command in the global configuration context.

Parameter	Description
cos	Enables egress rewrite of the 802.1Q VLAN Priority Code Point (PCP) value for all traffic egressing on the interface.
dscp	Enables an egress rewrite of the DSCP value for all traffic egressing on the interface.

Examples

Configuring egress rewrite for both PCP and DSCP values on interface 1/1/1:

```
switch(config)# interface 1/1/1
switch(config-if)# qos egress-rewrite cos
switch(config-if)# qos egress-rewrite dscp
```

Disabling egress priority rewrite:

```
switch(config-if)# no qos egress-rewrite cos
switch(config-if)# no qos egress-rewrite dscp
```

Command History

Release	Modification
10.18	Command updated to support DHCP rewrite on egress.
10.17	Command introduced.

Command Information

Platforms	Command context	Authority
	config-if config-lag-if	Administrators or local user group members with execution rights for this command.

qos egress-rewrite-map

Syntax

```
qos egress-rewrite-map local-priority <PRIORITY-RANGE> {cos <PCP-VALUE>} |  
{ dscp <DSCP-VALUE>}  
no qos egress-rewrite-map local-priority <PRIORITY-RANGE> {cos <PCP-VALUE>} |  
{ dscp <DSCP-VALUE>}
```

Description

Configures a system-wide mapping from internal local priority to an 802.1Q VLAN priority code point (PCP) or DSCP value. The **qos egress-rewrite cos** command allows the PCP value to be rewritten on egress, and the **qos egress-rewrite dscp** command allows the DSCP value to be rewritten on egress. The local priority associated with a packet affects only its behavior within the switch. By default, it does not influence the priority value written to the packet upon transmission.

This command, along with its **no** form, accepts a single local priority, a range of local priorities, or a comma-separated list of local priorities and ranges. This provides a convenient method for configuring multiple entries in the map. Note that the specified range is not saved as-is; commands such as **show running-config** will display one code point per line, even if a single command configured multiple code points.

The **no** form of this command restores the rewrite assignments for one or more local priorities to the default rewrite assignment. If you specify any parameters in addition to the local priorities, the default rewrite assignments will only be restored for those local priorities whose current configuration override

exactly matches the provided parameters. The current configuration override is the one shown by **show running-config**.



NOTE

By default, the Egress Rewrite Map is set to the inverse of the default CoS map. Therefore, if the CoS map is modified, the Egress Rewrite Map should also be updated to reflect the changes and maintain consistency.

If you configure a DSCP map, the default Egress Rewrite Map is configured such that the local priorities correspond to CS<X> values in the default DSCP map. If the default DSCP map undergoes any change, the Egress Rewrite Map should also be changed to match the new DSCP map.

Parameter	Description
<code>local-priority <PRIORITY-RANGE></code>	Specifies a range of priority values or a single priority value. Supported values: 0-7.
<code>cos <PCP-VALUE></code>	Specifies an 802.1Q VLAN Priority Code Point rewrite value to associate with the PRIORITY - RANGE value(s). Supported values: 0-7.
<code>dscp <DSCP-VALUE></code>	Specifies a DSCP rewrite value to associate with the PRIORITY-RANGE value(s). Supported values: 0-63.

Examples

Configuring an egress rewrite map for PCP and DSCP values

```
switch(config)# qos egress-rewrite-map local-priority 6,7 cos 3
switch(config)# qos egress-rewrite-map local-priority 6,7 dscp 5
```

If you issue the `no qos egress-rewrite-map` command, any `cos` or `dscp` value included with this command must match the existing map configuration, or the output of this command will display the following error

```
switch(config)# qos egress-rewrite-map local-priority 6,7 cos 3
switch(config)# no qos egress-rewrite-map local-priority 6,7 cos 6
local-priority 6: The cos value entered does not match the currently
configured cos value.
local-priority 7: The cos value entered does not match the currently
configured cos value.
```

Command History

Release	Modification
10.18	The egress rewrite map now supports DSCP values.
10.17	Command introduced.

Command Information

Platforms	Command context	Authority
	config	Administrators or local user group members with execution rights for this command.

qos queue-profile

Syntax

```
qos queue-profile <NAME>
no qos queue-profile <NAME>
```

Description

Creates a new QoS queue profile and switches to the **config-queue** context for the profile. Or, if the specified QoS queue profile exists, this command switches to the **config-queue** context for the profile. A queue profile maps queues to local-priority values. Each profile has one to eight queues numbered 0 to 7. The larger the queue number, the higher its priority during transmission scheduling.

A queue profile named **factory-default** is defined by default and is automatically applied to all interfaces. It cannot be edited or deleted. Use the command **show qos queue-profile factory-default** to view this profile. Do not use **show running-configuration**, as it will only display changes from the initial values. Use **show qos queue-profile [NAME]** to view the status of all queue profiles or the settings of the named profile.

The **no** form of this command removes the specified QoS queue profile. Only profiles that are not currently applied can be removed.

Parameter	Description
	Specifies the name of the QoS queue profile to create or configure. Range: 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).

Parameter	Description
<NAME>	

Examples

Creating the profile **myprofile**:

```
switch(config)# qos queue-profile myprofile
switch(config-queue)#
```

Deleting the profile **myprofile**:

```
switch(config)# no qos queue-profile myprofile
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

qos schedule-profile

Syntax

```
qos schedule-profile <NAME>
no qos schedule-profile <NAME>
```

Description

Creates a QoS schedule profile and switches to the **config-schedule** context for the profile. If the specified schedule profile exists, this command switches to the **config-schedule** context for the profile. The schedule profile determines the order in which queues are selected to transmit a packet, and the amount of service defined for each queue.

Parameter	Description
<NAME>	Specifies the name of the QoS queue profile to create or configure. Range: 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).

Usage

Queues in a schedule profile are numbered consecutively starting from zero. Queue zero is the lowest priority queue. The larger the queue number, the higher priority the queue has in scheduling algorithms.

A profile named **factory-default** is defined by default and applied to all interfaces. It cannot be edited or deleted. To see its settings, use the command:

```
switch# show qos schedule-profile factory-default
queue_num algorithm weight
-----
0          dwrr       1
1          dwrr       1
2          dwrr       1
3          dwrr       1
4          dwrr       1
5          dwrr       1
6          dwrr       1
7          dwrr       1
```

A profile named **strict** is predefined and cannot be edited or deleted. The strict profile services all queues of the queue profile to which it is applied, using the strict priority algorithm.

A schedule profile must be defined on all interfaces at all times.

There are two permitted configurations for a schedule profile:

1. All queues use the same scheduling algorithm (for example, WFQ).
2. The highest queue number uses strict priority, and all remaining (lower) queues use the same algorithm (for example, WFQ). This supports priority scheduling behavior necessary for the IETF RFC 3246 Expedited Forwarding specification (<https://tools.ietf.org/html/rfc3246>).
3. All queues use the same scheduling algorithm (for example, DWRR).
4. The highest queue number uses strict priority, and all remaining (lower) queues use the same algorithm (for example, DWRR). This supports priority scheduling behavior necessary for the IETF RFC 3246 Expedited Forwarding specification (<https://tools.ietf.org/html/rfc3246>).
5. All queues use the same scheduling algorithm (for example, GMB).

6. The highest queue number uses strict priority, and all remaining (lower) queues use the same algorithm (for example, GMB). This supports priority scheduling behavior necessary for the IETF RFC 3246 Expedited Forwarding specification (<https://tools.ietf.org/html/rfc3246>).

Only limited changes can be made to an applied schedule profile:

- The weight of a wfq queue.
- The bandwidth of a strict queue or a min-bandwidth queue.
- The algorithm of the strict or WFQ queue can be swapped between WFQ and strict, and vice versa.
- The weight of a dwrr queue.
- The bandwidth of a strict queue or a min-bandwidth queue.
- The algorithm of the highest numbered queue can be swapped between dwrr and strict, and vice versa.
- The percentage of a GMB queue.
- The bandwidth of a strict queue or a min-bandwidth queue.
- The algorithm of the highest numbered queue can be swapped between GMB and strict, and vice versa.

Applicable to REST: Any other changes will result in an unusable schedule profile, and the switch will revert to the **factory-default** profile until the profile is corrected.

The **no** form of this command removes the specified QoS schedule profile when it is not applied. Only profiles that are not currently applied to an interface can be removed.

Examples

Creating the schedule profile **MySchedule**:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)#
```

Deleting the schedule profile **MySchedule**:

```
switch(config)# no qos schedule-profile MySchedule
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

qos shape

Syntax

```
qos shape <RATE> [kbps|percent]
no qos shape
```

Description

Limits the egress bandwidth on an interface to a value that is lower than its line rate.

Errors will be generated in the following events:

- A user configures a port-shaping value that is greater than 100 percent
- A user configures a kbps port-shaping value that is less than the supported minimum kbps value. The supported minimum kbps shaping value can be retrieved using the **show capacities** command.

The **no** form of this command removes shaping from an interface.

Parameter	Description
<code><RATE></code>	Specifies the maximum traffic rate in kbps. Range: 1 to 10000 0000. Alternatively, the bandwidth can also be configured as a percentage of link bandwidth. The supported range is 1 - 100. Default units are kilobits per second.

Usage

When the traffic rate destined for the port exceeds the configured egress bandwidth, the switch will buffer the excess up to the limit of the queues. Rates larger than the interface's link rate will have no effect. When set on a LAG, each member Ethernet port independently shapes its egress bandwidth to the specified rate.

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Configuring an egress port shaping rate of 400 Mbps on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# qos shape 400000 kbps
```

Configuring an egress port-shaping rate of 40% on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# qos shape 40 percent
```

Deleting egress port shaping on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# no qos shape
```

Command History

Release	Modification
10.13	Added optional kbps and percent parameters.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420	config-if	Administrators or local user group members with execution rights for this command.
6200		
6300		
6400		

qos trust

Syntax

Description

In the **config** context:

- This command sets the trust mode that is globally applied to all interfaces that do not have a trust mode configured.
- The **no** form of this command restores all interfaces that do not currently have a trust mode configured to the default setting.

In the **config-if** context:

- This command sets the trust mode override for a specific interface.
- The **no** form of this command clears a trust mode override. The interface then uses the global setting. This is the only way to remove a trust mode override.

Parameter	Description
none	Ignores all packet headers. Ingress packets are assigned the local priority and color values configured for CoS map entry 0. Default.

Example

Setting the global trust mode to **dscp**, which is applied to all interfaces that do not already have an individual trust mode configured. An override is then applied to interface **2/2/2**, and LAG 100, setting trust mode to **cos**:

```
switch(config)# qos trust dscp
switch(config)# interface 2/2/2
switch(config-if)# qos trust cos
switch(config-if)# interface lag 100
switch(config-if)# qos trust cos
```

In the example below, 1 is the **local-priority** value. This overrides the global `qos trust dscp`, causing all arriving packets at interface 1/1/1 to be assigned the specified priority, and thereby ignoring the configuration in CoS map entry 0. Optionally, the color can be set as well:

```
switch(config)# interface 1/1/1
switch(config-if)# qos trust none local-priority 1 color yellow
switch(config)# interface 1/1/1
switch(config-if)# no qos trust
```

Display ethernet port 6 with port-specific configuration to specify the default **local-priority**. The **color** configuration is displayed as well:

```
switch# show interface 1/1/6
Interface 1/1/6 is up
```

```

Admin state is up
Link state: up for 16 seconds (since Tue Sep 12 00:11:36 UTC 2023)
Link transitions: 1
Description:
Persona:
Hardware: Ethernet, MAC Address: 3c:2c:99:ff:ea:97
MTU 1500
Type 10G-LR / 10G SFP+ LR
Full-duplex
qos trust none local-priority 1 color yellow (override)
rate-limit broadcast 1 percent (99968 kbps actual)
Speed 10000 Mb/s
Auto-negotiation is off
Flow-control: off

```

Display QoS on ethernet port 5:

```

switch# show interface 1/1/5 qos
Interface 1/1/5 is down
Admin state is up
qos trust none local-priority 1 color green (override)
qos queue-profile factory-default (global)
qos schedule-profile EQSExample (override)
qos dscp 47
rate-limit unknown-unicast 64 pps (64 pps actual)
rate-limit broadcast 500 pps (500 pps actual)
qos shape 200000 kbps (200064 kbps actual) burst 70 (70 actual)

```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)
Q1	10082461	kbps	120
Q4	20164923	kbps	32
Q7	30247384	kbps	120

Override of DSCP value in the interface context:

```

switch(config)# interface 1/1/1
switch(config-if)# qos trust none
switch(config-if)# qos dscp 1

```

Override of CoS value in the interface context:

```

switch(config)# interface 1/1/1

```

```
switch(config-if) # qos trust none
switch(config-if) # qos cos 1
```



NOTE

The warning message QoS port remark configurations are not applied when the QoS trust mode is cos or dscp, is seen if a port trust command other than trust none is attempted when there is already a remark configuration on the port. To restore the old remark configuration, configure the port trust mode to none.



NOTE

The warning message QoS port remark configurations are not applied when the global QoS trust mode is cos or dscp, is seen if a port no qos trust command is attempted when there is already a remark configuration on the port and the global trust mode is not none. To re-apply the remark configuration, set the port trust mode to none.

Command History

Release	Modification
---------	--------------

10.07 or earlier	- -
------------------	-----

Command Information

Platforms	Command context	Authority
All platforms	config config-if config-lag-if	Administrators or local user group members with execution rights for this command.

qos tunnel

Syntax

```
qos tunnel cos <CODE-POINT> dscp-map <DSCP>
no qos tunnel cos <CODE-POINT> dscp-map <DSCP>
```

Description

This command is used to configure the DSCP value populated in the tunnel IP header for non-IP packets. This is necessary to ensure that proper priority treatment can be achieved for the non-IP packets as they pass through the tunnel. If left unconfigured, the default mapping uses a DSCP value of 0 in the tunnel encapsulation header for all PCP values.

Parameter	Description
<code><CODE-POINT></code>	Specifies the Priority Code Point (PCP) value to be mapped. The PCP value ranges from 0 to 7.
<code><DSCP></code>	Specifies the Differentiated Services Code Point (DSCP) value that needs to be populated on the tunnel header for non-IP traffic. The DSCP value ranges from 0 to 63. Default: 0

Usage

1. Enter global configuration mode.
2. Use the `qos tunnel cos <CODE-POINT> dscp-map <DSCP>` command to map the desired PCP value to the corresponding DSCP value for non-IP traffic over a tunnel.
3. Verify the configuration using the `show qos tunnel cos-dscp-map` command.
4. Ensure that the PCP and DSCP values are correctly mapped to maintain the desired QoS settings across the network.
5. This configuration is essential for networks that use Layer 2 tunneling and require consistent QoS treatment for tunneled traffic.

Examples

The following examples show command options for the mapping of non-IP traffic with 802.1Q Priority Code Point to DSCP 44 in the IP header of tunnel traffic.

Configuring the mapping :

```
switch(config)# qos tunnel cos 2 dscp-map 44
```

Deleting the mapping:

```
switch(config)# no qos tunnel cos 2 dscp-map 44
```


Command History

Release	Modification
10.16.1000	Command enabled on 8360v2, 8100 and 6300 Switch Series.

Command Information

Platforms	Command context	Authority
6300	config	Administrators or local user group members with execution rights for this command.

queue action

Syntax

WRED

HPE Aruba Networking 5420, 6200, 6300, 6400v1 Switch Series

```
queue <0-7> action wred-resp { green | yellow | red } min-threshold <WRED-MIN-LIMIT> percent max-threshold <WRED-MAX-LIMIT> percent
queue <0-7> action wred-non-resp { green | yellow | red } min-threshold <WRED-MIN-LIMIT> percent max-threshold <WRED-MAX-LIMIT> percent
```

HPE Aruba Networking 6400v2 Switch Series

```
queue <0-7> action wred-resp { green | yellow | red } min-threshold <WRED-MIN-LIMIT> percent max-threshold <WRED-MAX-LIMIT> percent max-prob <WRED-MAX-PROB> percent
queue <0-7> action wred-non-resp { green | yellow | red } min-threshold <WRED-MIN-LIMIT> percent max-threshold <WRED-MAX-LIMIT> percent max-prob <WRED-MAX-PROB> percent
```

Description

Defines the threshold settings and action for a specified queue in a threshold-profile. For ECN, when queue utilization exceeds the threshold value, ECT (ECN-Capable Transport) packets will be CE (Congestion Encountered) marked when transmitted.

For WRED, when queue utilization exceeds the threshold value, WRED action will randomly early-drop packets to signal congestion. More than one WRED action can be configured on a single queue for different packet colors.

The **no** form of this command removes the settings for a queue.

Parameter	Description
<code><0-7></code>	Specifies the queue number. Range: 0 to 7.
<code><WRED-MIN-LIMIT></code>	Specifies the queue minimum utilization threshold value for WRED to probabilistically start dropping packets.
<code><WRED-MAX-LIMIT></code>	Specifies the queue maximum utilization threshold value for WRED, after which every packet is dropped.

Examples

Configuring a responsive WRED action on queue 2 for red-, yellow-, and green-colored packets:

Applicable only on the HPE Aruba Networking 5420, 6200, 6300, and 6400v1 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 2 action wred-resp green min-threshold 70
percent max-threshold 100 percent
switch(config-threshold)# queue 2 action wred-resp yellow min-threshold 60
percent max-threshold 95 percent
switch(config-threshold)# queue 2 action wred-resp red min-threshold 50
percent max-threshold 80 percent
```

Applicable only on the HPE Aruba Networking 6400v2 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 2 action wred-resp green min-threshold 70
percent max-threshold 100 percent max-prob 70 percent
switch(config-threshold)# queue 2 action wred-resp yellow min-threshold 60
percent max-threshold 95 percent max-prob 85 percent
switch(config-threshold)# queue 2 action wred-resp red min-threshold 50
percent max-threshold 80 percent max-prob 90 percent
```

Configuring a non-responsive WRED action on queue 4 for red-, yellow-, and green-colored packets:

Applicable only on the HPE Aruba Networking 5420, 6200, 6300, and 6400v1 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 4 action wred-non-resp green min-threshold
70 percent max-threshold 100 percent
switch(config-threshold)# queue 4 action wred-non-resp yellow min-threshold
```

```
65 percent max-threshold 95 percent
switch(config-threshold)# queue 4 action wred-non-resp red min-threshold 50
percent max-threshold 80 percent
```

Applicable only on the HPE Aruba Networking 6400v2 Switch Series

```
switch(config)# qos threshold-profile threshprofile
switch(config-threshold)# queue 4 action wred-non-resp green min-threshold
70 percent max-threshold 100 percent max-prob 71 percent
switch(config-threshold)# queue 4 action wred-non-resp yellow min-threshold
65 percent max-threshold 95 percent max-prob 82 percent
switch(config-threshold)# queue 4 action wred-non-resp red min-threshold 50
percent max-threshold 80 percent max-prob 95 percent
```

Removing a threshold from queue **7** in profile **mythreshold**:

```
switch(config)# qos threshold-profile mythreshold
switch(config-threshold)# no queue 7
```

Command History

Release	Modification
10.11	WRED syntax support introduced in 6200, 6300, 6400, 8320, 8325, 8360, 8400, 9300, and 10000 Switch Series.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	config- threshold	Administrators or local user group members with execution rights for this command.

queue-monitor

Syntax

```
queue-monitor  
no queue-monitor
```

Description

This command enables the queue monitoring feature, allowing the switch to collect queue statistics. then display this information as a queue statistics history. These aggregate statistics can be used to monitor network health, troubleshoot network issues, and identify normal network behavior patterns and performance anomalies. This feature is disabled by default, but can be enabled on a maximum of 52 interfaces per switch.

Examples

Enabling the queue monitoring feature on interface 1/1/1:

```
(config)# interface 1/1/1  
(config-if)# queue-monitor
```

Disabling the queue monitoring feature on interface 1/1/1:

```
(config)# interface 1/1/1  
(config-if)# no queue-monitor
```

Related Commands

Command	Description
show queue - monitor status	This command is used to view the global state of the queue monitor feature. Output includes the memory consumed by the feature, the statistics being monitored for collection, and the interfaces currently enabled for monitoring.

Command History

Release	Modification
10.17	Command introduced on 5420, 6200, 6300 and 6400 Switch series.

Command Information

Platforms	Command context	Authority
5420 6200 (except f or JL724A, JL 725A, JL726A , JL727A, JL7 28A) 6300M/F (exc ept for JL658 A, JL659A, JL 660A, JL661A , JL662A, JL6 63A, JL664A, JL665A, JL66 6A, JL667A, J L668A, JL669 A, JL670A, JL 762A, JL761A , JL760A) 6400v2	config-if	Administrators or local user group members with execution rights for this command.

rate-limit

Syntax

```
rate-limit {broadcast|multicast|unknown-unicast|icmp {ip-all|ip|ipv6}}  
<RATE> {kbps|percent|pps}  
no rate-limit {broadcast|multicast|icmp}
```

Description

Sets the amount of traffic of a specific type that can ingress on an Ethernet interface, or on each port of a LAG interface. Rate limits are enforced separately on each individual member of a LAG, not on the LAG as a whole.

The **no** form of this command removes the traffic limit for the specified traffic type.

Parameter	Description
<code>{broadcast multicast unknown-unicast icmp {ip-all ip ipv6}}</code>	Specifies the type of ingress traffic to which the rate limit applies: broadcast, multicast, unknown - unicast, or ICMP. The multicast rate limit affects multicast and broadcast traffic. The broadcast rate limit only affects broadcast traffic. When both types are applied to the same interface, broadcast packets are limited to the lower of the two rate values. Layer 2 BPDU packets, like spanning tree, are also included in the multicast rate limit. The ICMP rate limit can be configured to apply to IPv4, IPv6, or all IP traffic. Only one ICMP rate - limit can be configured at a time. Applying a new ICMP rate - limit replaces any previous ICMP rate - limit.
<code><RATE> {kbps percent pps}</code>	Specifies the rate limit in kilobits per second, packets per second, or as a percentage of link bandwidth. Range: 64 to 100000000 kbps (in steps of 64 kbps), 64 to 209090910 pps (in steps of 64 pps), or 1 - 100 percent. The actual rate limit will be approximately equivalent to the minimum of the two step values that are closest to the configured rate (or for percent mode, the kbps - converted rate). The actual applied rate limit can be verified using the show interface <IF - NAME> qos command. For percentage mode, rate - limits may be shown as "not applied" until after link - up has occurred on the configured port or LAG.

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Limiting broadcast traffic to **2000pps** on interface **1/1/3**:

```
switch(config)# interface 1/1/3
switch(config-if)# rate-limit broadcast 500 kbps
```

Limiting all ICMP IPv4 traffic to **10000kbps** on interface **1/1/3**:

```
switch(config)# interface 1/1/3
switch(config-if)# rate-limit icmp ip 10000 kbps
```

Viewing the results of the previous configuration settings:

```
switch# show interface 1/1/3 qos
Interface 1/1/3 is up
Admin state is up
Description:
```

```

Hardware: Ethernet, MAC Address: 08:97:34:b1:20:00
MTU 1500
Type 1000BT
qos trust none
rate-limit broadcast 2000 pps (2000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)
Speed 1000 Mb/s
L3 Counters: Rx Disabled, Tx Disabled
Auto-Negotiation is on
Flow-control: off
Rx
    0 input packets          0 bytes
    0 input error            0 dropped
    0 CRC/FCS
L3:
    0 packets, 0 bytes
Tx
    127 output packets       16510 bytes
    0 input error            0 dropped
    0 collision
L3:
    0 packets, 0 bytes

```

Configuring a multicast rate-limit as a percentage of link bandwidth:

```

switch(config)# interface 1/1/3
switch(config-if)# rate-limit multicast 1 percent

```

Configuring an unknown-unicast rate-limit in packets per second:

```

switch(config)# interface 1/1/4
switch(config-if)# rate-limit unknown-unicast 100 pps

```

Command History

Release	Modification
10.14	Replaced the ipv4 parameter with the ip parameter. The ipv4 parameter is deprecated.
10.13	Added the percent parameter.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	config-if	Administrators or local user group members with execution rights for this command.

show interface qos

Syntax

```
show interface <INTERFACE-NAME> qos
```

Description

Shows various QoS settings for a specific interface.

Parameter	Description
<INTERFACE-NAME>	Specifies the name of an interface on the switch. Format: member/slot/port or lag number .

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

```
switch# show interface 1/1/5 qos
Interface 1/1/5 is up
Admin state is up
qos trust cos (global)
qos queue-profile factory-default (global)
qos schedule-profile factory-default (global)
qos threshold-profile test (override)
qos cos 5
qos dscp 47
rate-limit unknown-unicast 1 percent (10000 actual)
```



```

rate-limit broadcast 40000 kbps (40000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)
switch# show interface lag1 qos
Aggregate-name lag1
Admin state is up
qos trust cos (global)
qos queue-profile factory-default (global)
qos schedule-profile test (override)
qos threshold-profile test (override)
qos cos 5
qos dscp 47
rate-limit unknown-unicast 1 percent (10000 actual)
rate-limit broadcast 40000 kbps (40000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)
Per Interface Status

```

Queue	Maximum Bandwidth	Units

Q1	20000	kbps
Q4	30000	kbps
Q7	40000	kbps

```

switch# show interface 1/1/5 qos
Interface 1/1/5 is up
Admin state is up
qos trust cos (global)
qos queue-profile factory-default (global)
qos schedule-profile factory-default (global)
qos cos 5
qos dscp 47
rate-limit unknown-unicast 1 percent (10000 actual)
rate-limit broadcast 40000 kbps (40000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)

```

Showing QoS settings for interface **1/1/5**:

```

switch# show interface 1/1/5 qos
Interface 1/1/5 is up
Admin state is up
qos trust none (global)
qos queue-profile factory-default (global)
qos schedule-profile factory-default (global)
qos cos 5
qos dscp 47
rate-limit broadcast 4 percent (40000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)

```

	Forwarded Pkts	Dropped Pkts
Forwarded Bytes	Dropped Bytes	
Broadcast:	944468	1044
1044658890	85662408	
ICMP:	82210	0
2689008	0	
qos shape 200000 kbps (199999 kbps actual)		

Showing QoS settings for a two-member lag:

```
switch# show interface lag1 qos
Aggregate-name lag1
Admin state is up
qos trust cos (global)
qos queue-profile factory-default (global)
qos schedule-profile test (override)
qos cos 5
qos dscp 47
rate-limit broadcast 4 percent (40000 actual)
rate-limit icmp ip-all 10000 kbps (10000 actual)

      Forwarded Pkts      Dropped Pkts
Forwarded Bytes      Dropped Bytes
Broadcast:           944468           1044
1044658890           85662408
ICMP:                82210           0
2689008              0
qos shape 200000 kbps (199999 kbps actual per interface, 399998 kbps total
for LAG)

Per Interface Status

      Maximum Bandwidth
Queue      Bandwidth Units
-----
Q1          20000 kbps
Q4          30000 kbps
Q7          40000 kbps
```

```
switch# show interface 1/1/5 qos
Interface 1/1/5 is down
Admin state is up
qos trust none (global)
qos queue-profile factory-default (global)
qos schedule-profile EQSEExample (override)
qos dscp 47
rate-limit unknown-unicast 64 pps (64 actual)
rate-limit broadcast 500 pps (500 actual)
qos shape 200000 kbps (200064 kbps actual) burst 70 (70 actual)
```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)

Q1	10082461	kbps	120
Q4	20164923	kbps	32
Q7	30247384	kbps	120

```
switch# show interface 1/1/6 qos
```

```
Interface 1/1/6 is down
```

```
Admin state is up
```

```
qos trust none (global)
```

```
qos queue-profile factory-default (global)
```

```
qos schedule-profile EQSExample (override)
```

```
rate-limit multicast 1 percent (100000 actual)
```

```
qos shape 200000 kbps (200064 kbps actual) burst 70 (70 actual)
```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)

Q1	10082461	kbps	120
Q4	20164923	kbps	32
Q7	30247384	kbps	120

```
switch# show interface 1/1/6 qos
```

```
Interface 1/1/6 is down
```

```
Admin state is up
```

```
qos trust none (global)
```

```
qos queue-profile factory-default (global)
```

```
qos schedule-profile EQSExample (override)
```

```
rate-limit multicast 1 percent (400000 actual)
```

```
qos shape 200000 kbps (200064 kbps actual) burst 70 (70 actual)
```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)

Q1	10082461	kbps	120
Q4	20164923	kbps	32
Q7	30247384	kbps	120

```
switch# show interface 1/1/5 qos
```

```
Interface 1/1/5 is down
```

```
Admin state is up
```

```
qos trust none (global)
```

```
qos queue-profile factory-default (global)
```

```
qos schedule-profile EQSExample (override)
```

```
qos threshold-profile threshprofile (global)
```

```
rate-limit unknown-unicast 50 pps (41 actual)
```

```
rate-limit broadcast 500 kbps (505 actual)
```

```
rate-limit multicast 1 percent (10000 actual)
qos shape 200000 kbps (199999 kbps actual) burst 20 (20 actual)
```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)

Q1	10082461	kbps	20
Q4	20164923	kbps	31
Q7	30247384	kbps	15

```
switch# show interface lag1 qos
```

```
Aggregate-name lag1
```

```
Admin state is up
```

```
qos trust none (global)
```

```
qos queue-profile factory-default (global)
```

```
qos schedule-profile EQSExample (override)
```

```
qos threshold-profile threshprofile (global)
```

```
rate-limit unknown-unicast 50 pps (41 actual)
```

```
rate-limit broadcast 500 kbps (505 actual)
```

```
rate-limit multicast 1 percent (10000 actual)
```

```
qos shape 200000 kbps (199999 kbps actual per interface, 399998 kbps total  
for LAG) burst 20 (20 actual per interface)
```

Queue	Maximum Bandwidth	Bandwidth Units	Burst (KB)

Q1	10082461	kbps	20
Q4	20164923	kbps	31
Q7	30247384	kbps	15

```
switch# show interface 1/1/49 qos
```

```
Interface 1/1/49 is up
```

```
Admin state is up
```

```
qos trust none (global)
```

```
qos queue-profile factory-default (global)
```

```
qos schedule-profile factory-default (global)
```

```
qos shape 10000000 kbps (10000000 kbps actual)
```

Command History

Release

Modification

10.07 or earlier

- -

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface queues

Syntax

```
show interface <INTERFACE-NAME> queues
```

Description

Displays interface-level queue statistics.

Parameter	Description
<INTERFACE-NAME>	Specifies the name of an Ethernet port or LAG on the switch. Format: member/slot/port or lag number .

Usage

Statistics include:

- **Tx Bytes:** Total bytes transmitted. The byte count may include packet headers and internal metadata that are removed before the packet is transmitted. Packet headers added when the packet is transmitted may not be included. The byte count includes any packets subsequently dropped by an egress ACL (6300 Series Switch only) .
- **Tx Packets:** Total packets transmitted. The count includes packets subsequently dropped by an egress ACL (6300 Series Switch only) .
- **Tx Drops:** Total packets dropped by an egress queue due to insufficient capacity.
- **Tx Drops:**For the 6300 Series Switch total packets dropped by an egress queue due to insufficient capacity. For the 6400 Series Switch sum of packets that were dropped across all line modules by Virtual

Output Queues (VOQs) destined for the egress port queue due to insufficient capacity. As the counts are read separately from each line module, the sum is not an instantaneous snapshot.

Examples

On the HPE Aruba Networking 6400 Switch Series, interface identification differs.

Showing queue statistics for interface **1/1/5**:

```
switch# show interface 1/1/5 queues
Interface 1/1/5 is down
Admin state is up
      Tx Bytes      Tx Packets      Tx Drops
Q0              0              0              3
Q1            15356             73              0
Q2              0              0              0
Q3              0              0              0
Q4              0              0              0
Q5              0              0              0
Q6              0              0              0
Q7              0              0              0
```

Showing queue statistics for interface **lag 1**:

```
switch# show interface lag 1 queues
Aggregate-name lag1
Aggregated-interfaces :
1/1/6 1/1/7
Speed 20000 Mb/s
      Tx Bytes      Tx Packets      Tx Drops
Q0              0              0              0
Q1              0              0              0
Q2              0              0              0
Q3              0              0              0
Q4              0              0              0
Q5              0              0              0
Q6              0              0              0
Q7            3450             25              0
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface queue-monitor

Syntax

```
show interface {<IFNAME>} queue-monitor
  histogram [filter [since <1-10000> days|hours|minutes|seconds] [type {queue-
    depth [slot <value>]}
    ]
  list [filter [since <1-10000> days|hours|minutes|seconds] [threshold {kbps
    <1-4294967295>}|{kbytes <1-4294967295>}|{packets <1-4294967295>}}] [type
    {queue-depth [slot <value>]}|
    ]] [slot <slot-id>]
  table [filter [threshold {kbps <1-4294967295>}|{kbytes <1-4294967295>}|
    {packets <1-4294967295>}}] [type {queue-depth [slot <value>]}
    ]]
```

Description

Display queue statistics history in the CLI as either a list or a histogram, or as a table, showing the previous five minutes of queue statistics history.

Parameter	Description
interface [<IFNAME>]	Specifies the name of an Ethernet port or LAG on the switch. If the optional <IFNAME> parameter is omitted, the output of this command displays all queue statistic data for all interfaces. Format: <MEMBER>/<SLOT>/<PORT> or lag <ID>
histogram list table	Specifies the output format for queue monitor output. • histogram - Queue statistics history is presented in histogram format for the last 8 hours.

Parameter	Description
	- list - Queue statistics history is presented in the list format for the last 8 hours - table - Queue statistics history is presented in tabular format for the last 5 minutes.
filter	The list format is able to display all of the collected queue statistics history data when no filters are applied. To limit the information displayed in the output of this command, use the filter parameters to filter the output to the format and data you require.
since <1-10000> days hours minutes seconds	Show events no older than a specified age, measured in seconds, days, hours or minutes.
type {queue-depth [slot <value>]}	Filter queue monitoring data by the specified filter type. If you do not specify a filter type, the type defaults to queue - depth. To see filtered output for other statistics types, you must specify the type. queue - depth: Show queue depth data. For chassis-based platforms such as 6400 switch series, include the optional slot <value> parameters to view queue depth for individual slots.
	 NOTE The slot < value > parameter is supported only on 6400 switches.
threshold {kbps kbytes packets <1-4294967295>}	Show data that exceeds a specified threshold in kilobytes, number of packets, or kilobits per second.

Examples

Displaying the queue statistics history data for all monitored interfaces in list format:

```
switch# show interface queue-monitor list
Time Range: 8 hours (2023-08-07 09:11:30 to 2023-08-08 17:11:30 (UTC+00:00))
Time           Interface Queue  Statistic           Value
-----
-----
2023-08-08 17:11:10 1/1/8    4      Queue Depth        12345 kbytes
2023-08-08 17:11:10 1/1/9    4      Queue Depth        5432 kbytes
2023-08-08 17:11:20 1/1/8    4      Queue Depth        12345 kbytes
2023-08-08 17:11:20 1/1/9    4      Queue Depth        5432 kbytes
```


2023-08-08 17:11:30	1/1/8	4	Queue Depth	12345 kbytes
2023-08-08 17:11:30	1/1/9	4	Queue Depth	5432 kbytes

The following example displays a portion of output of the **show interface 1/1/8 queue-monitor** command, showing queue statistics history data in tabular format for interface 1/1/8 with a min-depth of 2 kbytes.

```
switch# show interface 1/1/8 queue-monitor table min-depth kbytes 2
```

```
1/1/8 Statistics History
```

```
Collection Interval: 10 seconds
```

```
Time Range: 2023-08-08 17:07:00 to 2023-08-08 17:12:00 (UTC)
```

```
Min-Depth Filter: 2 KB
```

		Queue Depth - bytes					
Time (s)		Q0	Q1	Q2	Q3	Q4	Q5
Q6	Q7						

-300		-	-	-	-	-	-
-	-						
-295		-	-	-	-	-	-
-	-						
-290		-	-	-	-	-	-
-	-						
-285		-	-	-	-	-	-
-	-						
-280		-	-	-	-	-	-
-	-						
-275		-	-	-	-	-	-
-	-						
-270		-	-	-	-	-	-
-	-						
-265		-	-	-	-	-	-
-	-						
-260		-	-	-	-	-	-
-	-						
-255		-	-	-	-	-	-
-	-						
-250		-	2078	-	-	-	-
-	-						
-245		-	9914	-	-	-	-
-	-						
-240		-	171102	-	-	-	-
-	-						
-235		-	996262	-	-	-	-
-	-						
-230		-	5444	-	-	-	-

```

-          -
-225          -          -          -          -          -          -
-          -
-220          -          -          -          -          -          -
-          -
-215          -          -          -          -          -          -
-          -
-210          -          -          -          -          -          -
-          -
-205          -          -          -          -          -          -
-          -
-200          -          -          -          -          -          -
-          -
...

```

Displaying the queue statistics history data for interface 1/1/8 in histogram format.

```

switch(config)# show interface 1/1/8 queue-monitor histogram
1/1/8 Statistics History
Time Range: 2023-08-08 09:12:15 to 2023-08-08 17:12:15 (UTC)
Samples per Queue: 13

```

Depth (KB)	Count at Depth							
	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7
0	13	13	13	13	7	13	13	10
1-64	0	0	0	0	6	0	0	3
65-128	0	0	0	0	0	0	0	0
129-256	0	0	0	0	0	0	0	0
257-512	0	0	0	0	0	0	0	0
513-1024	0	0	0	0	0	0	0	0
1025-2048	0	0	0	0	0	0	0	0
2049-4096	0	0	0	0	0	0	0	0
4097-8192	0	0	0	0	0	0	0	0
8193-16384	0	0	0	0	0	0	0	0
16385-32768	0	0	0	0	0	0	0	0
32769-65536	0	0	0	0	0	0	0	0

Output of the global **show** command when queue monitoring is not enabled on any interfaces.

```

switch(config)# show interface queue-monitor list
Queue monitoring is not enabled on any interfaces.

```

Output of the **show** command when the interface requested does not have queue monitoring enabled.

```

switch(config)# show interface 1/1/8 queue-monitor table
Interface 1/1/8 does not have queue monitoring enabled.

```

Output of the global **show** command with the list presentation specified when there is no relevant data to show. Note: the table and histogram presentation formats output all enabled interface data.

```
switch(config)# show interface queue-monitor list
```

Enabled interfaces have not collected any data.

Output of the **show** command for an interface with the list presentation specified but there is no relevant data to show.

```
switch(config)# show interface 1/1/8 queue-monitor list
```

Interface 1/1/8 has not collected any data.

On a 6400v2 Switch series, the following command will display the queue statistics history data in list format for interface **1/3/1** on all the active Ingress slots.

```
switch# show interface 1/3/1 queue-monitor list
```

Interface Queue Congestion History

Time Range: 2024-12-06 02:23:59 to 2024-12-06 10:23:59 (UTC)

Sort: Time-ascending, Interface, Ingress-Slot, Queue

Min-Depth Filter: 1 KB

Time (B)	Interface	Ingress-Slot	Queue	Depth
-------------	-----------	--------------	-------	-------

--

2024-12-06 10:23:40	1/3/1	3	7	1154
2024-12-06 10:23:40	1/3/1	4	7	1086
2024-12-06 10:23:40	1/3/1	5	7	1103
2024-12-06 10:23:50	1/3/1	3	2	1207
2024-12-06 10:23:50	1/3/1	4	2	1238
2024-12-06 10:23:50	1/3/1	5	2	1420

On a 6400v2 Switch series, display the queue statistics history data in list format for interface **1/3/1** on Ingress slot **3**.

```
6400# show interface 1/3/1 queue-monitor list slot 3
```

Interface Queue Congestion History

Time Range: 2024-12-06 02:23:59 to 2024-12-06 10:23:59 (UTC)

Sort: Time-ascending, Interface, Ingress-Slot, Queue

Min-Depth Filter: 1 KB

Time (B)	Interface	Ingress-Slot	Queue	Depth
-------------	-----------	--------------	-------	-------

--

2024-12-06 10:23:40	1/3/1	3	7	1154
2024-12-06 10:23:50	1/3/1	3	2	1207

On a 6400v2 Switch series, display the queue statistics history data in tabular format for interface **1/4/3**.

```
6400(config)# show interface 1/4/3 queue-monitor table
```

Ingress Slot ID: 4

1/4/3 Congestion History

Collection Interval: 10 seconds

Time Range: 2024-10-30 10:31:10 to 2024-10-30 10:36:10 (UTC)

Min-Depth Filter: 1 KB

Queue Depth - bytes

Time (s)	Q0	Q1	Q2	Q3	Q4	Q5
----------	----	----	----	----	----	----

Q6	Q7
----	----

-300		-	-	-	-	-	-
-	-						
-290		-	-	-	-	-	-
-	-						
-280		-	-	-	-	-	-
-	-						
-270		-	-	-	-	-	-
-	-						
-260		-	-	-	-	-	-
-	-						
-250		-	-	-	-	-	-
-	-						
-240		-	-	-	-	-	-
-	-						
-230		-	-	-	-	-	-
-	-						
-220		-	-	-	-	-	-
-	-						
-210		-	-	-	-	-	-
-	-						
-200		-	27596	-	-	-	-
-	-						
-190		-	212172	-	-	-	-
-	-						
-180		-	458598	-	-	-	-
-	-						
-170		-	704870	-	-	-	-
-	-						
-160		-	951500	-	-	-	-
-	-						
-150		-	1197926	-	-	-	-
-	-						
-140		-	1444198	-	-	-	-
-	-						
-130		-	1690828	-	-	-	-
-	-						
-120		-	1937254	-	-	-	-

-	-						
-110		-	2183526	-	-	-	-
-	-						
-100		-	2429798	-	-	-	-
-	-						
-90		-	2676428	-	-	-	-
-	-						
-80		-	2922496	-	-	-	-
-	-						
-70		-	3168972	-	-	-	-
-	-						
-60		-	3415756	-	-	-	-
-	-						
-50		-	3662182	-	-	-	-
-	-						
-40		-	3908454	-	-	-	-
-	-						
-30		-	4154726	-	-	-	-
-	-						
-20		-	4400998	-	-	-	-
-	-						
-10		-	-	-	-	-	-
-	-						
Ingress Slot ID: 5							
1/4/3 Congestion History							
Collection Interval: 10 seconds							
Time Range: 2024-10-30 10:31:10 to 2024-10-30 10:36:10 (UTC)							
Min-Depth Filter: 1 KB							
Queue Depth - bytes							
Time (s)		Q0	Q1	Q2	Q3	Q4	Q5
Q6	Q7						

-300		-	-	-	-	-	-
-	-						
-290		-	-	-	-	-	-
-	-						
-280		-	-	-	-	-	-
-	-						
-270		-	-	-	-	-	-
-	-						
-260		-	-	-	-	-	-
-	-						

-250		-	-	-	-	-	-
-	-						
-240		-	-	-	-	-	-
-	-						
-230		-	-	-	-	-	-
-	-						
-220		-	-	-	-	-	-
-	-						
-210		-	-	-	-	-	-
-	-						
-200		-	27596	-	-	-	-
-	-						
-190		-	212172	-	-	-	-
-	-						
-180		-	458598	-	-	-	-
-	-						
-170		-	704870	-	-	-	-
-	-						
-160		-	951500	-	-	-	-
-	-						
-150		-	1197926	-	-	-	-
-	-						
-140		-	1444198	-	-	-	-
-	-						
-130		-	1690828	-	-	-	-
-	-						
-120		-	1937254	-	-	-	-
-	-						
-110		-	2183526	-	-	-	-
-	-						
-100		-	2429798	-	-	-	-
-	-						
-90		-	2676428	-	-	-	-
-	-						
-80		-	2922496	-	-	-	-
-	-						
-70		-	3168972	-	-	-	-
-	-						
-60		-	3415756	-	-	-	-
-	-						
-50		-	3662182	-	-	-	-
-	-						
-40		-	3908454	-	-	-	-

-	-						
-30		-	4154726	-	-	-	-
-	-						
-20		-	4400998	-	-	-	-
-	-						
-10		-	-	-	-	-	-
-	-						
Ingress Slot ID: 6							
1/4/3 Congestion History							
Collection Interval: 10 seconds							
Time Range: 2024-10-30 10:31:10 to 2024-10-30 10:36:10 (UTC)							
Min-Depth Filter: 1 KB							
Queue Depth - bytes							
Time (s)		Q0	Q1	Q2	Q3	Q4	Q5
Q6	Q7						

-300		-	-	-	-	-	-
-	-						
-290		-	-	-	-	-	-
-	-						
-280		-	-	-	-	-	-
-	-						
-270		-	-	-	-	-	-
-	-						
-260		-	-	-	-	-	-
-	-						
-250		-	-	-	-	-	-
-	-						
-240		-	-	-	-	-	-
-	-						
-230		-	-	-	-	-	-
-	-						
-220		-	-	-	-	-	-
-	-						
-210		-	-	-	-	-	-
-	-						
-200		-	27596	-	-	-	-
-	-						
-190		-	212172	-	-	-	-
-	-						
-180		-	458598	-	-	-	-
-	-						

-170	-	704870	-	-	-	-
-	-					
-160	-	951500	-	-	-	-
-	-					
-150	-	1197926	-	-	-	-
-	-					
-140	-	1444198	-	-	-	-
-	-					
-130	-	1690828	-	-	-	-
-	-					
-120	-	1937254	-	-	-	-
-	-					
-110	-	2183526	-	-	-	-
-	-					
-100	-	2429798	-	-	-	-
-	-					
-90	-	2676428	-	-	-	-
-	-					
-80	-	2922496	-	-	-	-
-	-					
-70	-	3168972	-	-	-	-
-	-					
-60	-	3415756	-	-	-	-
-	-					
-50	-	3662182	-	-	-	-
-	-					
-40	-	3908454	-	-	-	-
-	-					
-30	-	4154726	-	-	-	-
-	-					
-20	-	4400998	-	-	-	-
-	-					
-10	-	-	-	-	-	-
-	-					

On a 6400v2 Switch series, display the queue statistics history data in tabular format for interface **1/4/3** on Ingress slot **4**.

```

6400(config)# show interface 1/4/3 queue-monitor table slot 4
Ingress Slot ID: 4
1/4/3 Congestion History
Collection Interval: 10 seconds
Time Range: 2024-10-30 10:31:10 to 2024-10-30 10:36:10 (UTC)
Min-Depth Filter: 1 KB
Queue Depth - bytes

```


Time (s)	Q0	Q1	Q2	Q3	Q4	Q5
Q6	Q7					

-300		-	-	-	-	-
-	-					
-290		-	-	-	-	-
-	-					
-280		-	-	-	-	-
-	-					
-270		-	-	-	-	-
-	-					
-260		-	-	-	-	-
-	-					
-250		-	-	-	-	-
-	-					
-240		-	-	-	-	-
-	-					
-230		-	-	-	-	-
-	-					
-220		-	-	-	-	-
-	-					
-210		-	-	-	-	-
-	-					
-200		-	27596	-	-	-
-	-					
-190		-	212172	-	-	-
-	-					
-180		-	458598	-	-	-
-	-					
-170		-	704870	-	-	-
-	-					
-160		-	951500	-	-	-
-	-					
-150		-	1197926	-	-	-
-	-					
-140		-	1444198	-	-	-
-	-					
-130		-	1690828	-	-	-
-	-					
-120		-	1937254	-	-	-
-	-					
-110		-	2183526	-	-	-

-	-						
-100		-	2429798	-	-	-	-
-	-						
-90		-	2676428	-	-	-	-
-	-						
-80		-	2922496	-	-	-	-
-	-						
-70		-	3168972	-	-	-	-
-	-						
-60		-	3415756	-	-	-	-
-	-						
-50		-	3662182	-	-	-	-
-	-						
-40		-	3908454	-	-	-	-
-	-						
-30		-	4154726	-	-	-	-
-	-						
-20		-	4400998	-	-	-	-
-	-						
-10		-	-	-	-	-	-
-	-						

On a 6400v2 Switch series, display the queue statistics history data for interface **1/3/1** in histogram format on specified slot.

```
6400# show interface 1/3/1 queue-monitor histogram slot 3
Ingress Slot ID: 3
1/3/1 Congestion History
Time Range: 2024-12-06 02:59:19 to 2024-12-06 10:59:19 (UTC)
Samples per queue: 750
Count at Depth
Depth (KB)          Q0          Q1          Q2          Q3          Q4          Q5
Q6          Q7
-----
---
0              250          250          250          250          250          250          250
249
1-64              0           0           0           0           0           0
0          1
65-128            0           0           0           0           0           0
0          0
129-256           0           0           0           0           0           0
0          0
257-512           0           0           0           0           0           0
0          0
```

513-1024	0	0	0	0	0	0
0	0					
1025-2048	0	0	0	0	0	0
0	0					
2049-4096	0	0	0	0	0	0
0	0					
4097-8192	0	0	0	0	0	0
0	0					
8193-16384	0	0	0	0	0	0
0	0					
16385-32768	0	0	0	0	0	0
0						

On a 6400v2 Switch series, display the queue statistics history data for interface **1/3/1** in histogram format for all slots.

```

6400# show interface 1/3/1 queue-monitor histogram
Ingress Slot ID: 3
1/3/1 Congestion History
Time Range: 2024-12-06 02:59:19 to 2024-12-06 10:59:19 (UTC)
Samples per queue: 250

Count at Depth
Depth (KB)      Q0      Q1      Q2      Q3      Q4      Q5
Q6      Q7
-----
---
0          250      250      250      250      250      250      250
249
1-64          0        0        0        0        0        0
0          1
65-128         0        0        0        0        0        0
0          0
129-256         0        0        0        0        0        0
0          0
257-512         0        0        0        0        0        0
0          0
513-1024        0        0        0        0        0        0
0          0
1025-2048        0        0        0        0        0        0
0          0
2049-4096        0        0        0        0        0        0
0          0
4097-8192        0        0        0        0        0        0
0          0
8193-16384       0        0        0        0        0        0

```

0	0						
16385-32768		0	0	0	0	0	0
0	0						
32769-65536		0	0	0	0	0	0
0	0						
Ingress Slot ID: 4							
1/3/1 Congestion History							
Time Range: 2024-12-06 02:59:19 to 2024-12-06 10:59:19 (UTC)							
Samples per queue: 750							
Count at Depth							
Depth (KB)		Q0	Q1	Q2	Q3	Q4	Q5
Q6	Q7						

0		250	250	250	250	250	250
249							
1-64		0	0	0	0	0	0
0	1						
65-128		0	0	0	0	0	0
0	0						
129-256		0	0	0	0	0	0
0	0						
257-512		0	0	0	0	0	0
0	0						
513-1024		0	0	0	0	0	0
0	0						
1025-2048		0	0	0	0	0	0
0	0						
2049-4096		0	0	0	0	0	0
0	0						
4097-8192		0	0	0	0	0	0
0	0						
8193-16384		0	0	0	0	0	0
0	0						
16385-32768		0	0	0	0	0	0
0	0						
32769-65536		0	0	0	0	0	0
0	0						
Ingress Slot ID: 5							
1/3/1 Congestion History							
Time Range: 2024-12-06 02:59:19 to 2024-12-06 10:59:19 (UTC)							
Samples per queue: 750							
Count at Depth							

Depth (KB)	Q0	Q1	Q2	Q3	Q4	Q5	
Q6 Q7							

0	250	250	250	250	250	250	250
249							
1-64	0	0	0	0	0	0	
0 1							
65-128	0	0	0	0	0	0	
0 0							
129-256	0	0	0	0	0	0	
0 0							
257-512	0	0	0	0	0	0	
0 0							
513-1024	0	0	0	0	0	0	
0 0							
1025-2048	0	0	0	0	0	0	
0 0							
2049-4096	0	0	0	0	0	0	
0 0							
4097-8192	0	0	0	0	0	0	
0 0							
8193-16384	0	0	0	0	0	0	
0 0							
16385-32768	0	0	0	0	0	0	
0 0							
32769-65536	0	0	0	0	0	0	
0 0							

Related Commands

Command	Description
queue - monitor	This command enables the queue monitoring feature, allowing the switch to collect queue statistics at 10 - second time intervals. These aggregate statistics can be used to monitor network health, troubleshoot network issues, and identify normal network behavior patterns and performance anomalies. This feature is disabled by default, but can be enabled on a maximum of 52 interfaces per switch.

Command History

Release	Modification
10.17	Command introduced on 5420, 6200, 6300, and 6400v2 Switch series

Command Information

Platforms	Command context	Authority
5420 6200 (except f or JL724A, JL 725A, JL726A , JL727A, JL7 28A) 6300M/F (exc ept for JL658 A, JL659A, JL 660A, JL661A , JL662A, JL6 63A, JL664A, JL665A, JL66 6A, JL667A, J L668A, JL669 A, JL670A, JL 762A, JL761A , JL760A) 6400v2	Operator (>) or Manage r (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface queue-monitor status

Syntax

```
show interface {<IFNAME> | <IFRANGE>} queue-monitor status [vsx-peer]
```

Description

Displays the queue monitoring status for a specific interface or range of interfaces. If no interface is specified, the command will display the queue monitoring status for all interfaces configured.

Parameter	Description
{<IFNAME> <IFRANGE>}	Use the queue - monitor status parameters to show whether the feature is enabled or disabled, and information about memory consumption and monitored interfaces. Include the optional <IFNAME> parameter to filter the output of this command to show data for just the specified interface, or include both the <IFNAME> parameter and the additional <IFRANGE> parameter also to view data for a range of interfaces. If no interface is specified, the command will display the queue monitor status for all interfaces that have queue monitoring configured.
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Examples

Showing queue monitoring status for interface **1/1/1** when queue monitoring is not configured on that interface.

```
switch# show interface 1/1/1 queue-monitor status
Interface 1/1/1 does not have queue monitoring enabled.
```

Showing the queue monitoring status for interface **1/1/1** when queue monitoring is enabled on that interface.

```
switch# show interface 1/1/1 queue-monitor status
Interface 1/1/1
Status                : Enabled
Monitored Statistics  : queue-depth
```

Showing the queue monitoring status for a range of interfaces when queue monitoring is enabled on those interfaces.

```
switch# show interface 1/1/1-1/1/2 queue-monitor status
Interface 1/1/1
Status                : Enabled
Monitored Statistics  : queue-depth

Interface 1/1/2
Status                : Enabled
Monitored Statistics  : queue-depth
```

Showing the queue monitoring status for all interfaces that have queue monitoring enabled, but the interface does not support any statistics.

```
switch# show interface queue-monitor status
Interface 1/1/1
Status           : Blocked (No queue statistics supported for
monitoring)
Interface 1/1/2
Status           : Blocked (No queue statistics supported for
monitoring)
Interface 1/1/3 does not have queue monitoring enabled.
```

Showing the queue monitoring status for all interfaces where queue monitoring is enabled on interface **1/1/1**.

```
switch# show interface queue-monitor status
Interface 1/1/1
Status           : Enabled
Monitored Statistics : queue-depth

Interface 1/1/2 does not have queue monitoring enabled.
Interface 1/1/3 does not have queue monitoring enabled.
```

Showing the queue monitoring status for all interfaces when the feature pack is invalid and queue monitoring is configured only on interface **1/1/1**.

```
switch# show interface queue-monitor status
Interface 1/1/1
Status           : Blocked (Invalid feature pack)
Interface 1/1/2 does not have queue monitoring enabled.
Interface 1/1/3 does not have queue monitoring enabled.
```

Showing the queue monitoring status for interface **1/1/1** when the feature pack is invalid and queue monitoring is configured on that interface.

```
switch# show interface 1/1/1 queue-monitor status
Interface 1/1/1
Status           : Blocked (Invalid feature pack)
```

Command History

Release	Modification
10.17	Command introduced

Command Information

Platforms	Command context	Authority
5420 6200 (except f or JL724A, JL 725A, JL726A , JL727A, JL7 28A) 6300M/F (exc ept for JL658 A, JL659A, JL 660A, JL661A , JL662A, JL6 63A, JL664A, JL665A, JL66 6A, JL667A, J L668A, JL669 A, JL670A, JL 762A, JL761A , JL760A) 6400v2	Operator (>) or Manage r (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this c ommand from the operator context (>) only.

show qos cos-map

Syntax

```
show qos cos-map [default] [vsx-peer]
```



NOTE

The **vsx-peer** parameter is not supported by the 6300 Series Switch

Description

Shows the global QoS CoS code point settings, or the factory default settings.

Parameter	Description
default	Shows the factory default CoS code point settings.

Parameter	Description
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Examples

Showing the current CoS map:

```
switch# show qos cos-map
code_point local_priority color name
-----
0          2             green Best_Effort
1          0             green Background
2          1             green Spare
3          3             green Excellent_Effort
4          4             green Controlled_Load
5          5             green Video
6          6             green Voice
7          7             green Network_Control
```

Showing the default CoS map:

```
switch# show qos cos-map default
code_point local_priority color name
-----
0          1             green Best_Effort
1          0             green Background
2          2             green Excellent_Effort
3          3             green Critical_Applications
4          4             green Video
5          5             green Voice
6          6             green Internetwork_Control
7          7             green Network_Control
```

(Color is reserved for future use.)

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
5420 6200 6300 6400	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show qos dscp-map

Syntax

```
show qos dscp-map [default] [vsx-peer]
```



NOTE

The **vsx-peer** parameter is not supported by the 6300 Series Switch

Description

Displays the current or default global QoS dscp-map.

Parameter	Description
default	Shows the factory default DSCP code point settings.
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Examples

Showing the current QoS DSCP map:

```
switch# show qos dscp-map
code_point local_priority cos  color    name
-----
0           1              green  CS0
```

```

1      1      green
2      1      3  green
3      1      green
4      1      green
5      1      green
6      1      green
7      1      green
8      0      green  CS1
...
45     5      green
46     7      green  EF
47     5      7  green
48     6      green  CS6
...
61     7      green
62     7      green
63     7      green

```

Showing the default QoS DSCP map:

```

switch# show qos dscp-map default
code_point local_priority cos color  name
-----
0          1              green  CS0
1          1              green
2          1              green
3          1              green
4          1              green
5          1              green
...
45         5              green
46         5              green  EF
47         5              green
48         6              green  CS6
...
61         7              green
62         7              green
63         7              green

```

Command History

Release	Modification
---------	--------------

10.07 or earlier	- -
------------------	-----

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show qos queue-profile

Syntax

```
show qos queue-profile [<NAME> | factory-default] [vsx-peer]
```



NOTE

The **vsx-peer** parameter is not supported by the 6300 Series Switch

Description

Shows the status of all queue profiles, or a specific queue profile.

Parameter	Description
<NAME>	Specifies the name of a queue profile. Range 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).
[factory-default]	Specifies the factory default queue profile.
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Usage

The status of a queue profile can be:

- Applied - The profile is actively being used by the switch.
- Complete - The profile meets the criteria to be applied.

- Incomplete - The profile does not meet the criteria to be applied.

For a queue profile to be complete and ready to be applied:

- All eight cos values must be mapped to some queue.
- There can be only 2, 4, or 8 queues.
- The queues must be consecutively numbered starting at zero.
- All eight local priorities must be mapped to some queue.
- There can be 1 to 8 queues.
- The queues must be consecutively numbered starting at zero.
- All eight local priorities must be mapped to some queue.
- There can be 1 to 8 queues.
- All eight local priorities must be mapped to some queue.
- There must be 8 queues.

Examples

Showing the settings of the factory default queue profile:

```
switch# show qos queue-profile factory-default
```

```
queue_num cos name
```

```
-----
```

```
0          1
```

```
1          0
```

```
2          2
```

```
3          3
```

```
4          4
```

```
5          5
```

```
6          6
```

```
7          7
```

```
switch# show qos queue-profile factory-default
```

```
queue_num local_priorities name
```

```
-----
```

```
0          0
```

```
1          1
```

```
2          2
```

```
3          3
```

```
4          4
```

```
5          5
```

6	6
7	7

Command History

Release	Modification
---------	--------------

10.07 or earlier	- -
------------------	-----

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show qos schedule-profile

Syntax

```
show qos schedule-profile [<NAME> | factory-default | strict] [vsx-peer]
```



NOTE

The **vsx-peer** parameter is not supported by the 6300 Series Switch

Description

Shows the status of all schedule profiles, or a specific schedule profile.

Parameter	Description
<NAME>	Specifies the name of a queue or schedule profile. Range: 1 to 64 alphanumeric characters, including period (.), underscore (_), and hyphen (-).
[factory-default]	Specifies the factory default queue profile.

Parameter	Description
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Usage

The status of a schedule profile can be:

- Applied - The profile is actively being used by one or more ports.
- Complete - The profile meets the criteria to be applied.
- Incomplete - The profile does not meet the criteria to be applied.

For a schedule profile to be complete and ready to be applied it must have:

- An algorithm for each queue defined by the applied queue profile.
- All queues must use the same algorithm except for the highest numbered queue, which may be strict.

Example

Showing the status of all schedule profiles:

```
switch# show qos schedule-profile
profile_status profile_name
-----
applied        MySchedule
complete       factory-default
complete       Test
```

Showing the configuration of factory default schedule profile:

```
switch# show qos schedule-profile factory-default
Queue
Number  Algorithm      Percent  Maximum  Bandwidth
        Bandwidth  Units
-----
0        min-bandwidth  2
1        min-bandwidth  3
2        min-bandwidth 30
3        min-bandwidth 10
4        min-bandwidth 10
5        min-bandwidth 10
6        min-bandwidth 15
7        min-bandwidth 20
switch# show qos schedule-profile factory-default
Queue
```


Number	Algorithm	Weight
0	dwrr	1
1	dwrr	1
2	dwrr	1
3	dwrr	1
4	dwrr	1
5	dwrr	1
6	dwrr	1
7	dwrr	1

switch# **show qos schedule-profile factory-default**

Queue

Number	Algorithm	Weight
0	wfq	1
1	wfq	1
2	wfq	1
3	wfq	1
4	wfq	1
5	wfq	1
6	wfq	1
7	wfq	1

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show qos trust

Syntax

```
show qos trust [default] [vsx-peer]
```



NOTE

The **vsx-peer** parameter is not supported by the 6300 Series Switch

Description

Shows the global QoS trust settings, or the factory default settings.

Parameter	Description
default	Shows the factory default QoS trust settings.
vsx-peer	Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Examples

Showing the current QoS trust settings:

```
switch# show qos trust
qos trust cos
```

Showing the default QoS trust settings:

```
switch# show qos trust default
qos trust none
```

Command History

Release	Modification
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show qos tunnel

Syntax

```
show qos tunnel cos-dscp-map
```

Description

Displays the mapping of PCP to DSCP values used to populate the tunnel IP header when encapsulating non-IP packets.

Examples

Displays PCP to DSCP mapping for L2 traffic that gets encapsulated and sent over tunnels.

```
switch(config)# show qos tunnel cos-dscp-map
priority_code_point    dscp
-----
0                      0
1                      8
2                      16
3                      24
4                      32
5                      40
6                      48
7                      56
```

Command History

Release	Modification
10.16.1000	Command enabled on 6300, 8100 and 8360v2 Switch Series.

Command Information

Platforms	Command context	Authority
6300	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show queue-monitor status

Syntax

```
show queue-monitor status
```

Description

Displays the global state of the queue monitoring feature. The output includes the global enable/disable status, the memory consumed by the feature, the statistics being collected, and the interfaces currently enabled for monitoring.

Examples

Showing queue monitoring status when queue monitoring is not enabled on any interfaces.

```
switch# show queue-monitor status
Feature Status           : Running
Memory Consumption       : 0 kbytes
Monitored Interfaces/Max : 0/52
```

Showing the queue monitoring status when queue monitoring is enabled on interface **1/1/1**.

```
switch# show queue-monitor status
Feature Status           : Running
Memory Consumption       : 184 kbytes
Polling Interval         : 10 seconds
Data Retention Duration  : 8 hours
Monitored Interfaces/Max : 1/52
Monitored Interfaces     : 1/1/1
```

Related Commands

Command	Description
queue - monitor	This command enables the queue monitoring feature, allowing the switch to collect queue statistics at 10 - second time intervals. These aggregate statistics can be used to monitor network health, troubleshoot network issues, and identify normal network behavior patterns and performance anomalies. This feature is disabled by default, but can be enabled on a maximum of 52 interfaces per switch.

Command History

Release	Modification
10.17	Command introduced on 5420, 6200, 6300, and 6400v2 Switch series

Command Information

Platforms	Command context	Authority
5420 6200 (except f or JL724A, JL 725A, JL726A , JL727A, JL7 28A) 6300M/F (exc ept for JL658 A, JL659A, JL 660A, JL661A , JL662A, JL6 63A, JL664A, JL665A, JL66 6A, JL667A, J L668A, JL669 A, JL670A, JL 762A, JL761A , JL760A) 6400v2	Operator (>) or Manage r (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this c ommand from the operator context (>) only.

strict queue

Syntax

```
strict queue <0-7> [max-bandwidth <RATE> [kbps|percent]  
no strict queue <0-7> [max-bandwidth <RATE> [kbps|percent]
```

Description

Assigns the strict priority algorithm to a queue. Strict priority services all packets waiting in a queue, before servicing the packets in lower priority queues.

Egress queue shaping can be configured using the **max-bandwidth** option to limit the amount of traffic transmitted per output queue. The buffer associated with each egress queue stores the excess traffic to smooth the output rate. Sustained rates of traffic above the maximum bandwidth will eventually fill the output queue, causing tail drops. Use **show interface <IF-NAME> queues** to determine if any tail-drop errors have occurred.

The **no** form of this command removes the queue configuration from the schedule profile. To remove only egress queue shaping, re-enter the strict queue command without the **max-bandwidth** parameter.

Parameter	Description
<code><QUEUE-NUMBER></code>	Specifies the number of the queue. Range: 0 to 7.
<code>max-bandwidth <BANDWIDTH></code>	Specifies the maximum bandwidth allowed on the queue in Kbps. Range: 64 to 100000000. Alternatively, the maximum bandwidth rate can also be configured on the queue as a percentage of the port shape or link bandwidth if a port shape is not configured. The allowed range is 1 - 100.

Usage

Either all the queues of the schedule profile can be strict or just the highest numbered queue. When applied to a LAG, each member Ethernet port independently schedules its egress transmissions using the strict settings. Only limited changes can be made to a strict queue that is part of an applied schedule profile:

- The max-bandwidth settings.
- The highest numbered queue can be swapped between strict and dwrr or min-bandwidth (only applicable for the 6300 Series Switch)
- The highest numbered queue can be swapped between strict and dwrr (only applicable for the 6400 Series Switch)

Any other changes or removing a queue (**no strict queue**) will result in an unusable schedule profile. If that schedule profile is applied in the interface context, the switch will revert to the schedule profile applied in the global context until the profile is corrected. If that schedule profile is applied in the global context, the switch will revert to using the factory-default profile until the profile is corrected.

It is possible for the following errors to occur:

- **The max-bandwidth cannot be greater than 100 percent.**

This error occurs when a max-bandwidth value greater than 100 percent is configured on a queue.

- **The max-bandwidth cannot be less than < NUM > kbps.**

This error occurs when a kbps max-bandwidth value less than the supported minimum kbps shape value is configured on a queue. The supported minimum kbps shape value can be retrieved using the **show capacities** command.

Examples

Assigning strict priority to queue **7** in the schedule profile **MySchedule**:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)# strict queue 7
```

Deleting strict priority from queue **7** in the schedule profile **MySchedule**:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)# no strict queue 7
```

Assigning strict priority to queue **7** in the schedule profile **MySchedule** with a maximum bandwidth of 10000 Kbps:

```
switch(config)# qos schedule-profile MySchedule
switch(config-schedule)# strict queue 7 max-bandwidth 10000 kbps
```

Command History

Release	Modification
10.13	Added the kbps and percent parameters.
10.07 or earlier	- -

Command Information

Platforms	Command context	Authority
All platforms	config- schedule- <i><NAME></i>	Administrators or local user group members with execution rights for this command.

Feature and Proactive Troubleshooting

AOS-CX switches include an intelligent, intuitive and distributed troubleshooting framework that makes network troubleshooting simpler, inexpensive and efficient. Use the CLI commands in this section to troubleshoot individual features of AOS-CX software, or issue the **troubleshoot proactive** command to set up proactive system troubleshooting to automatically troubleshoot issues based on any of the following.

1. Events
2. Log messages
3. CoPP or other database changes
4. CPU levels exceeding a threshold
5. Memory exceeding a threshold
6. Daemon crashes



NOTE

Feature-specific troubleshooting information can also be viewed via the **Deepsheet > Troubleshoot** page of the Switch WebUI. For more details, refer to the latest WebUI Reference Guide for your switch model.

Subtopics

troubleshoot qos

troubleshoot qos

Syntax

```
troubleshoot qos
  cos-map
  health [verbose]
  queue-profile
  rate-limit
  schedule-profile
```

Description

Troubleshoot QoS features.

Parameter	Description
cos-map	Troubleshoot issues with Class of Service (CoS) maps,
health [verbose]	Display health information for QoS feature errors on the network, including the error message, message ID, severity level, and when the message was last reported. By default, the troubleshoot qos health command displays basic troubleshooting inform

Parameter	Description
	ation for all QoS features. Include the health parameter after a QoS feature name to display troubleshooting information for that feature only. Include the optional verbose keyword after the health parameter to display detailed diagnostic progress and confirm whether additional errors were suppressed.
queue-profile	Troubleshoot queue profile configuration issues.
rate-limit	Troubleshoot rate limiting and policing issues.
schedule-profile	Troubleshoot schedule profile configuration issues.

Examples

The following example indicates that there are no current issues with QoS features:

```
6300(config)# troubleshoot qos
-----
Basic-health troubleshoot
-----
No basic-health issues found

=====
Troubleshoot qos executed successfully
=====
```

Command History

Release	Modification
10.18	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

Support and Other Resources

Access HPE Aruba Networking support and updates, and view warranty and regulatory information

Subtopics

[Accessing HPE Aruba Networking Support](#)

[Accessing Updates](#)

[Warranty Information](#)

[Regulatory Information](#)

[Documentation Feedback](#)

Accessing HPE Aruba Networking Support

HPE Aruba Networking Support Services	<u>https://www.hpe.com/us/en/networking/hpe - aruba - networking - support - services.html</u>
AOS - CX Switch Software Documentation Portal	<u>https://arubanetworking.hpe.com/techdocs/ArubaDocPortal/content/new-portal/aoscx.html</u>
HPE Aruba Networking Support Portal	<u>https://networkingsupport.hpe.com/home</u>
North America telephone	1 - 800 - 943 - 4526 (US & Canada Toll - Free Number) +1 - 650 - 750 - 0350 (Backup—Toll Number)
International telephone	<u>https://www.hpe.com/psnow/doc/a50011948enw</u>

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs

- Add-on products or components
- Third-party products or components

Other useful sites

Other websites that can be used to find information:

HPE Aruba Networking Developer Hub	https://developer.arubanetworks.com/hpe - aruba - networking - aoscx/docs/about
Airheads social forums and Knowledge Base	https://community.arubanetworks.com/
AOS - CX Software Technical Update channel on YouTube.	Videos on new features introduced in this release : https://www.youtube.com/playlist?list=PLsYGHuNuBZcbWPEjjHuVMqP - Q_UL3CskS
HPE Aruba Networking Hardware Documentation and Translations Portal	
HPE Aruba Networking software	https://networkingsupport.hpe.com/downloads https://networkingsupport.hpe.com/downloads
Software licensing and Feature Packs	https://licensemanagement.hpe.com/
End - of - Life information	https://networkingsupport.hpe.com/end - of - life

Accessing Updates

You can access updates from the HPE Aruba Networking Support Portal at <https://networkingsupport.hpe.com>.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://networkingsupport.hpe.com/notifications/subscriptions> (requires an active HPE Aruba Networking Support Portal account to manage subscriptions). Security notices are viewable without an HPE Aruba Networking Support Portal account.

Warranty Information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Additional regulatory information

HPE Aruba Networking is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

Documentation Feedback

HPE Aruba Networking is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback-switching@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.