

AOS-CX 10.10 MPLS Guide

8360 Switch Series



Hewlett Packard
Enterprise

Published: June 2022

Version: 1

Copyright Information

© Copyright 2024 Hewlett Packard Enterprise Development LP.

This product includes code licensed under certain open source licenses which require source compliance. The corresponding source for these components is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, please check if the code is available in the HPE Software Center at <https://myenterpriselicense.hpe.com/cwp-ui/software> but, if not, send a written request for specific software version and product for which you want the open source code. Along with the request, please send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company
Attn: General Counsel
WW Corporate Headquarters
1701 E Mossy Oaks Rd Spring, TX 77389
United States of America.



Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Contents

About this document	6
Applicable products	6
Latest version available online	6
Command syntax notation conventions	6
About the examples	7
Identifying switch ports and interfaces	7
Overview	9
MPLS L3 VPN	9
Protocol and feature details	11
LDP and downstream label allocation	11
Label-based forwarding	11
MPLS L3 VPN forwarding	12
MPLS L3 VPN requirements and recommendations	13
MPLS L3 VPN QoS	13
MPLS L3 VPN traffic load balancing	14
Same CE AS	14
LDP packet capture	15
VPNv4 packet capture	15
Supported features and standards	17
Default behaviors	17
Supported features	17
Scale	17
Best practices	18
Supported RFCs and standards	19
Configuration task list	20
Configuring MPLS and LDP globally	20
Configuring MPLS and LDP on an interface	20
Configuring IBGP VPNv4 peering	20
Configuring VPN	21
Configuring EBGP peering between PE and CE	21
Use cases	23
Use case 1: MPLS L3 VPN with dual homed VSX CE	23
Use case 2: MPLS L3 VPN with hub and spoke VRFs	97
MPLS commands	141
bind ipv4 (lsp label imposition)	141
bind ipv4 input (static lsp binding)	143
clear mpls statistics	144
crossconnect input (static lsp binding label swap)	144
enable (mpls globally)	146
enable (mpls lsp)	147
enable (mpls static lsp)	148
enable mpls (interface)	149
mpls lsp graceful restart timers	150
label-range (static lsp)	152

label-protocol ldp	153
mpls	154
mpls ldp enable	154
mpls ldp entropy label insertion	155
mpls ldp discovery hello hold time (global)	156
mpls ldp discovery hello hold time (interface)	157
mpls ldp session holdtime (interface)	158
ping mpls	159
router-id (mpls ldp)	161
session hold time (mpls ldp globally)	163
show bgp vpnv4 unicast	164
show capacities mpls	169
show mpls forwarding	170
show mpls label-range static-lsp	172
show mpls ldp bindings	172
show mpls ldp discovery	173
show mpls ldp graceful-restart	174
show mpls ldp neighbor	175
static-lsp	176
traceroute mpls	177
Debugging and troubleshooting	179
Troubleshooting steps	180
Frequently asked questions	187
Support and Other Resources	189
Accessing Aruba Support	189
Accessing Updates	190
Warranty Information	190
Regulatory Information	190
Documentation Feedback	191

About this document

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing Aruba switches on a network.

Applicable products

This document applies to the following products:

- Aruba 8360 Switch Series (JL700A, JL701A, JL702A, JL703A, JL706A, JL707A, JL708A, JL709A, JL710A, JL711A, JL700C, JL701C, JL702C, JL703C, JL706C, JL707C, JL708C, JL709C, JL710C, JL711C, JL704C, JL705C, JL719C, JL718C, JL717C, JL720C, JL722C, JL721C)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in [Support and Other Resources](#).

Command syntax notation conventions

Convention	Usage
<code>example-text</code>	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example-text	In code and screen examples, indicates text entered by a user.
Any of the following: ■ <code><example-text></code> ■ <code><example-text></code> ■ <i>example-text</i> ■ <i>example-text</i>	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: ■ For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. ■ For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.

Convention	Usage
{ }	Braces. Indicates that at least one of the enclosed items is required.
[]	Brackets. Indicates that the enclosed item or items are optional.
... or ...	Ellipsis: ■ In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. ■ In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment.

The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term `switch`, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch(CONTEXT-NAME)#
```

Indicates the configuration context for a feature. For example:

```
switch(config-if)#
```

Identifies the interface context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch(config-vlan-100)#
```

When referring to this context, this document uses the syntax:

```
switch(config-vlan-<VLAN-ID>)#
```

Where `<VLAN-ID>` is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format:

```
member/slot/port
```

On the 83xx, 9300, and 10000 Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface 1/1/4 in software is associated with physical port 4 on the switch.



If using breakout cables, the port designation changes to x:y, where x is the physical port and y is the lane when split to 4 x 10G or 4 x 25G. For example, the logical interface 1/1/4:2 in software is associated with lane 2 on physical port 4 in slot 1 on member 1.

Overview

Multiprotocol Label Switching (MPLS) is a routing technique in telecommunications networks that directs data from one node to the next based on short path labels rather than long network addresses. The labels identify virtual links (paths) between distant nodes rather than endpoints. MPLS can encapsulate packets of various network protocols, hence the "multiprotocol" reference on its name.




Any features not explicitly mentioned in this document are not supported as of the 10.09 release.

MPLS switches are termed Label Switch Routers (LSRs).

1. At the ingress edge LSR, label imposition or label push is used to classify and label packets.
2. At the transit core LSR, label switching or label swapping is used to forward traffic based on labels instead of IP.
3. At the egress edge LSR, label disposition or label pop is used to remove labels and forward IP packets.

A unidirectional label switched path (LSP) is a chain of labels that are swapped at each hop to get from one LSR to another. Label Distribution Protocol (LDP) sessions are established between LSRs to distribute labels.


Penultimate Hop Popping (PHP) optimizes MPLS performance by reducing 1 less lookup at the egress edge LSR. With PHP, the egress edge LSR will just need to perform IP lookup instead of removing label and performing IP lookup. The figure below depicts the main MPLS concepts:

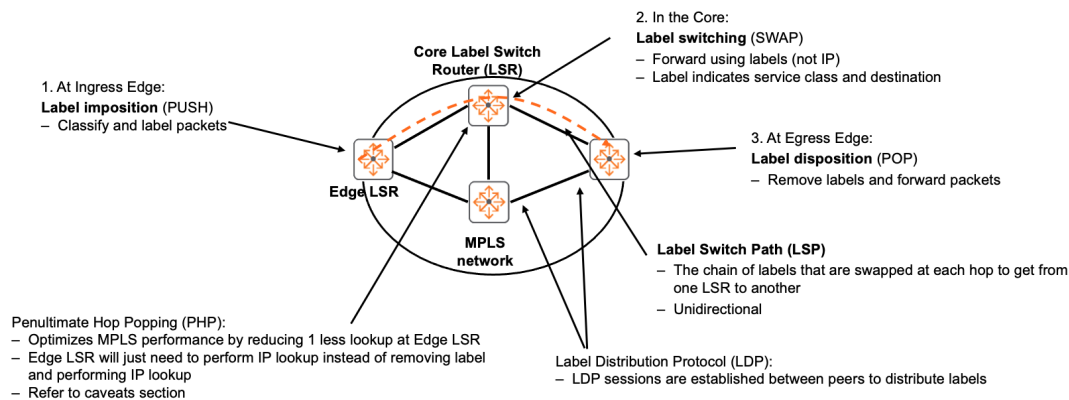

MPLS L3 VPN

MPLS L3 VPNs are deployed by service providers to provide L3 network connectivity and multi-tenant traffic isolation using an MPLS network.

In the figure below, the MPLS L3 VPN uses BGP Autonomous System (AS) 65001, CEs in Virtual Routing and Forwarding (VRF1) utilize AS 65101/65102, CEs in VRF2 utilize AS 65201/65202. VRF1 and VRF2 may utilize overlapping IP subnets if desired.

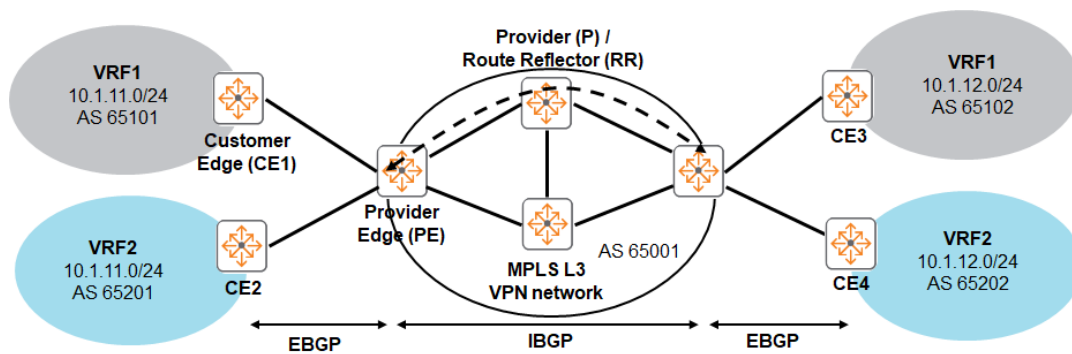

In this example, VRF1 consists of CE1 (LAN subnet 10.1.11.0/24) and CE3 (LAN subnet 10.1.12.0/24). VRF2 consists of CE2 (LAN subnet 10.1.11.0/24) and CE4 (LAN subnet 10.1.12.0/24). The Core LSR now functions as Provider (P) or Route Reflector (RR). The Edge LSR now functions as Provider Edge (PE). Customer Edge (CE) routers are not part of the MPLS L3VPN network but are attached to it. VRFs (without MPLS or VPNv4) could be enabled on CEs to provide locally significant L3 network isolation. Multi Protocol BGP (MP-BGP) is used between PE routers to exchange VPNv4 addresses, extended communities and labels. Full mesh IBGP peering is avoided within the MPLS L3 VPN network when P routers function as VPNv4 RR. PE would peer to dual RRs for redundancy.

Protocol and feature details

The following details provide additional information regarding the configuration of MPLS features.


LDP and downstream label allocation

LDP is used for downstream label allocation, Figure 3 describes this MPLS concept. Assuming 10.1.1.0/24 and 10.1.2.0/24 on the right are destination subnets.

From a right to left direction:

1. LSR3 informs LSR2 to use label 2001 for 10.1.1.0/24.
2. LSR4 informs LSR2 to use label 2002 for 10.1.2.0/24.
3. LSR2 will in turn inform LSR1 to use label 1001 for 10.1.1.0/24 and label 1002 for 10.1.2.0/24.

The figure below shows LDP and downstream label allocation:

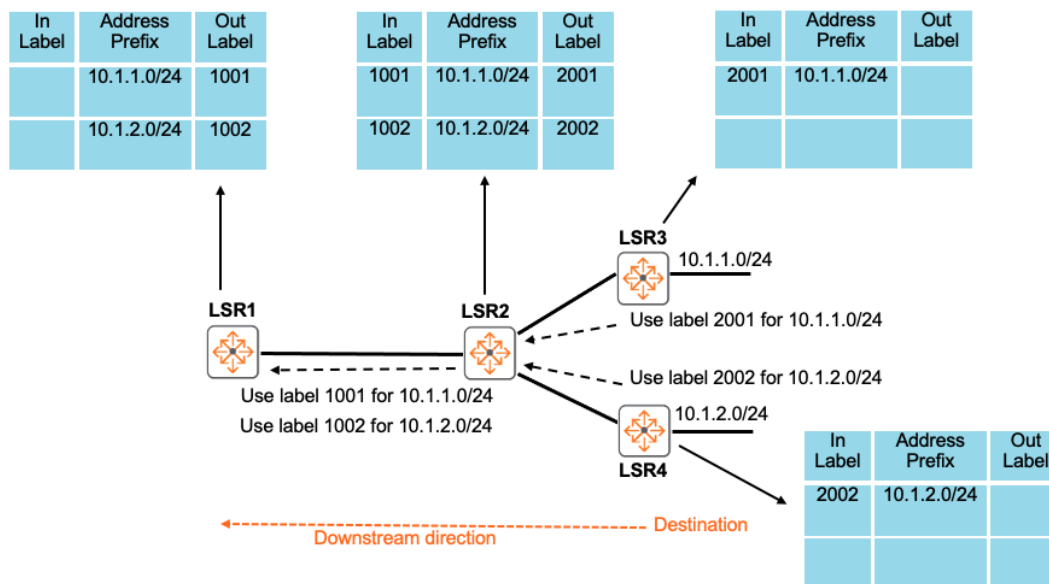


Label-based forwarding

Once the labels are allocated in the downstream direction, label based forwarding in the upstream direction is used next.

1. Data destined for 10.1.1.0/24 arrives at LSR1, LSR1 will refer to the MPLS label table and push 1001 into the packet towards LSR2.

2. LSR2 will receive the packet, see inbound label 1001, swap it with label 2001 and send it towards LSR3.
3. LSR3 will receive the packet, see inbound label 2001, pop it and send the packet using its IP routing table to the destination.

The figure shows label-based forwarding, from the left to right direction:

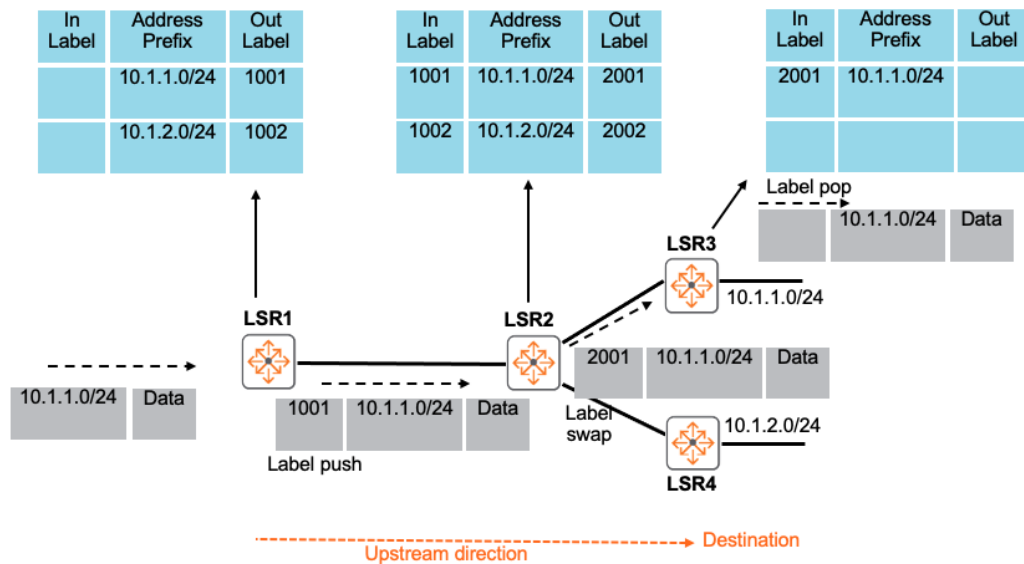


MPLS L3 VPN forwarding

MPLS L3 VPN requires a 2 label stack in order to forward traffic. The outer label (based on LDP) is used to forward traffic towards remote PE loopbacks, while the inner label (based on VPNv4) are used to forward traffic towards CE subnets.

1. Data destined for 10.1.1.0/24 arrives at PE1, PE1 will refer to the LDP, MPLS BGP VPNv4 tables and push both 43 (outer) and 2001 (inner) labels into the packet towards P2.
2. Because of PHP from PE3 to P2, P2 will receive the packet, see inbound label 43, remove outer LDP label and send it towards PE3.
3. PE3 will receive the packet with VPNv4 label, see inbound label 2001, pop it and send the packet using its IP routing table to the destination.

The figure below shows MPLS L3 VPN forwarding from the left to right direction:

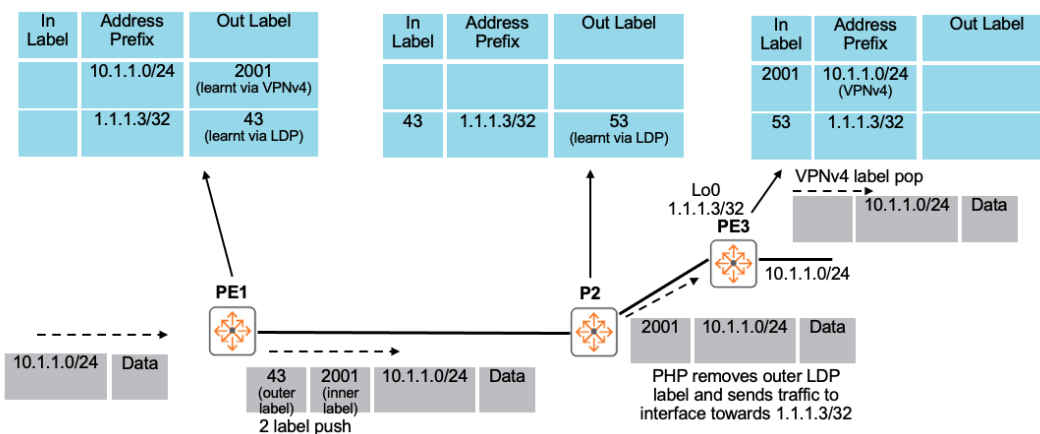


MPLS L3 VPN requirements and recommendations

MPLS L3 VPN has the following requirements:

- OSPF is required to exchange loopback IPs between PE/P
- LDP is required to exchange outer labels
- IBGP MP-BGP VPNv4 peering between PE/P(RR) loopbacks are used to exchange inner VPNv4 labels
- EBGP IPv4 peering is recommended between CE and PE

High availability recommendations:

- Dual standalone Ps
- Dual standalone RRs
- Dual standalone PEs for a site
- Dual CEs (could be VSX or 2 standalone switches)
- Redundant Equal Cost Multi Pathing (ECMP) links

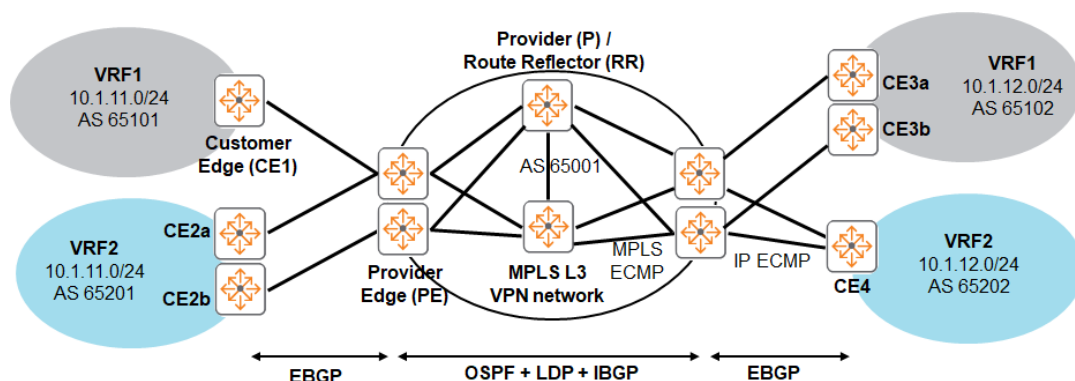

MPLS L3 VPN QoS

MPLS packets interact with Quality of Service features, such as queueing and scheduling. AOS-CX supports static Uniform mode queueing and remarking behavior as described below.

At tunnel entry, packets are prioritized and enqueued before entering the MPLS tunnel. Therefore, a device performing tunnel entry assigns a local priority and queue number to packets identically to non-MPLS packets: local priority is derived from both the packet's priority codepoints and the ingress port's QoS trust mode. Refer to the *Quality of Service Guide* for more information about trust mode and local-priority-to-queue mapping. When an IP packet enters an MPLS tunnel, the uppermost 3 bits of the DSCP field will be written into the egress packet's EXP value in the newly pushed MPLS header.

At MPLS transit and tunnel exit, packets are assigned a local priority equal to the EXP value of the incoming packet's outermost MPLS label. The COS and DSCP values of an incoming MPLS packet, and the trust mode of the ingress port, are ignored. EXP values are NOT subject to the CoS map or DSCP map applied on the system, but the local priority derived from the EXP value is still translated to a queue number through the queue profile applied on the system.


At tunnel exit, the device operates in Uniform mode. For IP packets, the EXP value from the popped MPLS label is written to the upper 3 bits of the DSCP field of the egress IP packet's header. The remaining bits of the DSCP field will be set to 0.

For MPLS Layer 3 Virtual Private Network (L3VPN), the protocols that are currently supported for communication between Customer Edge (CE) and Provider Edge (PE) are Open Shortest Path First

(OSPF) and Border Gateway Protocol (BGP). Routing Information Protocol(RIP) is not currently supported for communication between Customer Edge and Provider Edge.

MPLS L3 VPN supports QoS for congestion management. In the figure below implicit null/PHP is enabled on egress PE3 towards P2.

1. If CE1 sends traffic to PE1 with CS6 DSCP marking PE1 will automatically copy the CS6 DSCP marking to MPLS EXP 6 for both inner and outer labels
2. P2 will remove the outer label and forward traffic to interface towards PE3 with EXP 6 marking
3. PE3 will receive, pop the VPNv4 label and forward traffic with DSCP CS6

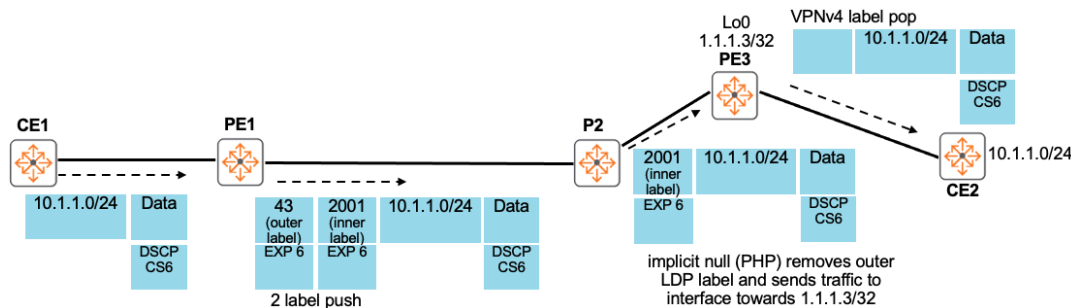


MPLS L3 VPN traffic load balancing

MPLS L3 VPN supports traffic load balancing via MPLS Equal Cost Multi Pathing (ECMP) across Link Aggregation Group (LAG) and links over multiple paths that have the same cost.


In the figure below, when ingress PE has 2 way ECMP towards egress PE loopback (2.2.2.2/32) via 2 intermediate P routers:

1. Traffic from ingress PE to egress PE will be load balanced across the links via the 2 P routers on a per flow basis
2. On ingress PE, some flows will use outbound label (2001) via top P router, while other flows will use outbound label (2002) via bottom P router

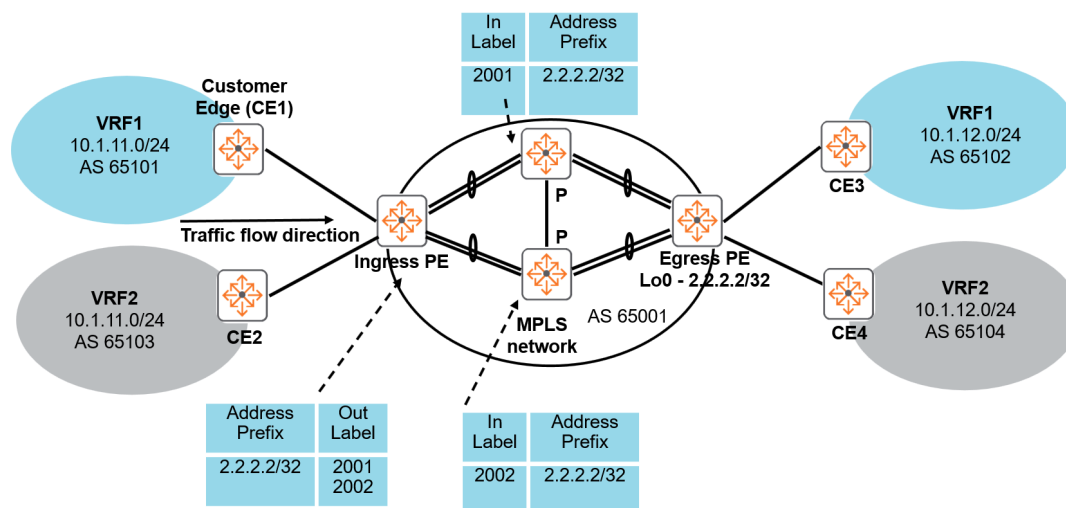

Same CE AS

CEs should be deployed using unique AS numbers to help identify which AS a route originates from, however it is possible to deploy the same CE AS as shown in the figure below, where VRF1 uses AS 65101 and VRF2 uses AS 65102. This is achieved by allowing the same inbound on the CE as a BGP router will (by default) drop routes from the same AS it is configured.

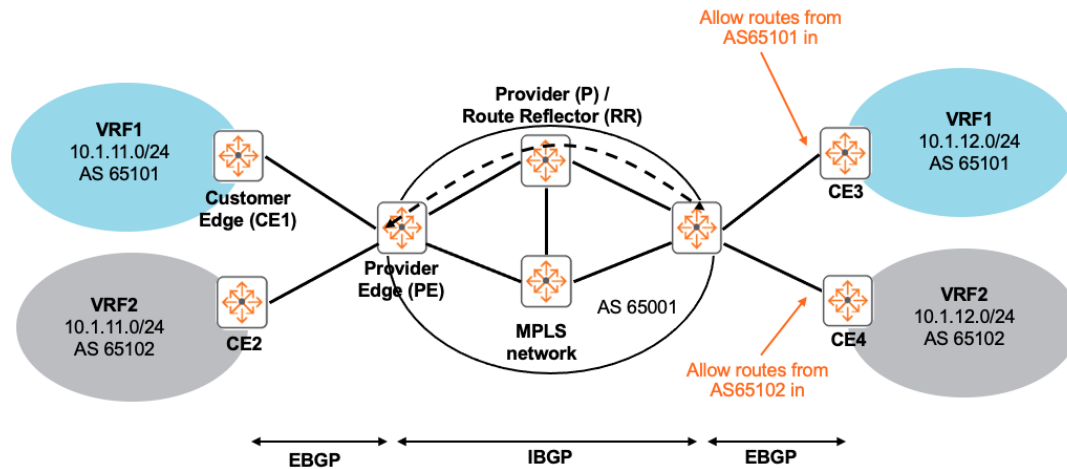

LDP packet capture

As shown in the figure below, a packet capture of LDP traffic between 2 LSRs is provided for reference. This example shows how a PE loopback IP of 2.2.2.2/32 is advertised with outer label of hex 0x12. Packet captures might be required if there is a need to troubleshoot LDP between 2 LSRs.

```

82 83.242435... 30.0.0.1 30.0.0.2 LDP 108 Label Mapping Message
...
Frame 82: 108 bytes on wire (864 bits), 108 bytes captured (864 bits) on interface \\.\pipe\Ethernet-003-D
Ethernet II, Src: ArubaaHe_5d:7a:80 (b8:d4:e7:5d:7a:80), Dst: ArubaaHe_5d:9a:00 (b8:d4:e7:5d:9a:00)
Internet Protocol Version 4, Src: 30.0.0.1, Dst: 30.0.0.2
Transmission Control Protocol, Src Port: 646, Dst Port: 57159, Seq: 455, Ack: 535, Len: 38
Label Distribution Protocol
  Version: 1
  PDU Length: 34
  LSR ID: 1.1.1.1
  Label Space ID: 0
  Label Mapping Message
    0... .... = U bit: Unknown bit not set
    Message Type: Label Mapping Message (0x400)
    Message Length: 24
    Message ID: 0x8000000b
  FEC
    00.. .... = TLV Unknown bits: Known TLV, do not Forward (0x0)
    TLV Type: FEC (0x100)
    TLV Length: 8
  FEC Elements
    FEC Element 1
      FEC Element Type: Prefix FEC (2)
      FEC Element Address Type: IPv4 (1)
      FEC Element Length: 32
      Prefix: 2.2.2.2
  Generic Label
    00.. .... = TLV Unknown bits: Known TLV, do not Forward (0x0)
    TLV Type: Generic Label (0x200)
    TLV Length: 4
    .... .... 0000 0000 0000 0001 0010 = Generic Label: 0x00012
  
```

2.2.2.2/32 loopback advertised with label (hex 0x12)

VPNv4 packet capture

As shown in the figure below, a packet capture of MP-BGP VPNv4 traffic between 2 PEs is provided for reference. This example shows how a VRF tenant subnet of 20.0.2.0/24 is advertised with inner label of decimal 22. Packet captures might be required if there is a need to troubleshoot VPNv4 labels between

2 PEs. CEs should be deployed using unique AS numbers to help identify which AS a route originates from, however it is possible to deploy duplicate CE AS as shown in Figure 10, where VRF1 uses AS 65101 and VRF2 uses AS 65102. This is achieved by allowing the same inbound on the CE, as a BGP router will (by default) drop routes from the same AS it is configured.

11	12.523021...	1.1.1.1	2.2.2.2	BGP	154 UPDATE Message
▶ Frame 11: 154 bytes on wire (1232 bits), 154 bytes captured (1232 bits) on interface \\.\pipe\Ethernet ▶ Ethernet II, Src: ArubaaHe_f1:d3:80 (8c:85:c1:f1:d3:80), Dst: ArubaaHe_f1:b3:00 (8c:85:c1:f1:b3:00) ▶ Internet Protocol Version 4, Src: 1.1.1.1, Dst: 2.2.2.2 ▶ Transmission Control Protocol, Src Port: 35147, Dst Port: 179, Seq: 20, Ack: 1, Len: 84 ▼ Border Gateway Protocol - UPDATE Message - Marker: ffffffffffffffffffffffffffffffff - Length: 84 - Type: UPDATE Message (2) - Withdrawn Routes Length: 0 - Total Path Attribute Length: 61 ▼ Path attributes ▶ Path Attribute - ORIGIN: INCOMPLETE ▶ Path Attribute - AS_PATH: empty ▶ Path Attribute - LOCAL_PREF: 100 ▶ Path Attribute - EXTENDED_COMMUNITIES ▼ Path Attribute - MP_REACH_NLRI ▶ Flags: 0x90, Optional, Extended-Length, Non-transitive, Complete - Type Code: MP_REACH_NLRI (14) - Length: 32 - Address family identifier (AFI): IPv4 (1) - Subsequent address family identifier (SAFI): Labeled VPN Unicast (128) ▶ Next hop network address (12 bytes) - Number of Subnetwork points of attachment (SNPA): 0 ▼ Network layer reachability information (15 bytes) ▼ BGP Prefix - Prefix Length: 112 - Label Stack: 22 (bottom) ← - Route Distinguisher: 1:1 - MP Reach NLRI IPv4 prefix: 20.0.2.0					

Tenant VRF 20.0.2.0/24 prefix advertised with label (decimal 22)

Supported features and standards

Default behaviors

- Default QoS mode: Uniform
- Default TTL propagation mode: Uniform
- Default egress label: Explicit null
- Per-VPN/VRF label

Supported features

- MPLS L3 VPN
 - IPv4 unicast
- Static LSP
- OSPF between P/RR and PE/P
- LDP between P/RR and PE/P
- MP-BGP VPNv4 RR on PE
- MP-BGP VPNv4 RR client on PE
- QoS uniform mode only
- Label bindings are supported with /32 address
 - E.g. if the network between P and PE is X.0.0.0/24 with an interface address of P as X.0.0.1/24 and address of PE as X.0.0.2/24, the LDP binding on PE for the X.0.0.0/24 network will be shown as X.0.0.1/32
- VRFs (intranet and extranet VRF with route leaking)
- Multi-VRF (VRF-Lite) CE
- PE-CE connectivity:
 - EBGp
 - Static route
 - Default route
 - Connected route (PE acting as an L3 first hop)
- Ping over MPLS networks
- Traceroute over MPLS networks

Scale

	Profile: Aggregation-Leaf (Default)	Profile: Core-Spine
Max VPNv4 VRFs/EBGP as PE-CE protocol	256	256
Max VPNv4 neighbors/Max dynamic LSPs	256	256
Max VPNv4 VRF routes	65,000	600,000
Max VPNv4 neighbors/Max routes	256 neighbors/32,000 routes	256 neighbors/600,000 routes
Max LDP neighbors	128	128
Max static LSP	4096	4096

Best practices

Recommended best practices for MPLS configuration are as follows:

- Use single area OSPF within the MPLS network to advertise and learn LSR loopbacks
- Use a single AS for the MPLS network
- Utilize EBGP between CE and PE for dynamic routing, use unique CE AS# if possible
- Use redundant VPNv4 RRs to avoid full mesh IBGP peers
- Use peer groups to simplify configs on both P/RR and PE

```
router bgp 65001
neighbor RR-client peer-group
neighbor RR-client remote-as 65001
neighbor RR-client description all RR clients
neighbor RR-client update-source loopback 0
neighbor 1.1.1.1 peer-group RR-client
neighbor 2.2.2.2 peer-group RR-client
address-family vpnv4 unicast
    neighbor RR-client route-reflector-client
    neighbor RR-client send-community both
    neighbor 1.1.1.1 activate
    neighbor 2.2.2.2 activate
```

- The `l3vpn-only` command should only be configured under the VRF context
- Implicit null is not supported, explicit null has to be configured on 3rd party egress PE towards AOS-CX P
- If egress PE and P are AOS-CX switches, changing it to explicit null is not required as explicit null is automatically sent

Supported RFCs and standards

The MPLS and MPLS L3 VPN implementation uses standards based protocols as described in the following RFCs:

- RFC 2547, BGP/MPLS VPNs
- RFC 3031, Multiprotocol Label Switching Architecture
- RFC 3032, MPLS Label Stack Encoding
- RFC 3036, LDP Specification
- RFC 3443, Time To Live (TTL) Processing in Multi-Protocol Label Switching (MPLS) Networks
- RFC 4182, Removing a Restriction on the use of MPLS Explicit NULL
- RFC 4364, BGP/MPLS IP Virtual Private Networks (VPNs)
- RFC 6388, Label Distribution Protocol Extensions for Point-to-Multipoint and Multipoint-to-Multipoint Label Switched Paths

Configuration task list

The following examples provide configuration steps to follow for basic MPLS configuration. For commands related to BGP configuration refer to the Border Gateway Protocol (BGP) chapter of the *IP Routing Guide*.

Configuring MPLS and LDP globally

Step	Command	Comments
1. Enter MPLS context	<code>mpls</code>	
2. Enable MPLS globally	<code>enable</code>	
3. Enter LDP context	<code>label-protocol ldp</code>	
4. Enable LDP globally	<code>enable</code>	
5. Specify loopback as LDP router-ID	<code>router-id <IP-ADDR></code>	Refer to the <i>IP Routing Guide</i> for command description.

Configuring MPLS and LDP on an interface

Step	Command	Comments
1. Enter desired interface	<code>interface <IFNAME></code>	Desired IP address and OSPF will also need to be added.
2. Enable MPLS	<code>mpls enable</code>	
3. Enable LDP	<code>mpls ldp enable</code>	

Configuring IBGP VPNv4 peering

Step	Command	Comments
1. Enter BGP context	<code>router bgp <AS-NUMBER></code>	

Step	Command	Comments
2. Specify remote BGP neighbor and remote AS	<code>neighbor <IP-ADDRESS> remote-as <AS-NUMBER></code>	The same AS number should be used between P/PE. OSPF should be enabled before BGP to advertise loopback IPs between LSRs.
3. Specify source IP/interface for IBGP peering	<code>neighbor <IP-ADDRESS> update-source loopback <NUMBER></code>	
4. Enter VPNv4 address family	<code>address-family vpnv4 unicast</code>	
5. Activate IBGP neighbor	<code>neighbor <IP-ADDRESS> activate</code>	
6. Send extended communities	<code>neighbor <IP-ADDRESS> send-community extended</code>	



The descriptions, syntax, and examples for the commands listed above can be found in the IP Routing Guide.

Configuring VPN

Step	Command	Comments
1. Create desired VRF	<code>vrf <VRF-NAME></code>	This command can be found in the IP Routing Guide.
2. Specify a unique RD per PE, per VRF	<code>rd number:number</code>	This command can be found in the VXLAN Guide.
3. Enable VPNv4 address family	<code>l3vpn-only</code>	<code>l3vpn-only</code> under VRF context is required for VPNv4 address family to be active.
4. Enter IPv4 unicast address family	<code>address-family ipv4 unicast</code>	This command can be found in the IP Routing Guide.
5. Specify desired route-target for export	<code>route-target export <AS-NUMBER:ID> <IP-ADDRESS:ID></code>	The <code>route target both number:number</code> command may also be used as an alternative. This command can be found in the VXLAN Guide.
6. Specify desired route-target for import	<code>route-target import <AS-NUMBER:ID> <IP-ADDRESS:ID></code>	

Configuring EBGP peering between PE and CE

Step	Command	Comments
1. Enter interface facing CE	<code>interface <IFNAME></code>	Desired IP address will also need to be added.

Step	Command	Comments
2. Attach VRF to interface	<code>vrf attach <VRF-NAME></code>	
3. Enter BGP context	<code>router bgp <AS-NUMBER></code>	
4. Enter desired VRF context	<code>vrf <VRF-NAME></code>	
5. Specify remote CE IP	<code>neighbor <IP-ADDRESS> remote-as <AS-NUMBER></code>	EBGP should be used between CE/PE with different AS .
6. Enter IPv4 unicast context for VRF	<code>address-family ipv4 unicast</code>	
7. Active the EBGP neighbor	<code>neighbor IP-address activate</code>	
8. Redistribute connected route to remote PEs and CEs	<code>redistribute connected</code>	Optional. Only required if connected routes need to be advertised.



The descriptions, syntax, and examples for the commands listed above can be found in the IP Routing Guide.

Use cases


The following use cases provide examples of networks using MPLS VPNs.

Use case 1: MPLS L3 VPN with dual homed VSX CE

This use case covers:

- An MPLS L3 VPN network with redundant PEs, Ps and VRFs across the MPLS network
- Redundant VSX CEs at Site1 and standalone CE at Site2 with locally significant VRFs
- BGP community is used inbound/outbound on PE1 and PE2 to prevent loops from Site1
- Sample configurations
- Relevant verification commands

MPLS L3 VPN with dual homed VSX CE diagram

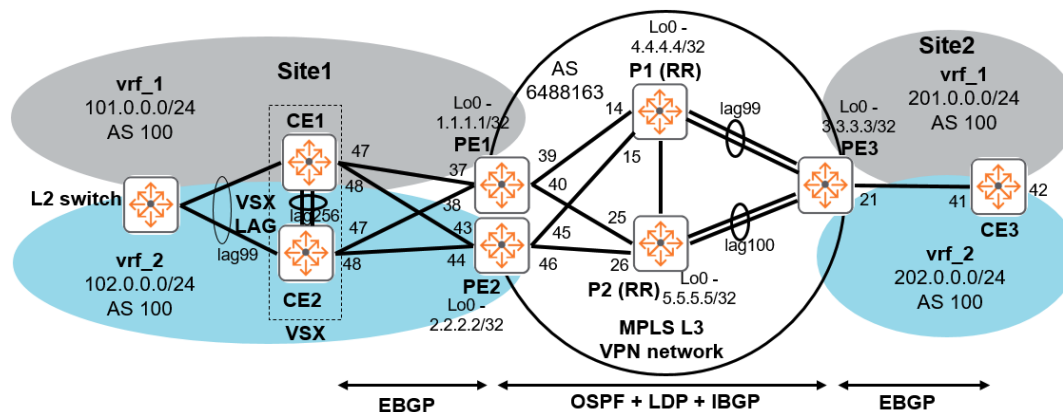

CE1 configuration

```
CE1# show running
Current configuration:
!
!Version ArubaOS-CX GL.10.09.0001BF
!export-password: default
hostname CE1
no ip icmp redirect
profile l3-core
logging console severity crit
vrf vrf_1
vrf vrf_2
cli-session
    timeout 0
!
!
```

```

!
!
!
ssh server vrf mgmt
vlan 1,2001-2002,2011-2012,2021-2022
interface mgmt
    no shutdown
    ip dhcp
system interface-group 1 speed 10g
    !interface group 1 contains ports 1/1/1-1/1/12
system interface-group 4 speed 10g
    !interface group 4 contains ports 1/1/37-1/1/48
interface lag 99 multi-chassis
    no shutdown
    description Towards L2SW
    no routing
    vlan trunk native 1
    vlan trunk allowed 2001-2002
    lacp mode active
interface lag 256
    no shutdown
    description Towards ISL
    no routing
    vlan trunk native 1 tag
    vlan trunk allowed all
    lacp mode active
interface 1/1/1
    no shutdown
    mtu 9000
    description Towards L2SW
    lag 99
interface 1/1/2
    no shutdown
    mtu 9000
    description Towards ISL
    lag 256
interface 1/1/3
    no shutdown
    mtu 9000
    description Towards ISL
    lag 256
interface 1/1/46
    no shutdown
    mtu 9000
    description Towards KA
    ip mtu 9000
    ip address 99.0.0.1/24
interface 1/1/47
    no shutdown
    mtu 9000
    description Towards PE1
    no routing
    vlan trunk native 1
    vlan trunk allowed 2011-2012
interface 1/1/48
    no shutdown
    mtu 9000
    description Towards PE2
    no routing
    vlan trunk native 1
    vlan trunk allowed 2021-2022
interface vlan 2001

```

```

vrf attach vrf_1
description Towards LAN
ip mtu 9000
vsx active-forwarding
ip address 20.0.1.2/24
interface vlan 2002
vrf attach vrf_2
description Towards LAN
ip mtu 9000
vsx active-forwarding
ip address 20.0.1.2/24
interface vlan 2011
vrf attach vrf_1
description Towards PE1
ip mtu 9000
ip address 20.1.1.1/24
interface vlan 2012
vrf attach vrf_2
description Towards PE1
ip mtu 9000
ip address 20.1.1.1/24
interface vlan 2021
vrf attach vrf_1
description Towards PE2
ip mtu 9000
ip address 20.2.1.1/24
interface vlan 2022
vrf attach vrf_2
description Towards PE2
ip mtu 9000
ip address 20.2.1.1/24
vsx
inter-switch-link lag 256
role primary
keepalive peer 99.0.0.2 source 99.0.0.1
!
!
!
!
!
router bgp 100
!
vrf vrf_1
neighbor 20.0.1.1 remote-as 100
neighbor 20.0.1.1 description Towards LAN
neighbor 20.0.1.3 remote-as 100
neighbor 20.0.1.3 description Towards CE2
neighbor 20.1.1.2 remote-as 6488163
neighbor 20.1.1.2 description Towards PE1
neighbor 20.2.1.2 remote-as 6488163
neighbor 20.2.1.2 description Towards PE2
address-family ipv4 unicast
neighbor 20.0.1.1 activate
neighbor 20.0.1.1 next-hop-self
neighbor 20.0.1.1 send-community both
neighbor 20.0.1.1 soft-reconfiguration inbound
neighbor 20.0.1.3 activate
neighbor 20.0.1.3 allowas-in 1
neighbor 20.0.1.3 next-hop-self
neighbor 20.0.1.3 send-community both
neighbor 20.0.1.3 soft-reconfiguration inbound
neighbor 20.1.1.2 activate

```

```

        neighbor 20.1.1.2 allowas-in 1
        neighbor 20.1.1.2 send-community both
        neighbor 20.1.1.2 soft-reconfiguration inbound
        neighbor 20.2.1.2 activate
        neighbor 20.2.1.2 allowas-in 1
        neighbor 20.2.1.2 send-community both
        neighbor 20.2.1.2 soft-reconfiguration inbound
    exit-address-family
!
vrf vrf_2
    neighbor 20.0.1.1 remote-as 100
    neighbor 20.0.1.1 description Towards LAN
    neighbor 20.0.1.3 remote-as 100
    neighbor 20.0.1.3 description Towards CE2
    neighbor 20.1.1.2 remote-as 6488163
    neighbor 20.1.1.2 description Towards PE1
    neighbor 20.2.1.2 remote-as 6488163
    neighbor 20.2.1.2 description Towards PE2
    address-family ipv4 unicast
        neighbor 20.0.1.1 activate
        neighbor 20.0.1.1 next-hop-self
        neighbor 20.0.1.1 send-community both
        neighbor 20.0.1.1 soft-reconfiguration inbound
        neighbor 20.0.1.3 activate
        neighbor 20.0.1.3 allowas-in 1
        neighbor 20.0.1.3 next-hop-self
        neighbor 20.0.1.3 send-community both
        neighbor 20.0.1.3 soft-reconfiguration inbound
        neighbor 20.1.1.2 activate
        neighbor 20.1.1.2 allowas-in 1
        neighbor 20.1.1.2 send-community both
        neighbor 20.1.1.2 soft-reconfiguration inbound
        neighbor 20.2.1.2 activate
        neighbor 20.2.1.2 allowas-in 1
        neighbor 20.2.1.2 send-community both
        neighbor 20.2.1.2 soft-reconfiguration inbound
    exit-address-family
!
https-server vrf mgmt

```

CE1 verification

```

CE1# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 99.0.0.1
Peers              : 0             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----

Address-family : IPv6 Unicast
-----

Address-family : L2VPN EVPN
-----

```

```

VRF : vrf_1
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 20.2.1.1
Peers              : 4             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.1      100          56      63      00h:26m:24s Established Up
20.0.1.3      100          37      36      00h:29m:13s Established Up
20.1.1.2      6488163      37      36      00h:28m:34s Established Up
20.2.1.2      6488163      35      35      00h:28m:01s Established Up

Address-family : IPv6 Unicast
-----

VRF : vrf_2
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 20.2.1.1
Peers              : 4             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.1      100          58      65      00h:26m:25s Established Up
20.0.1.3      100          38      38      00h:29m:18s Established Up
20.1.1.2      6488163      37      40      00h:28m:33s Established Up
20.2.1.2      6488163      38      38      00h:27m:57s Established Up

Address-family : IPv6 Unicast
-----

```

```

CE1# show bgp all-vrf all
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
              i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 99.0.0.1

Address-family : IPv4 Unicast
-----
Network          Nexthop          Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : IPv6 Unicast
-----
Network          Nexthop          Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : L2VPN EVPN
-----
Network          Nexthop          Metric

```

```

      LocPrf    Weight    Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.2.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
*>i 101.0.0.0/24    20.0.1.1      0           0           0       i
* i 201.0.0.0/24    20.0.1.3      0          100          0      6488163 100 i
*>e 201.0.0.0/24    20.1.1.2      0          100          0      6488163 100 i
*=e 201.0.0.0/24    20.2.1.2      0          100          0      6488163 100 i
Total number of entries 4

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.2.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
*>i 102.0.0.0/24    20.0.1.1      0           0           0       i
* i 202.0.0.0/24    20.0.1.3      0          100          0      6488163 100 i
*=e 202.0.0.0/24    20.1.1.2      0          100          0      6488163 100 i
*>e 202.0.0.0/24    20.2.1.2      0          100          0      6488163 100 i
Total number of entries 4

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

```

CE1# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: default

```

Prefix      Nexthop      Interface      VRF(egress)      Origin/
Distance/   Age
-----
99.0.0.0/24      -           1/1/46          -                  C
[0/0]           -
99.0.0.1/32      -           1/1/46          -                  L
[0/0]           -

```

VRF: vrf_1

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.0.1.0/24	-	-	vlan2001	-	C	
[0/0]	-	-				
20.0.1.2/32	-	-	vlan2001	-	L	
[0/0]	-	-				
20.1.1.0/24	-	-	vlan2011	-	C	
[0/0]	-	-				
20.1.1.1/32	-	-	vlan2011	-	L	
[0/0]	-	-				
20.2.1.0/24	-	-	vlan2021	-	C	
[0/0]	-	-				
20.2.1.1/32	-	-	vlan2021	-	L	
[0/0]	-	-				
101.0.0.0/24		20.0.1.1	vlan2001	-	B/I	
[200/0]	01h:11m:54s					
201.0.0.0/24		20.1.1.2	vlan2011	-	B/E	
[20/0]	01h:10m:33s					
		20.2.1.2	vlan2021	-		
[20/0]	01h:10m:33s					

VRF: vrf_2

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.0.1.0/24	-	-	vlan2002	-	C	
[0/0]	-	-				
20.0.1.2/32	-	-	vlan2002	-	L	
[0/0]	-	-				
20.1.1.0/24	-	-	vlan2012	-	C	
[0/0]	-	-				
20.1.1.1/32	-	-	vlan2012	-	L	
[0/0]	-	-				
20.2.1.0/24	-	-	vlan2022	-	C	
[0/0]	-	-				
20.2.1.1/32	-	-	vlan2022	-	L	
[0/0]	-	-				
102.0.0.0/24		20.0.1.1	vlan2002	-	B/I	
[200/0]	00h:54m:05s					
202.0.0.0/24		20.2.1.2	vlan2022	-	B/E	
[20/0]	00h:54m:05s					
		20.1.1.2	vlan2012	-		
[20/0]	00h:54m:05s					

Total Route Count : 18

CE2 configuration

```
CE2# show running
Current configuration:
!
!Version ArubaOS-CX GL.10.09.0001BF
```

```

!export-password: default
hostname CE2
no ip icmp redirect
profile l3-core
logging console severity crit
vrf vrf_1
vrf vrf_2
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2001-2002,2031-2032,2041-2042
interface mgmt
    no shutdown
    ip dhcp
system interface-group 1 speed 10g
    !interface group 1 contains ports 1/1/1-1/1/12
system interface-group 4 speed 10g
    !interface group 4 contains ports 1/1/37-1/1/48
interface lag 99 multi-chassis
    no shutdown
    description Towards L2SW
    no routing
    vlan trunk native 1
    vlan trunk allowed 2001-2002
    lacp mode active
interface lag 256
    no shutdown
    description Towards ISL
    no routing
    vlan trunk native 1 tag
    vlan trunk allowed all
    lacp mode active
interface 1/1/1
    no shutdown
    mtu 9000
    description Towards L2SW
    lag 99
interface 1/1/2
    no shutdown
    mtu 9000
    description Towards ISL
    lag 256
interface 1/1/3
    no shutdown
    mtu 9000
    description Towards ISL
    lag 256
interface 1/1/46
    no shutdown
    mtu 9000
    description Towards KA
    ip mtu 9000
    ip address 99.0.0.2/24
interface 1/1/47
    no shutdown
    mtu 9000
    description Towards PE1

```

```

    no routing
    vlan trunk native 1
    vlan trunk allowed 2031-2032
interface 1/1/48
    no shutdown
    mtu 9000
    description Towards PE2
    no routing
    vlan trunk native 1
    vlan trunk allowed 2041-2042
interface vlan 2001
    vrf attach vrf_1
    description Towards LAN
    ip mtu 9000
    vsx active-forwarding
    ip address 20.0.1.3/24
interface vlan 2002
    vrf attach vrf_2
    description Towards LAN
    ip mtu 9000
    vsx active-forwarding
    ip address 20.0.1.3/24
interface vlan 2031
    vrf attach vrf_1
    description Towards PE1
    ip mtu 9000
    ip address 20.3.1.1/24
interface vlan 2032
    vrf attach vrf_2
    description Towards PE1
    ip mtu 9000
    ip address 20.3.1.1/24
interface vlan 2041
    vrf attach vrf_1
    description Towards PE2
    ip mtu 9000
    ip address 20.4.1.1/24
interface vlan 2042
    vrf attach vrf_2
    description Towards PE2
    ip mtu 9000
    ip address 20.4.1.1/24
vsx
    inter-switch-link lag 256
    role secondary
    keepalive peer 99.0.0.1 source 99.0.0.2
!
!
!
!
!
router bgp 100
!
    vrf vrf_1
        neighbor 20.0.1.1 remote-as 100
        neighbor 20.0.1.1 description Towards LAN
        neighbor 20.0.1.2 remote-as 100
        neighbor 20.0.1.2 description Towards CE1
        neighbor 20.3.1.2 remote-as 6488163
        neighbor 20.3.1.2 description Towards PE1
        neighbor 20.4.1.2 remote-as 6488163
        neighbor 20.4.1.2 description Towards PE2

```

```

    address-family ipv4 unicast
      neighbor 20.0.1.1 activate
      neighbor 20.0.1.1 next-hop-self
      neighbor 20.0.1.1 send-community both
      neighbor 20.0.1.1 soft-reconfiguration inbound
      neighbor 20.0.1.2 activate
      neighbor 20.0.1.2 allowas-in 1
      neighbor 20.0.1.2 next-hop-self
      neighbor 20.0.1.2 send-community both
      neighbor 20.0.1.2 soft-reconfiguration inbound
      neighbor 20.3.1.2 activate
      neighbor 20.3.1.2 allowas-in 1
      neighbor 20.3.1.2 send-community both
      neighbor 20.3.1.2 soft-reconfiguration inbound
      neighbor 20.4.1.2 activate
      neighbor 20.4.1.2 allowas-in 1
      neighbor 20.4.1.2 send-community both
      neighbor 20.4.1.2 soft-reconfiguration inbound
    exit-address-family
  !
vrf vrf_2
  neighbor 20.0.1.1 remote-as 100
  neighbor 20.0.1.1 description Towards LAN
  neighbor 20.0.1.2 remote-as 100
  neighbor 20.0.1.2 description Towards CE1
  neighbor 20.3.1.2 remote-as 6488163
  neighbor 20.3.1.2 description Towards PE1
  neighbor 20.4.1.2 remote-as 6488163
  neighbor 20.4.1.2 description Towards PE2
  address-family ipv4 unicast
    neighbor 20.0.1.1 activate
    neighbor 20.0.1.1 next-hop-self
    neighbor 20.0.1.1 send-community both
    neighbor 20.0.1.1 soft-reconfiguration inbound
    neighbor 20.0.1.2 activate
    neighbor 20.0.1.2 allowas-in 1
    neighbor 20.0.1.2 next-hop-self
    neighbor 20.0.1.2 send-community both
    neighbor 20.0.1.2 soft-reconfiguration inbound
    neighbor 20.3.1.2 activate
    neighbor 20.3.1.2 allowas-in 1
    neighbor 20.3.1.2 send-community both
    neighbor 20.3.1.2 soft-reconfiguration inbound
    neighbor 20.4.1.2 activate
    neighbor 20.4.1.2 allowas-in 1
    neighbor 20.4.1.2 send-community both
    neighbor 20.4.1.2 soft-reconfiguration inbound
  exit-address-family
!
https-server vrf mgmt

```

CE2 verification

```

CE2# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 99.0.0.2
Peers              : 0             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60

```

```

Confederation Id      : 0

Address-family : IPv4 Unicast
-----

Address-family : IPv6 Unicast
-----

Address-family : L2VPN EVPN
-----

VRF : vrf_1
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 20.4.1.1
Peers              : 4             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor          Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.1          100        56      65      00h:26m:24s Established Up
20.0.1.2          100        36      37      00h:29m:13s Established Up
20.3.1.2          6488163    36      36      00h:28m:34s Established Up
20.4.1.2          6488163    35      35      00h:27m:58s Established Up

Address-family : IPv6 Unicast
-----

VRF : vrf_2
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : 20.4.1.1
Peers              : 4             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor          Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.1          100        58      65      00h:26m:25s Established Up
20.0.1.2          100        38      38      00h:29m:18s Established Up
20.3.1.2          6488163    38      40      00h:28m:43s Established Up
20.4.1.2          6488163    37      38      00h:27m:56s Established Up

Address-family : IPv6 Unicast
-----

```

```

CE2# show bgp all-vrf all
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 99.0.0.2

Address-family : IPv4 Unicast
-----

```

```

      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : L2VPN EVPN
-----
      Network      Nexthop      Metric
      LocPrf      Weight      Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.4.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
*>i 101.0.0.0/24      20.0.1.1      0      0      0      i
* i 201.0.0.0/24      20.0.1.2      0      100      0      6488163 100 i
*>e 201.0.0.0/24      20.3.1.2      0      100      0      6488163 100 i
*=e 201.0.0.0/24      20.4.1.2      0      100      0      6488163 100 i
Total number of entries 4

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.4.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
*>i 102.0.0.0/24      20.0.1.1      0      0      0      i
* i 202.0.0.0/24      20.0.1.2      0      100      0      6488163 100 i
*=e 202.0.0.0/24      20.3.1.2      0      100      0      6488163 100 i
*>e 202.0.0.0/24      20.4.1.2      0      100      0      6488163 100 i
Total number of entries 4

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

```

CE2# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
IA - OSPF internal area, E1 - OSPF external type 1
E2 - OSPF external type 2

VRF: default

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

99.0.0.0/24	-	-	1/1/46	-	C	
[0/0]	-	-				
99.0.0.2/32	-	-	1/1/46	-	L	
[0/0]	-	-				
VRF: vrf_1						
Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.0.1.0/24	-	-	vlan2001	-	C	
[0/0]	-	-				
20.0.1.3/32	-	-	vlan2001	-	L	
[0/0]	-	-				
20.3.1.0/24	-	-	vlan2031	-	C	
[0/0]	-	-				
20.3.1.1/32	-	-	vlan2031	-	L	
[0/0]	-	-				
20.4.1.0/24	-	-	vlan2041	-	C	
[0/0]	-	-				
20.4.1.1/32	-	-	vlan2041	-	L	
[0/0]	-	-				
101.0.0.0/24		20.0.1.1	vlan2001	-	B/I	
[200/0]	01h:11m:55s					
201.0.0.0/24		20.4.1.2	vlan2041	-	B/E	
[20/0]	01h:10m:34s					
		20.3.1.2	vlan2031	-		
[20/0]	01h:10m:34s					
VRF: vrf_2						
Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.0.1.0/24	-	-	vlan2002	-	C	
[0/0]	-	-				
20.0.1.3/32	-	-	vlan2002	-	L	
[0/0]	-	-				
20.3.1.0/24	-	-	vlan2032	-	C	
[0/0]	-	-				
20.3.1.1/32	-	-	vlan2032	-	L	
[0/0]	-	-				
20.4.1.0/24	-	-	vlan2042	-	C	
[0/0]	-	-				
20.4.1.1/32	-	-	vlan2042	-	L	
[0/0]	-	-				
102.0.0.0/24		20.0.1.1	vlan2002	-	B/I	
[200/0]	00h:54m:06s					
202.0.0.0/24		20.4.1.2	vlan2042	-	B/E	
[20/0]	00h:54m:06s					
		20.3.1.2	vlan2032	-		
[20/0]	00h:54m:06s					

Total Route Count : 18

CE3 configuration

```
CE3# show running
Current configuration:
!
!Version ArubaOS-CX GL.10.09.0001BF
!export-password: default
hostname CE3
profile l3-core
logging console severity crit
vrf vrf_1
vrf vrf_2
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2051-2052,2061-2062
interface mgmt
    no shutdown
    ip dhcp
system interface-group 4 speed 10g
    !interface group 4 contains ports 1/1/37-1/1/48
interface 1/1/41
    no shutdown
    mtu 9000
    description Towards PE3
    no routing
    vlan trunk native 1
    vlan trunk allowed 2051-2052
interface 1/1/42
    no shutdown
    mtu 9000
    description Towards LAN
    no routing
    vlan trunk native 1
    vlan trunk allowed 2061-2062
interface vlan 2051
    vrf attach vrf_1
    description Towards PE3
    ip mtu 9000
    ip address 20.5.1.2/24
interface vlan 2052
    vrf attach vrf_2
    description Towards PE3
    ip mtu 9000
    ip address 20.5.1.2/24
interface vlan 2061
    vrf attach vrf_1
    description Towards LAN
    ip mtu 9000
    ip address 20.6.1.1/24
interface vlan 2062
    vrf attach vrf_2
```

```

description Towards LAN
ip mtu 9000
ip address 20.6.1.1/24
!
!
!
!
!
router bgp 100
!
  vrf vrf_1
    neighbor 20.5.1.1 remote-as 6488163
    neighbor 20.5.1.1 description Towards PE3
    neighbor 20.6.1.2 remote-as 100
    neighbor 20.6.1.2 description Towards LAN
    address-family ipv4 unicast
      neighbor 20.5.1.1 activate
      neighbor 20.5.1.1 allowas-in 1
      neighbor 20.5.1.1 send-community both
      neighbor 20.5.1.1 soft-reconfiguration inbound
      neighbor 20.6.1.2 activate
      neighbor 20.6.1.2 next-hop-self
      neighbor 20.6.1.2 send-community both
      neighbor 20.6.1.2 soft-reconfiguration inbound
    exit-address-family
  !
  vrf vrf_2
    neighbor 20.5.1.1 remote-as 6488163
    neighbor 20.5.1.1 description Towards PE3
    neighbor 20.6.1.2 remote-as 100
    neighbor 20.6.1.2 description Towards LAN
    address-family ipv4 unicast
      neighbor 20.5.1.1 activate
      neighbor 20.5.1.1 allowas-in 1
      neighbor 20.5.1.1 send-community both
      neighbor 20.5.1.1 soft-reconfiguration inbound
      neighbor 20.6.1.2 activate
      neighbor 20.6.1.2 next-hop-self
      neighbor 20.6.1.2 send-community both
      neighbor 20.6.1.2 soft-reconfiguration inbound
    exit-address-family
  !
https-server vrf mgmt

```

CE3 verification

```

CE3# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS           : 100           BGP Router Identifier : (null)
Peers              : 0             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----

Address-family : IPv6 Unicast
-----

```

Address-family : L2VPN EVPN

VRF : vrf_1

BGP Summary

Local AS	: 100	BGP Router Identifier	: 20.6.1.1
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.5.1.1	6488163	34	33	00h:25m:12s	Established	Up
20.6.1.2	100	54	62	00h:25m:04s	Established	Up

Address-family : IPv6 Unicast

VRF : vrf_2

BGP Summary

Local AS	: 100	BGP Router Identifier	: 20.6.1.1
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.5.1.1	6488163	34	34	00h:25m:11s	Established	Up
20.6.1.2	100	56	63	00h:25m:04s	Established	Up

Address-family : IPv6 Unicast

CE3# **show bgp all-vrf all**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Router-ID not configured

Address-family : IPv4 Unicast

Network	NextHop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : IPv6 Unicast

Network	NextHop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : L2VPN EVPN

Network	NextHop	Metric
---------	---------	--------

```

      LocPrf      Weight      Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.6.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight      Path
*>e 101.0.0.0/24      20.5.1.1      0      100      0      6488163 100 i
*>i 201.0.0.0/24      20.6.1.2      0      0      0      i
Total number of entries 2

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight      Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.6.1.1

Address-family : IPv4 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight      Path
*>e 102.0.0.0/24      20.5.1.1      0      100      0      6488163 100 i
*>i 202.0.0.0/24      20.6.1.2      0      0      0      i
Total number of entries 2

Address-family : IPv6 Unicast
-----
      Network      Nexthop      Metric      LocPrf      Weight      Path
Total number of entries 0

```

CE3# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: vrf_1

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric
20.5.1.0/24 [0/0]	-	vlan2051	-	C	
20.5.1.2/32 [0/0]	-	vlan2051	-	L	
20.6.1.0/24 [0/0]	-	vlan2061	-	C	
20.6.1.1/32 [0/0]	-	vlan2061	-	L	
101.0.0.0/24	20.5.1.1	vlan2051	-	B/E	

```

[20/0]      01h:10m:42s
201.0.0.0/24      20.6.1.2      vlan2061      -      B/I
[200/0]      01h:10m:34s

VRF: vrf_2

Prefix      Nexthop      Interface      VRF(egress)      Origin/
Distance/   Age
-----
-----
20.5.1.0/24      -      -      vlan2052      -      C
[0/0]      -
20.5.1.2/32      -      -      vlan2052      -      L
[0/0]      -
20.6.1.0/24      -      -      vlan2062      -      C
[0/0]      -
20.6.1.1/32      -      -      vlan2062      -      L
[0/0]      -
102.0.0.0/24      20.5.1.1      vlan2052      -      B/E
[20/0]      00h:54m:06s
202.0.0.0/24      20.6.1.2      vlan2062      -      B/I
[200/0]      00h:54m:06s

Total Route Count : 12

```

P1 configuration

```

P1# show running
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001BF
!export-password: default
hostname P1
profile core-spine
logging console severity crit
cli-session
    timeout 0
!
!
!
!
!
!
ssh server vrf mgmt
vlan 1
interface mgmt
    no shutdown
    ip dhcp
system interface-group 1 speed 10g
    !interface group 1 contains ports 1/1/1-1/1/4
interface lag 99
    no shutdown
    description Towards PE3
    ip mtu 9198
    ip address 30.0.2.1/24
    lacp mode active
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable

```

```

interface 1/1/14
    no shutdown
    mtu 9198
    description Towards PE1
    ip mtu 9198
    ip address 30.0.0.2/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/15
    no shutdown
    mtu 9198
    description Towards PE2
    ip mtu 9198
    ip address 30.0.1.2/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/16
    no shutdown
    mtu 9198
    description Towards PE3
    lag 99
interface 1/1/17
    no shutdown
    mtu 9198
    description Towards PE3
    lag 99
interface 1/1/27
    description Towards PE3
interface 1/1/28
    description Towards PE3
interface loopback 0
    ip address 4.4.4.4/32
    ip ospf 1 area 0.0.0.0
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 1.1.1.1 remote-as 6488163
    neighbor 1.1.1.1 description Towards PE1
    neighbor 1.1.1.1 update-source loopback 0
    neighbor 2.2.2.2 remote-as 6488163
    neighbor 2.2.2.2 description Towards PE2
    neighbor 2.2.2.2 update-source loopback 0
    neighbor 3.3.3.3 remote-as 6488163
    neighbor 3.3.3.3 description Towards PE2
    neighbor 3.3.3.3 update-source loopback 0
    neighbor 5.5.5.5 remote-as 6488163
    neighbor 5.5.5.5 description Towards RR2
    neighbor 5.5.5.5 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 1.1.1.1 activate
        neighbor 1.1.1.1 route-reflector-client
        neighbor 1.1.1.1 send-community both
        neighbor 2.2.2.2 activate
        neighbor 2.2.2.2 route-reflector-client
        neighbor 2.2.2.2 send-community both

```

```

        neighbor 3.3.3.3 activate
        neighbor 3.3.3.3 route-reflector-client
        neighbor 3.3.3.3 send-community both
        neighbor 5.5.5.5 activate
        neighbor 5.5.5.5 send-community both
    exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
    router-id loopback0

```

P1 verification

P1# **show ip ospf neighbors**

VRF : default Process : 1

=====

Total Number of Neighbors : 3

Neighbor ID	Priority	State	Nbr Address	Interface
1.1.1.1	1	FULL/DR	30.0.0.1	1/1/14
2.2.2.2	1	FULL/BDR	30.0.1.1	1/1/15
3.3.3.3	1	FULL/BDR	30.0.2.2	lag99

P1# **show mpls ldp neighbor**

Local LDP Identifier: 4.4.4.4:0, Peer LDP Identifier: 2.2.2.2:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:36

State: operational

LDP Discovery Sources: 1/1/15

Addresses bound to this peer:

2.2.2.2 30.0.1.1 30.0.4.1

Local LDP Identifier: 4.4.4.4:0, Peer LDP Identifier: 3.3.3.3:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:12:42

State: operational

LDP Discovery Sources: lag99

Addresses bound to this peer:

3.3.3.3 30.0.2.2 30.0.5.2

Local LDP Identifier: 4.4.4.4:0, Peer LDP Identifier: 1.1.1.1:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:36

State: operational

LDP Discovery Sources: 1/1/14

Addresses bound to this peer:

1.1.1.1 30.0.0.1 30.0.3.1

```

P1# show mpls ldp binding
30.0.4.1/32
    No local binding
    remote binding: lsr:2.2.2.2:0 label: exp-null
30.0.2.1/32
    local binding: label: exp-null
    No remote binding
30.0.1.2/32
    local binding: label: exp-null
    No remote binding
30.0.0.1/32
    No local binding
    remote binding: lsr:1.1.1.1:0 label: exp-null
30.0.1.1/32
    No local binding
    remote binding: lsr:2.2.2.2:0 label: exp-null
30.0.5.2/32
    No local binding
    remote binding: lsr:3.3.3.3:0 label: exp-null
30.0.2.2/32
    No local binding
    remote binding: lsr:3.3.3.3:0 label: exp-null
2.2.2.2/32
    local binding: label: 18
    remote binding: lsr:1.1.1.1:0 label:18
    remote binding: lsr:3.3.3.3:0 label:17
    remote binding: lsr:2.2.2.2:0 label: exp-null
5.5.5.5/32
    local binding: label: 17
    remote binding: lsr:1.1.1.1:0 label:17
    remote binding: lsr:3.3.3.3:0 label:19
    remote binding: lsr:2.2.2.2:0 label:18
30.0.0.2/32
    local binding: label: exp-null
    No remote binding
3.3.3.3/32
    local binding: label: 19
    remote binding: lsr:1.1.1.1:0 label:19
    remote binding: lsr:3.3.3.3:0 label: exp-null
    remote binding: lsr:2.2.2.2:0 label:19
4.4.4.4/32
    local binding: label: exp-null
    remote binding: lsr:1.1.1.1:0 label:16
    remote binding: lsr:3.3.3.3:0 label:18
    remote binding: lsr:2.2.2.2:0 label:17
30.0.3.1/32
    No local binding
    remote binding: lsr:1.1.1.1:0 label: exp-null
1.1.1.1/32
    local binding: label: 16
    remote binding: lsr:1.1.1.1:0 label: exp-null
    remote binding: lsr:3.3.3.3:0 label:16
    remote binding: lsr:2.2.2.2:0 label:16

```

```

P1# show mpls forwarding

```

```

MPLS Bindings

```

```

Entry Bindings    : 4
Exit Bindings     : 2
Transit Bindings  : 4

```

```

PHP Mode      : Explicit-Null
QoS Mode      : Uniform
TTL Propagation : Uniform

```

Entry Bindings:

Origin Egress	Prefix Egress	Ingress Status VRF	Nexthop Address	Outgoing Label
Interface	VRF			

LDP	1.1.1.1/32	default	30.0.0.1	exp-null
1/1/14	default	operational		
LDP	2.2.2.2/32	default	30.0.1.1	exp-null
1/1/15	default	operational		
LDP	3.3.3.3/32	default	30.0.2.2	exp-null lag99
	default	operational		
LDP	5.5.5.5/32	default	30.0.2.2	19 lag99
	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status

static	n/a	exp-null	-	default	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix Outgoing	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
	Label					

LDP	1.1.1.1/32	16		1/1/14	default	30.0.0.1
	exp-null	operational				
LDP	5.5.5.5/32	17		lag99	default	30.0.2.2
	19	operational				
LDP	2.2.2.2/32	18		1/1/15	default	30.0.1.1
	exp-null	operational				
LDP	3.3.3.3/32	19		lag99	default	30.0.2.2
	exp-null	operational				

P1# **show bgp vpnv4 un neighbors**

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 1.1.1.1 (Internal)

```

Description      : Towards PE1
Peer-group       :

```

```

Remote Router Id  : 1.1.1.1      Local Router Id  : 4.4.4.4
Remote AS         : 6488163      Local AS         : 6488163
Remote Port       : 42093        Local Port       : 179
State             : Established   Admin Status     : Up
Conn. Established : 1            Conn. Dropped    : 0
Passive           : No           Update-Source    : loopback0

```

Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:15m:55s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		
Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	-----	-----
Open	1	1
Notification	0	0
Updates	7	3
Keepalives	18	18
Route Refresh	0	0
Total	26	22

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: Yes	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 2.2.2.2 (Internal)

Description	: Towards PE2
Peer-group	:

Remote Router Id	: 2.2.2.2	Local Router Id	: 4.4.4.4
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 44703	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0

Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:15m:21s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		
Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	----	----
Open	1	1
Notification	0	0
Updates	5	3
Keepalives	17	18
Route Refresh	0	0
Total	23	22

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: Yes	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 3.3.3.3 (Internal)

Description	: Towards PE2
Peer-group	:

Remote Router Id	: 3.3.3.3	Local Router Id	: 4.4.4.4
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 33231
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0

```

Cfg. Hold Time      : 180
Neg. Hold Time      : 180
Up/Down Time        : 00h:14m:48s
Local-AS Prepend    : No
BFD                  : Disabled
Password            :
Last Err Sent        : No Error
Last SubErr Sent     : No Error
Last Err Rcvd        : No Error
Last SubErr Rcvd     : No Error

Graceful-Restart     : Enabled
Gr. Stalepath Time   : 300
TTL                  : 255
Weight               : 0
Confederation-Peers : No

Cfg. Keep Alive      : 60
Neg. Keep Alive      : 60
Connect-Retry Time   : 120
Alt. Local-AS        : 0

Gr. Restart Time     : 120
Remove Private-AS    : No
Local Cluster-ID     :
Fall-over             : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	3
Keepalives	18	17
Route Refresh	0	0
Total	22	21

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

```

Rt. Reflect. Client : Yes
Allow-AS in          : 0
Max. Prefix          : 300000
Nexthop-Self         :
Cfg. Add-Path        :
Neg. Add-Path        :

Send Community       : both
Advt. Interval       : 30
Soft Reconfig In     :
Default-Originate    :

```

```

Routemap In          :
Routemap Out          :
ORF type              : Prefix-list
ORF capability        :

```

BGP Neighbor 5.5.5.5 (Internal)

```

Description           : Towards RR2
Peer-group             :

```

Remote Router Id	: 5.5.5.5	Local Router Id	: 4.4.4.4
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 40545
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0

```

Cfg. Hold Time      : 180
Neg. Hold Time      : 180
Up/Down Time        : 00h:15m:33s
Local-AS Prepend    : No
BFD                  : Disabled
Password            :
Last Err Sent        : No Error
Last SubErr Sent     : No Error
Last Err Rcvd        : No Error
Last SubErr Rcvd     : No Error

Graceful-Restart     : Enabled
Gr. Stalepath Time   : 300
TTL                  : 255
Weight               : 0
Confederation-Peers : No

Cfg. Keep Alive      : 60
Neg. Keep Alive      : 60
Connect-Retry Time   : 120
Alt. Local-AS        : 0

Gr. Restart Time     : 120
Remove Private-AS    : No
Local Cluster-ID     :
Fall-over             : No

```

Message statistics	Sent	Rcvd
-----	----	-----
Open	1	1
Notification	0	0
Updates	7	6
Keepalives	17	17
Route Refresh	0	0
Total	25	24

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

```

Rt. Reflect. Client : No
Allow-AS in          : 0
Max. Prefix           : 300000
Nexthop-Self          :
Cfg. Add-Path         :
Neg. Add-Path         :

Send Community        : both
Advt. Interval        : 30
Soft Reconfig In      :
Default-Originate     :

Routemap In           :
Routemap Out          :
ORF type               : Prefix-list
ORF capability         :

```

P1# **show bgp vpnv4 unicast**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 4.4.4.4

Network	Nexthop	Metric	LocPrf	Weight	Path
---------	---------	--------	--------	--------	------

```

Route Distinguisher: 1:1                               (Label 20)
*>i 101.0.0.0/24      1.1.1.1      0      100      0      100 i
* i 101.0.0.0/24      2.2.2.2      0      100      0      100 i
* i 101.0.0.0/24      1.1.1.1      0      100      0      100 i

Route Distinguisher: 2:1                               (Label 22)
*>i 102.0.0.0/24      1.1.1.1      0      100      0      100 i
* i 102.0.0.0/24      2.2.2.2      0      100      0      100 i
* i 102.0.0.0/24      1.1.1.1      0      100      0      100 i

Route Distinguisher: 1:3                               (Label 21)
*>i 201.0.0.0/24      3.3.3.3      0      100      0      100 i
* i 201.0.0.0/24      3.3.3.3      0      100      0      100 i

Route Distinguisher: 2:3                               (Label 22)
*>i 202.0.0.0/24      3.3.3.3      0      100      0      100 i
* i 202.0.0.0/24      3.3.3.3      0      100      0      100 i
Total number of entries 10

```

P1# **show bgp all-vrf all summary**

VRF : default

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 4.4.4.4
Peers	: 4	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
1.1.1.1	6488163	36	43	00h:27m:27s		Established Up
2.2.2.2	6488163	37	40	00h:26m:53s		Established Up
3.3.3.3	6488163	35	40	00h:26m:20s		Established Up
5.5.5.5	6488163	39	40	00h:27m:05s		Established Up

Address-family : L2VPN EVPN

P1# **show bgp all-vrf all**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths

Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 4.4.4.4

Address-family : IPv4 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : IPv6 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : VPNv4 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1 (Label 20)					
*>i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 101.0.0.0/24	2.2.2.2	0	100	0	100 i
* i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 2:1 (Label 22)					
*>i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 102.0.0.0/24	2.2.2.2	0	100	0	100 i
* i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 1:3 (Label 21)					
*>i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
Route Distinguisher: 2:3 (Label 22)					
*>i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
Total number of entries 10					

Address-family : L2VPN EVPN

Network	Nexthop	Metric
LocPrf Weight Path		

Total number of entries 0		

P1# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: default

Prefix	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric
Distance/						

1.1.1.1/32		30.0.0.1	1/1/14	-	O	
[110/100]	01h:13m:03s					
2.2.2.2/32		30.0.1.1	1/1/15	-	O	
[110/100]	01h:12m:33s					
3.3.3.3/32		30.0.2.2	lag99	-	O	
[110/50]	01h:11m:57s					
4.4.4.4/32		-	loopback0	-	L	
[0/0]	-					

5.5.5.5/32	30.0.2.2	lag99	-	O
[110/100]	01h:11m:52s			
30.0.0.0/24	-	1/1/14	-	C
[0/0]	-			
30.0.0.2/32	-	1/1/14	-	L
[0/0]	-			
30.0.1.0/24	-	1/1/15	-	C
[0/0]	-			
30.0.1.2/32	-	1/1/15	-	L
[0/0]	-			
30.0.2.0/24	-	lag99	-	C
[0/0]	-			
30.0.2.1/32	-	lag99	-	L
[0/0]	-			
30.0.3.0/24	30.0.0.1	1/1/14	-	O
[110/200]	01h:11m:52s			
	30.0.2.2	lag99	-	
[110/200]	01h:11m:52s			
30.0.4.0/24	30.0.1.1	1/1/15	-	O
[110/200]	01h:11m:52s			
	30.0.2.2	lag99	-	
[110/200]	01h:11m:52s			
30.0.5.0/24	30.0.2.2	lag99	-	O
[110/100]	01h:11m:57s			

Total Route Count : 14

P2 configuration

```
P2# show running
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001BF
!export-password: default
hostname P2
profile core-spine
logging console severity crit
cli-session
    timeout 0
!
!
!
!
!
!
ssh server vrf mgmt
vlan 1
interface mgmt
    no shutdown
    ip dhcp
system interface-group 1 speed 10g
    !interface group 1 contains ports 1/1/1-1/1/4
interface lag 100
    no shutdown
    description Towards PE3
    ip mtu 9198
    ip address 30.0.5.1/24
    lacp mode active
    ip ospf 1 area 0.0.0.0
    mpls enable
```

```

    mpls ldp enable
interface 1/1/25
    no shutdown
    mtu 9198
    description Towards PE1
    ip mtu 9198
    ip address 30.0.3.2/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/26
    no shutdown
    mtu 9198
    description Towards PE2
    ip mtu 9198
    ip address 30.0.4.2/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/27
    no shutdown
    mtu 9198
    description Towards PE3
    lag 100
interface 1/1/28
    no shutdown
    mtu 9198
    description Towards PE3
    lag 100
interface loopback 0
    ip address 5.5.5.5/32
    ip ospf 1 area 0.0.0.0
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 1.1.1.1 remote-as 6488163
    neighbor 1.1.1.1 description Towards PE1
    neighbor 1.1.1.1 update-source loopback 0
    neighbor 2.2.2.2 remote-as 6488163
    neighbor 2.2.2.2 description Towards PE2
    neighbor 2.2.2.2 update-source loopback 0
    neighbor 3.3.3.3 remote-as 6488163
    neighbor 3.3.3.3 description Towards PE3
    neighbor 3.3.3.3 update-source loopback 0
    neighbor 4.4.4.4 remote-as 6488163
    neighbor 4.4.4.4 description Towards RR1
    neighbor 4.4.4.4 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 1.1.1.1 activate
        neighbor 1.1.1.1 route-reflector-client
        neighbor 1.1.1.1 send-community both
        neighbor 2.2.2.2 activate
        neighbor 2.2.2.2 route-reflector-client
        neighbor 2.2.2.2 send-community both
        neighbor 3.3.3.3 activate
        neighbor 3.3.3.3 route-reflector-client
        neighbor 3.3.3.3 send-community both

```

```

        neighbor 4.4.4.4 activate
        neighbor 4.4.4.4 send-community both
    exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
    router-id loopback0

```

P2 verification

P2# **show ip ospf neighbors**

VRF : default Process : 1

=====

Total Number of Neighbors : 3

Neighbor ID	Priority	State	Nbr Address	Interface
1.1.1.1	1	FULL/DR	30.0.3.1	1/1/25
2.2.2.2	1	FULL/DR	30.0.4.1	1/1/26
3.3.3.3	1	FULL/BDR	30.0.5.2	lag100

P2# **show mpls ldp neighbor**

Local LDP Identifier: 5.5.5.5:0, Peer LDP Identifier: 3.3.3.3:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:12:42

State: operational

LDP Discovery Sources: lag100

Addresses bound to this peer:
3.3.3.3 30.0.2.2 30.0.5.2

Local LDP Identifier: 5.5.5.5:0, Peer LDP Identifier: 1.1.1.1:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:19

State: operational

LDP Discovery Sources: 1/1/25

Addresses bound to this peer:
1.1.1.1 30.0.0.1 30.0.3.1

Local LDP Identifier: 5.5.5.5:0, Peer LDP Identifier: 2.2.2.2:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:14

State: operational

LDP Discovery Sources: 1/1/26

Addresses bound to this peer:
2.2.2.2 30.0.1.1 30.0.4.1

P2# **show mpls ldp binding**

30.0.3.2/32

```

        local binding: label: exp-null
        No remote binding
30.0.1.1/32
        No local binding
        remote binding: lsr:2.2.2.2:0 label: exp-null
2.2.2.2/32
        local binding: label: 18
        remote binding: lsr:1.1.1.1:0 label:18
        remote binding: lsr:3.3.3.3:0 label:17
        remote binding: lsr:2.2.2.2:0 label: exp-null
30.0.5.1/32
        local binding: label: exp-null
        No remote binding
30.0.4.2/32
        local binding: label: exp-null
        No remote binding
5.5.5.5/32
        local binding: label: exp-null
        remote binding: lsr:1.1.1.1:0 label:17
        remote binding: lsr:3.3.3.3:0 label:19
        remote binding: lsr:2.2.2.2:0 label:18
30.0.0.1/32
        No local binding
        remote binding: lsr:1.1.1.1:0 label: exp-null
30.0.2.2/32
        No local binding
        remote binding: lsr:3.3.3.3:0 label: exp-null
30.0.5.2/32
        No local binding
        remote binding: lsr:3.3.3.3:0 label: exp-null
4.4.4.4/32
        local binding: label: 17
        remote binding: lsr:1.1.1.1:0 label:16
        remote binding: lsr:3.3.3.3:0 label:18
        remote binding: lsr:2.2.2.2:0 label:17
30.0.4.1/32
        No local binding
        remote binding: lsr:2.2.2.2:0 label: exp-null
1.1.1.1/32
        local binding: label: 16
        remote binding: lsr:1.1.1.1:0 label: exp-null
        remote binding: lsr:3.3.3.3:0 label:16
        remote binding: lsr:2.2.2.2:0 label:16
3.3.3.3/32
        local binding: label: 19
        remote binding: lsr:1.1.1.1:0 label:19
        remote binding: lsr:3.3.3.3:0 label: exp-null
        remote binding: lsr:2.2.2.2:0 label:19
30.0.3.1/32
        No local binding
        remote binding: lsr:1.1.1.1:0 label: exp-null

```

P2# **show mpls forwarding**

MPLS Bindings

```

Entry Bindings      : 4
Exit Bindings       : 2
Transit Bindings    : 4
PHP Mode            : Explicit-Null
QoS Mode            : Uniform

```

TTL Propagation : Uniform

Entry Bindings:

Origin Egress	Prefix Egress	Ingress Status VRF	Nexthop Address	Outgoing Label
Interface	VRF			

LDP	1.1.1.1/32	default	30.0.3.1	exp-null
1/1/25	default	operational		
LDP	2.2.2.2/32	default	30.0.4.1	exp-null
1/1/26	default	operational		
LDP	3.3.3.3/32	default	30.0.5.2	exp-null
lag100	default	operational		
LDP	4.4.4.4/32	default	30.0.5.2	18
lag100	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status

static	n/a	exp-null	-	default	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix Outgoing	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address

LDP	1.1.1.1/32	16		1/1/25	default	30.0.3.1
	exp-null	operational				
LDP	4.4.4.4/32	17		lag100	default	30.0.5.2
	18	operational				
LDP	2.2.2.2/32	18		1/1/26	default	30.0.4.1
	exp-null	operational				
LDP	3.3.3.3/32	19		lag100	default	30.0.5.2
	exp-null	operational				

P2# **show bgp vpnv4 un neighbors**

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 1.1.1.1 (Internal)

Description : Towards PE1
Peer-group :

Remote Router Id	: 1.1.1.1	Local Router Id	: 5.5.5.5
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 40029	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60

```

Up/Down Time      : 00h:15m:40s      Connect-Retry Time : 120
Local-AS Prepend  : No                Alt. Local-AS      : 0
BFD               : Disabled
Password         :
Last Err Sent     : No Error
Last SubErr Sent  : No Error
Last Err Rcvd     : No Error
Last SubErr Rcvd  : No Error

```

```

Graceful-Restart   : Enabled          Gr. Restart Time   : 120
Gr. Stalepath Time : 300              Remove Private-AS  : No
TTL               : 255               Local Cluster-ID   :
Weight            : 0                 Fall-over          : No
Confederation-Peers : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	5	3
Keepalives	16	17
Route Refresh	0	0
Total	22	21

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

```

Address Family : VPNv4 Unicast
-----

```

```

Rt. Reflect. Client : Yes          Send Community      : both
Allow-AS in         : 0             Advt. Interval     : 30
Max. Prefix          : 300000       Soft Reconfig In   :
Nexthop-Self         :              Default-Originate  :
Cfg. Add-Path        :
Neg. Add-Path        :

```

```

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

BGP Neighbor 2.2.2.2 (Internal)

```

Description          : Towards PE2
Peer-group           :

```

Remote Router Id	: 2.2.2.2	Local Router Id	: 5.5.5.5
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 33107
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60

Up/Down Time : 00h:15m:30s Connect-Retry Time : 120
 Local-AS Prepend : No Alt. Local-AS : 0
 BFD : Disabled
 Password :
 Last Err Sent : No Error
 Last SubErr Sent : No Error
 Last Err Rcvd : No Error
 Last SubErr Rcvd : No Error

Graceful-Restart : Enabled Gr. Restart Time : 120
 Gr. Stalepath Time : 300 Remove Private-AS : No
 TTL : 255 Local Cluster-ID :
 Weight : 0 Fall-over : No
 Confederation-Peers : No

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	5	3
Keepalives	17	17
Route Refresh	0	0
Total	23	21

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client : Yes	Send Community : both
Allow-AS in : 0	Advt. Interval : 30
Max. Prefix : 300000	Soft Reconfig In :
Nexthop-Self :	Default-Originate :
Cfg. Add-Path :	
Neg. Add-Path :	

Routemap In :
 Routemap Out :
 ORF type : Prefix-list
 ORF capability :

BGP Neighbor 3.3.3.3 (Internal)
 Description : Towards PE3
 Peer-group :

Remote Router Id : 3.3.3.3	Local Router Id : 5.5.5.5
Remote AS : 6488163	Local AS : 6488163
Remote Port : 179	Local Port : 39781
State : Established	Admin Status : Up
Conn. Established : 1	Conn. Dropped : 0
Passive : No	Update-Source : loopback0
Cfg. Hold Time : 180	Cfg. Keep Alive : 60
Neg. Hold Time : 180	Neg. Keep Alive : 60

```

Up/Down Time       : 00h:14m:46s      Connect-Retry Time : 120
Local-AS Prepend   : No                Alt. Local-AS      : 0
BFD                : Disabled
Password          :
Last Err Sent      : No Error
Last SubErr Sent   : No Error
Last Err Rcvd      : No Error
Last SubErr Rcvd   : No Error

```

```

Graceful-Restart    : Enabled          Gr. Restart Time   : 120
Gr. Stalepath Time  : 300              Remove Private-AS  : No
TTL                 : 255              Local Cluster-ID   :
Weight              : 0                Fall-over           : No
Confederation-Peers : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	3
Keepalives	17	17
Route Refresh	0	0
Total	21	21

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

```

Rt. Reflect. Client : Yes              Send Community     : both
Allow-AS in         : 0                Advt. Interval     : 30
Max. Prefix          : 300000           Soft Reconfig In   :
Nexthop-Self         :                 Default-Originate  :
Cfg. Add-Path        :
Neg. Add-Path        :

```

```

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

BGP Neighbor 4.4.4.4 (Internal)

```

Description          : Towards RR1
Peer-group           :

```

Remote Router Id	: 4.4.4.4	Local Router Id	: 5.5.5.5
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 40545	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60

```

Up/Down Time      : 00h:15m:33s      Connect-Retry Time : 120
Local-AS Prepend  : No                Alt. Local-AS      : 0
BFD               : Disabled
Password         :
Last Err Sent     : No Error
Last SubErr Sent  : No Error
Last Err Rcvd     : No Error
Last SubErr Rcvd  : No Error

```

```

Graceful-Restart   : Enabled          Gr. Restart Time   : 120
Gr. Stalepath Time : 300              Remove Private-AS  : No
TTL               : 255              Local Cluster-ID   :
Weight            : 0                Fall-over          : No
Confederation-Peers : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	6	7
Keepalives	17	17
Route Refresh	0	0
Total	24	25

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

```

Address Family : VPNv4 Unicast
-----

```

```

Rt. Reflect. Client : No                Send Community      : both
Allow-AS in         : 0                Advt. Interval      : 30
Max. Prefix          : 300000          Soft Reconfig In    :
Nexthop-Self         :                 Default-Originate   :
Cfg. Add-Path        :
Neg. Add-Path        :

```

```

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

P2# **show bgp vpnv4 unicast**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 5.5.5.5

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 2:1 (Label 21)					

```

*>i 101.0.0.0/24      1.1.1.1      0      100      0      100 i
* i 101.0.0.0/24      2.2.2.2      0      100      0      100 i

Route Distinguisher: 1:1      (Label 20)
* i 101.0.0.0/24      1.1.1.1      0      100      0      100 i

Route Distinguisher: 2:3      (Label 20)
*>i 201.0.0.0/24      3.3.3.3      0      100      0      100 i

Route Distinguisher: 1:3      (Label 21)
* i 201.0.0.0/24      3.3.3.3      0      100      0      100 i
Total number of entries 5

```

P2# show mpls forwarding

MPLS Bindings

```

Entry Bindings   : 4
Exit Bindings    : 2
Transit Bindings : 4
PHP Mode         : Explicit-Null
QoS Mode         : Uniform
TTL Propagation  : Uniform

```

Entry Bindings:

Origin Egress	Prefix Egress	Ingress Status VRF	Nexthop Address	Outgoing Label
Interface	VRF			

LDP	1.1.1.1/32	default	30.0.3.1	exp-null
1/1/25	default	operational		
LDP	2.2.2.2/32	default	30.0.4.1	exp-null
1/1/26	default	operational		
LDP	3.3.3.3/32	default	30.0.5.2	exp-null
lag100	default	operational		
LDP	4.4.4.4/32	default	30.0.5.2	18
lag100	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status

static	n/a	exp-null	-	default	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix Outgoing	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
	Label					

LDP	1.1.1.1/32		16	1/1/25	default	30.0.3.1
	exp-null	operational				
LDP	4.4.4.4/32		17	lag100	default	30.0.5.2
	18	operational				

LDP	2.2.2.2/32	18	1/1/26	default	30.0.4.1
	exp-null	operational			
LDP	3.3.3.3/32	19	lag100	default	30.0.5.2
	exp-null	operational			

P2# **show bgp vpnv4 unicast**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 5.5.5.5

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1 (Label 20)					
*>i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 101.0.0.0/24	2.2.2.2	0	100	0	100 i
* i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 2:1 (Label 22)					
*>i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 102.0.0.0/24	2.2.2.2	0	100	0	100 i
* i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 1:3 (Label 21)					
*>i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
Route Distinguisher: 2:3 (Label 22)					
*>i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 202.0.0.0/24	3.3.3.3	0	100	0	100 i

Total number of entries 10

P2# **show bgp all-vrf all summary**

VRF : default

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 5.5.5.5
Peers	: 4	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
1.1.1.1	6488163	34	39	00h:27m:12s	Established	Up
2.2.2.2	6488163	35	41	00h:27m:02s	Established	Up
3.3.3.3	6488163	36	39	00h:26m:17s	Established	Up
4.4.4.4	6488163	40	39	00h:27m:05s	Established	Up

Address-family : L2VPN EVPN

```
P2# show bgp all-vrf all
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete
```

```
VRF : default
```

```
Local Router-ID 5.5.5.5
```

```
Address-family : IPv4 Unicast
```

```
-----
      Network          Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0
```

```
Address-family : IPv6 Unicast
```

```
-----
      Network          Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0
```

```
Address-family : VPNv4 Unicast
```

```
-----
      Network          Nexthop      Metric      LocPrf      Weight Path

Route Distinguisher: 1:1              (Label 20)
*>i 101.0.0.0/24      1.1.1.1          0          100          0          100 i
* i 101.0.0.0/24      2.2.2.2          0          100          0          100 i
* i 101.0.0.0/24      1.1.1.1          0          100          0          100 i
```

```
Route Distinguisher: 2:1              (Label 22)
*>i 102.0.0.0/24      1.1.1.1          0          100          0          100 i
* i 102.0.0.0/24      2.2.2.2          0          100          0          100 i
* i 102.0.0.0/24      1.1.1.1          0          100          0          100 i
```

```
Route Distinguisher: 1:3              (Label 21)
*>i 201.0.0.0/24      3.3.3.3          0          100          0          100 i
* i 201.0.0.0/24      3.3.3.3          0          100          0          100 i
```

```
Route Distinguisher: 2:3              (Label 22)
*>i 202.0.0.0/24      3.3.3.3          0          100          0          100 i
* i 202.0.0.0/24      3.3.3.3          0          100          0          100 i
Total number of entries 10
```

```
Address-family : L2VPN EVPN
```

```
-----
      Network          Nexthop      Metric
      LocPrf      Weight      Path
-----
Total number of entries 0
```

```
P2# show ip route all-vrf
```

```
Displaying ipv4 routes selected for forwarding
```

```
Origin Codes: C - connected, S - static, L - local
```

```
               R - RIP, B - BGP, O - OSPF
```

```
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
```

```
               IA - OSPF internal area, E1 - OSPF external type 1
```

```
               E2 - OSPF external type 2
```

```
VRF: default
```

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

1.1.1.1/32		30.0.3.1	1/1/25	-	O	
[110/100]	01h:12m:46s					
2.2.2.2/32		30.0.4.1	1/1/26	-	O	
[110/100]	01h:12m:21s					
3.3.3.3/32		30.0.5.2	lag100	-	O	
[110/50]	01h:11m:52s					
4.4.4.4/32		30.0.5.2	lag100	-	O	
[110/100]	01h:11m:52s					
5.5.5.5/32		-	loopback0	-	L	
[0/0]	-					
30.0.0.0/24		30.0.5.2	lag100	-	O	
[110/200]	01h:11m:52s					
		30.0.3.1	1/1/25	-		
[110/200]	01h:11m:52s					
30.0.1.0/24		30.0.4.1	1/1/26	-	O	
[110/200]	01h:11m:52s					
		30.0.5.2	lag100	-		
[110/200]	01h:11m:52s					
30.0.2.0/24		30.0.5.2	lag100	-	O	
[110/100]	01h:11m:52s					
30.0.3.0/24		-	1/1/25	-	C	
[0/0]	-					
30.0.3.2/32		-	1/1/25	-	L	
[0/0]	-					
30.0.4.0/24		-	1/1/26	-	C	
[0/0]	-					
30.0.4.2/32		-	1/1/26	-	L	
[0/0]	-					
30.0.5.0/24		-	lag100	-	C	
[0/0]	-					
30.0.5.1/32		-	lag100	-	L	
[0/0]	-					
Total Route Count : 14						

PE1 configuration

```

PE1# show running
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001BF
!export-password: default
hostname PE1
profile core-spine
logging console severity crit
vrf vrf_1
  rd 1:1
  l3vpn-only
  address-family ipv4 unicast
    route-target export 1:1
    route-target import 1:1
  exit-address-family
vrf vrf_2
  rd 2:1
  l3vpn-only

```

```

        address-family ipv4 unicast
            route-target export 2:1
            route-target import 2:1
        exit-address-family
    cli-session
        timeout 0
    !
    !
    !
    !
    !
    !
ssh server vrf mgmt
vlan 1,2011-2012,2031-2032
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/37
    no shutdown
    mtu 9000
    description Towards CE1
    no routing
    vlan trunk native 1
    vlan trunk allowed 2011-2012
interface 1/1/38
    no shutdown
    mtu 9000
    description Towards CE2
    no routing
    vlan trunk native 1
    vlan trunk allowed 2031-2032
interface 1/1/39
    no shutdown
    mtu 9198
    description Towards P1
    ip mtu 9198
    ip address 30.0.0.1/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/40
    no shutdown
    mtu 9198
    description Towards P2
    ip mtu 9198
    ip address 30.0.3.1/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface loopback 0
    ip address 1.1.1.1/32
    ip ospf 1 area 0.0.0.0
interface vlan 2011
    vrf attach vrf_1
    description Towards CE1
    ip mtu 9000
    ip address 20.1.1.2/24
interface vlan 2012
    vrf attach vrf_2
    description Towards CE1
    ip mtu 9000
    ip address 20.1.1.2/24

```

```

interface vlan 2031
    vrf attach vrf_1
    description Towards CE2
    ip mtu 9000
    ip address 20.3.1.2/24
interface vlan 2032
    vrf attach vrf_2
    description Towards CE2
    ip mtu 9000
    ip address 20.3.1.2/24
!
ip community-list standard sitel_community description For_setting_community_From_Sitel
ip community-list standard sitel_community seq 10 permit 99:99
!
!
!
route-map rmap1 permit seq 10
    description For_setting_community_For_Sitel_Received_EBGP_routes
    set community 99:99
route-map rmap2 deny seq 10
    description For_Denying_routes_with_Sitel_community_To_EBGP_Peer
    match community-list sitel_community
route-map rmap2 permit seq 20
    description For_Allowing_all_other_route
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 4.4.4.4 remote-as 6488163
    neighbor 4.4.4.4 description Towards RR1{P1}
    neighbor 4.4.4.4 update-source loopback 0
    neighbor 5.5.5.5 remote-as 6488163
    neighbor 5.5.5.5 description Towards RR2{P2}
    neighbor 5.5.5.5 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 4.4.4.4 activate
        neighbor 4.4.4.4 send-community both
        neighbor 5.5.5.5 activate
        neighbor 5.5.5.5 send-community both
    exit-address-family
!
vrf vrf_1
    neighbor 20.1.1.1 remote-as 100
    neighbor 20.1.1.1 description Towards CE1
    neighbor 20.3.1.1 remote-as 100
    neighbor 20.3.1.1 description Towards CE2
    address-family ipv4 unicast
        neighbor 20.1.1.1 activate
        neighbor 20.1.1.1 route-map rmap1 in
        neighbor 20.1.1.1 route-map rmap2 out
        neighbor 20.1.1.1 send-community both
        neighbor 20.1.1.1 soft-reconfiguration inbound
        neighbor 20.3.1.1 activate
        neighbor 20.3.1.1 route-map rmap1 in
        neighbor 20.3.1.1 route-map rmap2 out
        neighbor 20.3.1.1 send-community both
        neighbor 20.3.1.1 soft-reconfiguration inbound
    exit-address-family
!
vrf vrf_2
    neighbor 20.1.1.1 remote-as 100

```

```

neighbor 20.1.1.1 description Towards CE1
neighbor 20.3.1.1 remote-as 100
neighbor 20.3.1.1 description Towards CE2
address-family ipv4 unicast
    neighbor 20.1.1.1 activate
    neighbor 20.1.1.1 route-map rmap1 in
    neighbor 20.1.1.1 route-map rmap2 out
    neighbor 20.1.1.1 send-community both
    neighbor 20.1.1.1 soft-reconfiguration inbound
    neighbor 20.3.1.1 activate
    neighbor 20.3.1.1 route-map rmap1 in
    neighbor 20.3.1.1 route-map rmap2 out
    neighbor 20.3.1.1 send-community both
    neighbor 20.3.1.1 soft-reconfiguration inbound
exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
    router-id loopback0

```

PE1 verification

PE1# **show ip ospf neighbors**

VRF : default Process : 1

=====

Total Number of Neighbors : 2

Neighbor ID	Priority	State	Nbr Address	Interface
4.4.4.4	1	FULL/BDR	30.0.0.2	1/1/39
5.5.5.5	1	FULL/BDR	30.0.3.2	1/1/40

PE1# **show mpls ldp neighbor**

Local LDP Identifier: 1.1.1.1:0, Peer LDP Identifier: 4.4.4.4:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:36

State: operational

LDP Discovery Sources: 1/1/39

Addresses bound to this peer:

30.0.0.2 30.0.1.2 30.0.2.1 4.4.4.4

Local LDP Identifier: 1.1.1.1:0, Peer LDP Identifier: 5.5.5.5:0

Graceful Restart: No

Session Holdtime: 40 sec

Up time: 00:13:19

State: operational

LDP Discovery Sources: 1/1/40

Addresses bound to this peer:

30.0.3.2 30.0.4.2 30.0.5.1 5.5.5.5

```

PE1# show mpls ldp binding
5.5.5.5/32
    local binding: label: 17
    remote binding: lsr:5.5.5.5:0 label: exp-null
    remote binding: lsr:4.4.4.4:0 label:17
30.0.1.2/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null
30.0.3.2/32
    No local binding
    remote binding: lsr:5.5.5.5:0 label: exp-null
30.0.2.1/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null
1.1.1.1/32
    local binding: label: exp-null
    remote binding: lsr:5.5.5.5:0 label:16
    remote binding: lsr:4.4.4.4:0 label:16
4.4.4.4/32
    local binding: label: 16
    remote binding: lsr:5.5.5.5:0 label:17
    remote binding: lsr:4.4.4.4:0 label: exp-null
30.0.0.1/32
    local binding: label: exp-null
    No remote binding
3.3.3.3/32
    local binding: label: 19
    remote binding: lsr:5.5.5.5:0 label:19
    remote binding: lsr:4.4.4.4:0 label:19
30.0.0.2/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null
30.0.4.2/32
    No local binding
    remote binding: lsr:5.5.5.5:0 label: exp-null
2.2.2.2/32
    local binding: label: 18
    remote binding: lsr:5.5.5.5:0 label:18
    remote binding: lsr:4.4.4.4:0 label:18
30.0.3.1/32
    local binding: label: exp-null
    No remote binding
30.0.5.1/32
    No local binding
    remote binding: lsr:5.5.5.5:0 label: exp-null

```

```

PE1# show mpls forwarding

```

MPLS Bindings

```

Entry Bindings    : 8
Exit Bindings     : 4
Transit Bindings  : 6
PHP Mode          : Explicit-Null
QoS Mode          : Uniform
TTL Propagation   : Uniform

```

Entry Bindings:

Origin	Prefix	Ingress	Nextthop	Outgoing
Egress	Egress	Status		

Interface	VRF	VRF	Address	Label

LDP	2.2.2.2/32	default	30.0.3.2	18
1/1/40	default	operational		
LDP	2.2.2.2/32	default	30.0.0.2	18
1/1/39	default	operational		
LDP	3.3.3.3/32	default	30.0.3.2	19
1/1/40	default	operational		
LDP	3.3.3.3/32	default	30.0.0.2	19
1/1/39	default	operational		
LDP	4.4.4.4/32	default	30.0.0.2	exp-null
1/1/39	default	operational		
LDP	5.5.5.5/32	default	30.0.3.2	exp-null
1/1/40	default	operational		
BGP	201.0.0.0/24	vrf_1	3.3.3.3	21
1/1/40	default	operational		
BGP	202.0.0.0/24	vrf_2	3.3.3.3	22
1/1/40	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status

static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	20	vrf_1	operational
BGP	n/a	imp-null	22	vrf_2	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix	Status	Incoming Label	Egress Interface	Egress VRF	Nextthop Address

LDP	4.4.4.4/32		16	1/1/39	default	30.0.0.2
	exp-null	operational				
LDP	5.5.5.5/32		17	1/1/40	default	30.0.3.2
	exp-null	operational				
LDP	2.2.2.2/32		18	1/1/40	default	30.0.3.2
	18	operational				
LDP	2.2.2.2/32		18	1/1/39	default	30.0.0.2
	18	operational				
LDP	3.3.3.3/32		19	1/1/40	default	30.0.3.2
	19	operational				
LDP	3.3.3.3/32		19	1/1/39	default	30.0.0.2
	19	operational				

PE1# **show bgp vpnv4 un neighbors**

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 4.4.4.4 (Internal)

Description : Towards RR1{P1}

Peer-group :

```

Remote Router Id      : 4.4.4.4          Local Router Id      : 1.1.1.1
Remote AS             : 6488163          Local AS             : 6488163
Remote Port          : 179               Local Port           : 42093
State                 : Established        Admin Status         : Up
Conn. Established     : 1                 Conn. Dropped        : 0
Passive               : No                Update-Source        : loopback0
Cfg. Hold Time        : 180               Cfg. Keep Alive     : 60
Neg. Hold Time        : 180               Neg. Keep Alive     : 60
Up/Down Time         : 00h:15m:55s       Connect-Retry Time  : 120
Local-AS Prepend      : No                Alt. Local-AS       : 0
BFD                   : Disabled
Password              :
Last Err Sent         : No Error
Last SubErr Sent      : No Error
Last Err Rcvd        : No Error
Last SubErr Rcvd     : No Error

Graceful-Restart      : Enabled            Gr. Restart Time    : 120
Gr. Stalepath Time    : 300               Remove Private-AS   : No
TTL                   : 255               Local Cluster-ID    :
Weight                : 0                 Fall-over            : No
Confederation-Peers   : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	7
Keepalives	18	18
Route Refresh	0	0
Total	22	26

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

```

Rt. Reflect. Client : No                Send Community      : both
Allow-AS in         : 0                  Advt. Interval     : 30
Max. Prefix         : 300000             Soft Reconfig In    :
Nexthop-Self        :                   Default-Originate   :
Cfg. Add-Path       :
Neg. Add-Path       :

```

```

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

```

BGP Neighbor 5.5.5.5 (Internal)
Description          : Towards RR2{P2}
Peer-group           :

```

```

Remote Router Id      : 5.5.5.5          Local Router Id      : 1.1.1.1
Remote AS             : 6488163          Local AS             : 6488163
Remote Port           : 179              Local Port           : 40029
State                 : Established        Admin Status         : Up
Conn. Established     : 1                 Conn. Dropped        : 0
Passive               : No                Update-Source        : loopback0
Cfg. Hold Time        : 180               Cfg. Keep Alive     : 60
Neg. Hold Time        : 180               Neg. Keep Alive     : 60
Up/Down Time          : 00h:15m:40s       Connect-Retry Time  : 120
Local-AS Prepend      : No                Alt. Local-AS       : 0
BFD                   : Disabled
Password              :
Last Err Sent         : No Error
Last SubErr Sent      : No Error
Last Err Rcvd         : No Error
Last SubErr Rcvd      : No Error

Graceful-Restart      : Enabled            Gr. Restart Time    : 120
Gr. Stalepath Time    : 300               Remove Private-AS   : No
TTL                   : 255               Local Cluster-ID    :
Weight                : 0                 Fall-over            : No
Confederation-Peers   : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	5
Keepalives	17	16
Route Refresh	0	0
Total	21	22

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

```

Rt. Reflect. Client : No                Send Community      : both
Allow-AS in         : 0                  Advt. Interval      : 30
Max. Prefix          : 300000             Soft Reconfig In    :
Nexthop-Self         :                   Default-Originate   :
Cfg. Add-Path        :
Neg. Add-Path        :

Routemap In          :
Routemap Out         :
ORF type              : Prefix-list
ORF capability        :

```

PE1# **show bgp vpnv4 unicast**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths

Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 1.1.1.1

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1 (Label 20)					
*> 101.0.0.0/24	0.0.0.0	0	100	0	100 i
Route Distinguisher: 2:1 (Label 22)					
*> 102.0.0.0/24	0.0.0.0	0	100	0	100 i
Route Distinguisher: 1:3 (Label 21)					
*>i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
Route Distinguisher: 2:3 (Label 22)					
*>i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
Total number of entries 6					

PE1# **show bgp all-vrf all summary**

VRF : default

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 1.1.1.1
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
4.4.4.4	6488163	43	36	00h:27m:27s	Established	Up
5.5.5.5	6488163	39	34	00h:27m:12s	Established	Up

Address-family : L2VPN EVPN

VRF : vrf_1

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.3.1.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.1.1.1	100	36	37	00h:28m:34s	Established	Up
20.3.1.1	100	36	36	00h:28m:34s	Established	Up

Address-family : IPv6 Unicast

VRF : vrf_2

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.3.1.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.1.1.1	100	40	37	00h:28m:33s	Established	Up
20.3.1.1	100	40	38	00h:28m:42s	Established	Up

Address-family : IPv6 Unicast

PE1# show bgp all-vrf all

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 1.1.1.1

Address-family : IPv4 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : IPv6 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Total number of entries 0					

Address-family : VPNv4 Unicast

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1					
(Label 20)					
*> 101.0.0.0/24	0.0.0.0	0	100	0	100 i
Route Distinguisher: 2:1					
(Label 22)					
*> 102.0.0.0/24	0.0.0.0	0	100	0	100 i
Route Distinguisher: 1:3					
(Label 21)					
*>i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
Route Distinguisher: 2:3					
(Label 22)					
*>i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
Total number of entries 6					

Address-family : L2VPN EVPN

```

      Network
      LocPrf    Weight    Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.3.1.2

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
*=e 101.0.0.0/24      20.1.1.1      0         100      0      100 i
*>e 101.0.0.0/24      20.3.1.1      0         100      0      100 i
*>  201.0.0.0/24      3.3.3.3       0         100      0      100 i
Total number of entries 3

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.3.1.2

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
*=e 102.0.0.0/24      20.1.1.1      0         100      0      100 i
*>e 102.0.0.0/24      20.3.1.1      0         100      0      100 i
*>  202.0.0.0/24      3.3.3.3       0         100      0      100 i
Total number of entries 3

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
Total number of entries 0

```

PE1# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
IA - OSPF internal area, E1 - OSPF external type 1
E2 - OSPF external type 2

VRF: default

```

Prefix          Nexthop      Interface      VRF(egress)  Origin/
Distance/      Age
-----
1.1.1.1/32      -          loopback0      -             L
[0/0]           -
2.2.2.2/32      30.0.3.2   1/1/40         -             O
[110/200]       01h:12m:16s
                  30.0.0.2   1/1/39         -
[110/200]       01h:12m:16s

```

```

3.3.3.3/32      30.0.3.2      1/1/40      -      O
[110/150]      01h:11m:52s      30.0.0.2      1/1/39      -
[110/150]      01h:11m:52s      30.0.0.2      1/1/39      -
4.4.4.4/32      30.0.0.2      1/1/39      -      O
[110/100]      01h:13m:07s
5.5.5.5/32      30.0.3.2      1/1/40      -      O
[110/100]      01h:12m:46s
30.0.0.0/24      -      1/1/39      -      C
[0/0]      -
30.0.0.1/32      -      1/1/39      -      L
[0/0]      -
30.0.1.0/24      30.0.0.2      1/1/39      -      O
[110/200]      01h:13m:07s
30.0.2.0/24      30.0.0.2      1/1/39      -      O
[110/150]      01h:12m:42s
30.0.3.0/24      -      1/1/40      -      C
[0/0]      -
30.0.3.1/32      -      1/1/40      -      L
[0/0]      -
30.0.4.0/24      30.0.3.2      1/1/40      -      O
[110/200]      01h:12m:46s
30.0.5.0/24      30.0.3.2      1/1/40      -      O
[110/150]      01h:12m:41s

```

VRF: vrf_1

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.1.1.0/24	-	vlan2011	-	C	
[0/0]	-				
20.1.1.2/32	-	vlan2011	-	L	
[0/0]	-				
20.3.1.0/24	-	vlan2031	-	C	
[0/0]	-				
20.3.1.2/32	-	vlan2031	-	L	
[0/0]	-				
101.0.0.0/24	20.3.1.1	vlan2031	-	B/E	
[20/0]	01h:11m:55s				
	20.1.1.1	vlan2011	-		
[20/0]	01h:11m:55s				
201.0.0.0/24	3.3.3.3	1/1/40	default	B/V	
[200/0]	01h:10m:34s				

VRF: vrf_2

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.1.1.0/24	-	vlan2012	-	C	
[0/0]	-				
20.1.1.2/32	-	vlan2012	-	L	
[0/0]	-				
20.3.1.0/24	-	vlan2032	-	C	
[0/0]	-				
20.3.1.2/32	-	vlan2032	-	L	
[0/0]	-				

102.0.0.0/24	20.3.1.1	vlan2032	-	B/E
[20/0]	00h:54m:06s			
	20.1.1.1	vlan2012	-	
[20/0]	00h:54m:06s			
202.0.0.0/24	3.3.3.3	1/1/40	default	B/V
[200/0]	00h:54m:06s			

Total Route Count : 25

PE2 configuration

```

PE2# show running
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001BF
!export-password: default
hostname PE2
profile core-spine
logging console severity crit
vrf vrf_1
  rd 1:1
  l3vpn-only
  address-family ipv4 unicast
    route-target export 1:1
    route-target import 1:1
  exit-address-family
vrf vrf_2
  rd 2:1
  l3vpn-only
  address-family ipv4 unicast
    route-target export 2:1
    route-target import 2:1
  exit-address-family
cli-session
  timeout 0
!
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2021-2022,2041-2042
interface mgmt
  no shutdown
  ip dhcp
interface 1/1/43
  no shutdown
  mtu 9000
  description Towards CE1
  no routing
  vlan trunk native 1
  vlan trunk allowed 2021-2022
interface 1/1/44
  no shutdown
  mtu 9000
  description Towards CE2
  no routing
  vlan trunk native 1
  vlan trunk allowed 2041-2042

```

```

interface 1/1/45
  no shutdown
  mtu 9198
  description Towards P1
  ip mtu 9198
  ip address 30.0.1.1/24
  ip ospf 1 area 0.0.0.0
  mpls enable
  mpls ldp enable
interface 1/1/46
  no shutdown
  mtu 9198
  description Towards P2
  ip mtu 9198
  ip address 30.0.4.1/24
  ip ospf 1 area 0.0.0.0
  mpls enable
  mpls ldp enable
interface loopback 0
  ip address 2.2.2.2/32
  ip ospf 1 area 0.0.0.0
interface vlan 2021
  vrf attach vrf_1
  description Towards CE1
  ip mtu 9000
  ip address 20.2.1.2/24
interface vlan 2022
  vrf attach vrf_2
  description Towards CE1
  ip mtu 9000
  ip address 20.2.1.2/24
interface vlan 2041
  vrf attach vrf_1
  description Towards CE2
  ip mtu 9000
  ip address 20.4.1.2/24
interface vlan 2042
  vrf attach vrf_2
  description Towards CE2
  ip mtu 9000
  ip address 20.4.1.2/24
!
ip community-list standard sitel_community description For_setting_community_From_Sitel
ip community-list standard sitel_community seq 10 permit 99:99
!
!
!
route-map rmap1 permit seq 10
  description For_setting_community_For_Sitel_Received_EBGP_routes
  set community 99:99
route-map rmap2 deny seq 10
  description For_Denying_routes_with_Sitel_community_To_EBGP_Peer
  match community-list sitel_community
route-map rmap2 permit seq 20
  description For_Allowing_all_other_route
!
router ospf 1
  area 0.0.0.0
router bgp 6488163
  neighbor 4.4.4.4 remote-as 6488163
  neighbor 4.4.4.4 description Towards RR1{P1}

```

```

neighbor 4.4.4.4 update-source loopback 0
neighbor 5.5.5.5 remote-as 6488163
neighbor 5.5.5.5 description Towards RR2{P2}
neighbor 5.5.5.5 update-source loopback 0
address-family vpnv4 unicast
    neighbor 4.4.4.4 activate
    neighbor 4.4.4.4 send-community both
    neighbor 5.5.5.5 activate
    neighbor 5.5.5.5 send-community both
exit-address-family
!
vrf vrf_1
    neighbor 20.2.1.1 remote-as 100
    neighbor 20.2.1.1 description Towards CE1
    neighbor 20.4.1.1 remote-as 100
    neighbor 20.4.1.1 description Towards CE2
    address-family ipv4 unicast
        neighbor 20.2.1.1 activate
        neighbor 20.2.1.1 route-map rmap1 in
        neighbor 20.2.1.1 route-map rmap2 out
        neighbor 20.2.1.1 send-community both
        neighbor 20.2.1.1 soft-reconfiguration inbound
        neighbor 20.4.1.1 activate
        neighbor 20.4.1.1 route-map rmap1 in
        neighbor 20.4.1.1 route-map rmap2 out
        neighbor 20.4.1.1 send-community both
        neighbor 20.4.1.1 soft-reconfiguration inbound
    exit-address-family
!
vrf vrf_2
    neighbor 20.2.1.1 remote-as 100
    neighbor 20.2.1.1 description Towards CE1
    neighbor 20.4.1.1 remote-as 100
    neighbor 20.4.1.1 description Towards CE2
    address-family ipv4 unicast
        neighbor 20.2.1.1 activate
        neighbor 20.2.1.1 route-map rmap1 in
        neighbor 20.2.1.1 route-map rmap2 out
        neighbor 20.2.1.1 send-community both
        neighbor 20.2.1.1 soft-reconfiguration inbound
        neighbor 20.4.1.1 activate
        neighbor 20.4.1.1 route-map rmap1 in
        neighbor 20.4.1.1 route-map rmap2 out
        neighbor 20.4.1.1 send-community both
        neighbor 20.4.1.1 soft-reconfiguration inbound
    exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
    enable
    router-id loopback0

```

PE2# **show ip ospf neighbors**

VRF : default Process : 1

=====

Total Number of Neighbors : 2

Neighbor ID	Priority	State	Nbr Address	Interface
-------------	----------	-------	-------------	-----------

4.4.4.4	1	FULL/DR	30.0.1.2	1/1/45
5.5.5.5	1	FULL/BDR	30.0.4.2	1/1/46

```

PE2# show mpls ldp neighbor
Local LDP Identifier: 2.2.2.2:0, Peer LDP Identifier: 4.4.4.4:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:13:36
  State: operational
  LDP Discovery Sources: 1/1/45
  Addresses bound to this peer:
    30.0.0.2 30.0.1.2 30.0.2.1 4.4.4.4

Local LDP Identifier: 2.2.2.2:0, Peer LDP Identifier: 5.5.5.5:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:13:14
  State: operational
  LDP Discovery Sources: 1/1/46
  Addresses bound to this peer:
    30.0.3.2 30.0.4.2 30.0.5.1 5.5.5.5

```

```

PE2# show mpls ldp binding
30.0.3.2/32
  No local binding
  remote binding: lsr:5.5.5.5:0 label: exp-null
4.4.4.4/32
  local binding: label: 17
  remote binding: lsr:5.5.5.5:0 label:17
  remote binding: lsr:4.4.4.4:0 label: exp-null
30.0.4.2/32
  No local binding
  remote binding: lsr:5.5.5.5:0 label: exp-null
3.3.3.3/32
  local binding: label: 19
  remote binding: lsr:5.5.5.5:0 label:19
  remote binding: lsr:4.4.4.4:0 label:19
5.5.5.5/32
  local binding: label: 18
  remote binding: lsr:5.5.5.5:0 label: exp-null
  remote binding: lsr:4.4.4.4:0 label:17
30.0.1.1/32
  local binding: label: exp-null
  No remote binding
30.0.1.2/32
  No local binding
  remote binding: lsr:4.4.4.4:0 label: exp-null
30.0.4.1/32
  local binding: label: exp-null
  No remote binding
1.1.1.1/32
  local binding: label: 16
  remote binding: lsr:5.5.5.5:0 label:16
  remote binding: lsr:4.4.4.4:0 label:16
30.0.0.2/32
  No local binding
  remote binding: lsr:4.4.4.4:0 label: exp-null
2.2.2.2/32

```

```

    local binding: label: exp-null
    remote binding: lsr:5.5.5.5:0 label:18
    remote binding: lsr:4.4.4.4:0 label:18
30.0.5.1/32
    No local binding
    remote binding: lsr:5.5.5.5:0 label: exp-null
30.0.2.1/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null

```

PE2# show mpls forwarding

MPLS Bindings

```

Entry Bindings    : 8
Exit Bindings     : 4
Transit Bindings  : 6
PHP Mode          : Explicit-Null
QoS Mode          : Uniform
TTL Propagation   : Uniform

```

Entry Bindings:

Origin Egress	Prefix Egress	Ingress Status VRF	Nexthop Address	Outgoing Label
Interface	VRF			

LDP	1.1.1.1/32	default	30.0.1.2	16
1/1/45	default	operational		
LDP	1.1.1.1/32	default	30.0.4.2	16
1/1/46	default	operational		
LDP	3.3.3.3/32	default	30.0.4.2	19
1/1/46	default	operational		
LDP	3.3.3.3/32	default	30.0.1.2	19
1/1/45	default	operational		
LDP	4.4.4.4/32	default	30.0.1.2	exp-null
1/1/45	default	operational		
LDP	5.5.5.5/32	default	30.0.4.2	exp-null
1/1/46	default	operational		
BGP	201.0.0.0/24	vrf_1	3.3.3.3	21
1/1/46	default	operational		
BGP	202.0.0.0/24	vrf_2	3.3.3.3	22
1/1/46	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status

static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	20	vrf_1	operational
BGP	n/a	imp-null	22	vrf_2	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix Outgoing	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
--------	--------------------	--------	-------------------	---------------------	---------------	--------------------

Label					

LDP	1.1.1.1/32	16	1/1/45	default	30.0.1.2
	16	operational			
LDP	1.1.1.1/32	16	1/1/46	default	30.0.4.2
	16	operational			
LDP	4.4.4.4/32	17	1/1/45	default	30.0.1.2
	exp-null	operational			
LDP	5.5.5.5/32	18	1/1/46	default	30.0.4.2
	exp-null	operational			
LDP	3.3.3.3/32	19	1/1/45	default	30.0.1.2
	19	operational			
LDP	3.3.3.3/32	19	1/1/46	default	30.0.4.2
	19	operational			

PE2# **show bgp vpnv4 un neighbors**

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 4.4.4.4 (Internal)

Description : Towards RR1{P1}

Peer-group :

Remote Router Id	: 4.4.4.4	Local Router Id	: 2.2.2.2
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 44703
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:15m:21s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	-----	-----
Open	1	1
Notification	0	0
Updates	3	5
Keepalives	18	17
Route Refresh	0	0
Total	22	23

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes

Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 5.5.5.5 (Internal)

Description	: Towards RR2{P2}
Peer-group	:

Remote Router Id	: 5.5.5.5	Local Router Id	: 2.2.2.2
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 33107	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:15m:30s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	5
Keepalives	17	17
Route Refresh	0	0
Total	21	23

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes

Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

PE2# **show bgp vpnv4 unicast**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 2.2.2.2

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1 (Label 20)					
*> 101.0.0.0/24	0.0.0.0	0	100	0	100 i
* i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 101.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 2:1 (Label 22)					
*> 102.0.0.0/24	0.0.0.0	0	100	0	100 i
* i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
* i 102.0.0.0/24	1.1.1.1	0	100	0	100 i
Route Distinguisher: 1:3 (Label 21)					
*>i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 201.0.0.0/24	3.3.3.3	0	100	0	100 i
Route Distinguisher: 2:3 (Label 22)					
*>i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
* i 202.0.0.0/24	3.3.3.3	0	100	0	100 i
Total number of entries 10					

PE2# **show bgp all-vrf all summary**

VRF : default

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 2.2.2.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
4.4.4.4	6488163	40	37	00h:26m:53s	Established	Up
5.5.5.5	6488163	41	35	00h:27m:02s	Established	Up

Address-family : L2VPN EVPN

VRF : vrf_1

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.4.1.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.2.1.1	100	35	35	00h:28m:01s	Established	Up
20.4.1.1	100	35	35	00h:27m:58s	Established	Up

Address-family : IPv6 Unicast

VRF : vrf_2

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.4.1.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.2.1.1	100	38	38	00h:27m:57s	Established	Up
20.4.1.1	100	38	37	00h:27m:56s	Established	Up

Address-family : IPv6 Unicast

PE2# **show bgp all-vrf all**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 2.2.2.2

Address-family : IPv4 Unicast

```

-----
      Network          Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

Address-family : VPNv4 Unicast
-----
      Network          Nexthop      Metric      LocPrf      Weight Path

Route Distinguisher: 1:1              (Label 20)
*> 101.0.0.0/24      0.0.0.0      0          100          0          100 i
* i 101.0.0.0/24      1.1.1.1      0          100          0          100 i
* i 101.0.0.0/24      1.1.1.1      0          100          0          100 i

Route Distinguisher: 2:1              (Label 22)
*> 102.0.0.0/24      0.0.0.0      0          100          0          100 i
* i 102.0.0.0/24      1.1.1.1      0          100          0          100 i
* i 102.0.0.0/24      1.1.1.1      0          100          0          100 i

Route Distinguisher: 1:3              (Label 21)
*>i 201.0.0.0/24      3.3.3.3      0          100          0          100 i
* i 201.0.0.0/24      3.3.3.3      0          100          0          100 i

Route Distinguisher: 2:3              (Label 22)
*>i 202.0.0.0/24      3.3.3.3      0          100          0          100 i
* i 202.0.0.0/24      3.3.3.3      0          100          0          100 i
Total number of entries 10

Address-family : L2VPN EVPN
-----
      Network          Nexthop      Metric
      LocPrf      Weight      Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.4.1.2

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric      LocPrf      Weight Path
*>= 101.0.0.0/24      20.2.1.1      0          100          0          100 i
*>e 101.0.0.0/24      20.4.1.1      0          100          0          100 i
*> 201.0.0.0/24      3.3.3.3      0          100          0          100 i
Total number of entries 3

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.4.1.2

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric      LocPrf      Weight Path

```

```

*=e 102.0.0.0/24      20.2.1.1      0      100      0      100 i
*>e 102.0.0.0/24      20.4.1.1      0      100      0      100 i
*> 202.0.0.0/24      3.3.3.3      0      100      0      100 i
Total number of entries 3

```

Address-family : IPv6 Unicast

```

-----
Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

```

PE2# show ip route all-vrf

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: default

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric
1.1.1.1/32 [110/200]	30.0.1.2 01h:12m:16s	1/1/45	-	O	
[110/200]	30.0.4.2 01h:12m:16s	1/1/46	-		
2.2.2.2/32 [0/0]	- -	loopback0	-	L	
3.3.3.3/32 [110/150]	30.0.1.2 01h:11m:52s	1/1/45	-	O	
[110/150]	30.0.4.2 01h:11m:52s	1/1/46	-		
4.4.4.4/32 [110/100]	30.0.1.2 01h:12m:33s	1/1/45	-	O	
5.5.5.5/32 [110/100]	30.0.4.2 01h:12m:16s	1/1/46	-	O	
30.0.0.0/24 [110/200]	30.0.1.2 01h:12m:33s	1/1/45	-	O	
30.0.1.0/24 [0/0]	- -	1/1/45	-	C	
30.0.1.1/32 [0/0]	- -	1/1/45	-	L	
30.0.2.0/24 [110/150]	30.0.1.2 01h:12m:33s	1/1/45	-	O	
30.0.3.0/24 [110/200]	30.0.4.2 01h:12m:16s	1/1/46	-	O	
30.0.4.0/24 [0/0]	- -	1/1/46	-	C	
30.0.4.1/32 [0/0]	- -	1/1/46	-	L	
30.0.5.0/24 [110/150]	30.0.4.2 01h:12m:16s	1/1/46	-	O	

VRF: vrf_1

Prefix	Nexthop	Interface	VRF(egress)	Origin/
--------	---------	-----------	-------------	---------

Distance/	Age			Type	Metric
20.2.1.0/24	-	-	vlan2021	-	C
[0/0]	-	-	vlan2021	-	L
20.2.1.2/32	-	-	vlan2021	-	L
[0/0]	-	-	vlan2041	-	C
20.4.1.0/24	-	-	vlan2041	-	C
[0/0]	-	-	vlan2041	-	L
20.4.1.2/32	-	-	vlan2041	-	L
[0/0]	-	-	vlan2041	-	B/E
101.0.0.0/24	20.4.1.1	-	vlan2041	-	B/E
[20/0]	01h:11m:55s	-	vlan2021	-	
	20.2.1.1	-	vlan2021	-	
[20/0]	01h:11m:55s	-	vlan2021	-	
201.0.0.0/24	3.3.3.3	1/1/46	default	B/V	
[200/0]	01h:10m:34s				

VRF: vrf_2

Prefix	Age	NextHop	Interface	VRF (egress)	Origin/
Distance/	Age				Type
20.2.1.0/24	-	-	vlan2022	-	C
[0/0]	-	-	vlan2022	-	L
20.2.1.2/32	-	-	vlan2022	-	L
[0/0]	-	-	vlan2042	-	C
20.4.1.0/24	-	-	vlan2042	-	C
[0/0]	-	-	vlan2042	-	L
20.4.1.2/32	-	-	vlan2042	-	L
[0/0]	-	-	vlan2042	-	B/E
102.0.0.0/24	20.4.1.1	-	vlan2042	-	B/E
[20/0]	00h:54m:06s	-	vlan2022	-	
	20.2.1.1	-	vlan2022	-	
[20/0]	00h:54m:06s	-	vlan2022	-	
202.0.0.0/24	3.3.3.3	1/1/46	default	B/V	
[200/0]	00h:54m:06s				

Total Route Count : 25

PE3 configuration

```

PE3# show running
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001BF
!export-password: default
hostname PE3
profile core-spine
logging console severity crit
vrf vrf_1
  rd 1:3
  l3vpn-only
  address-family ipv4 unicast
    route-target export 1:1
    route-target import 1:1
  exit-address-family

```

```

vrf vrf_2
  rd 2:3
  l3vpn-only
  address-family ipv4 unicast
    route-target export 2:1
    route-target import 2:1
  exit-address-family
cli-session
  timeout 0
!
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2051-2052
interface mgmt
  no shutdown
  ip dhcp
system interface-group 1 speed 10g
  !interface group 1 contains ports 1/1/1-1/1/4
interface lag 99
  no shutdown
  description Towards P1
  ip mtu 9198
  ip address 30.0.2.2/24
  lacp mode active
  ip ospf 1 area 0.0.0.0
  mpls enable
  mpls ldp enable
interface lag 100
  no shutdown
  description Towards P2
  ip mtu 9198
  ip address 30.0.5.2/24
  lacp mode active
  ip ospf 1 area 0.0.0.0
  mpls enable
  mpls ldp enable
interface 1/1/19
  no shutdown
  mtu 9198
  description Towards P1
  lag 99
interface 1/1/20
  no shutdown
  mtu 9198
  description Towards P1
  lag 99
interface 1/1/21
  no shutdown
  mtu 9000
  description Towards CE3
  no routing
  vlan trunk native 1
  vlan trunk allowed 2051-2052
interface 1/1/22
  no shutdown
  mtu 9198
  description Towards P2
  lag 100

```

```

interface 1/1/23
    no shutdown
    mtu 9198
    description Towards P2
    lag 100
interface loopback 0
    ip address 3.3.3.3/32
    ip ospf 1 area 0.0.0.0
interface vlan 2051
    vrf attach vrf_1
    description Towards CE3
    ip mtu 9000
    ip address 20.5.1.1/24
interface vlan 2052
    vrf attach vrf_2
    description Towards CE3
    ip mtu 9000
    ip address 20.5.1.1/24
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 4.4.4.4 remote-as 6488163
    neighbor 4.4.4.4 description Towards RR1{P1}
    neighbor 4.4.4.4 update-source loopback 0
    neighbor 5.5.5.5 remote-as 6488163
    neighbor 5.5.5.5 description Towards RR2{P2}
    neighbor 5.5.5.5 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 4.4.4.4 activate
        neighbor 4.4.4.4 send-community both
        neighbor 5.5.5.5 activate
        neighbor 5.5.5.5 send-community both
    exit-address-family
!
vrf vrf_1
    neighbor 20.5.1.2 remote-as 100
    neighbor 20.5.1.2 description Towards CE3
    address-family ipv4 unicast
        neighbor 20.5.1.2 activate
        neighbor 20.5.1.2 send-community both
        neighbor 20.5.1.2 soft-reconfiguration inbound
    exit-address-family
!
vrf vrf_2
    neighbor 20.5.1.2 remote-as 100
    neighbor 20.5.1.2 description Towards CE3
    address-family ipv4 unicast
        neighbor 20.5.1.2 activate
        neighbor 20.5.1.2 send-community both
        neighbor 20.5.1.2 soft-reconfiguration inbound
    exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
    enable

```

```
router-id loopback0
```

PE3 verification

```
PE3# show ip ospf neighbors
```

```
VRF : default Process : 1
```

```
=====
```

```
Total Number of Neighbors : 2
```

Neighbor ID	Priority	State	Nbr Address	Interface
5.5.5.5	1	FULL/DR	30.0.5.1	lag100
4.4.4.4	1	FULL/DR	30.0.2.1	lag99

```
PE3# show mpls ldp neighbor
```

```
Local LDP Identifier: 3.3.3.3:0, Peer LDP Identifier: 4.4.4.4:0
```

```
Graceful Restart: No
```

```
Session Holdtime: 40 sec
```

```
Up time: 00:12:42
```

```
State: operational
```

```
LDP Discovery Sources: lag99
```

```
Addresses bound to this peer:
```

```
30.0.0.2 30.0.1.2 30.0.2.1 4.4.4.4
```

```
Local LDP Identifier: 3.3.3.3:0, Peer LDP Identifier: 5.5.5.5:0
```

```
Graceful Restart: No
```

```
Session Holdtime: 40 sec
```

```
Up time: 00:12:42
```

```
State: operational
```

```
LDP Discovery Sources: lag100
```

```
Addresses bound to this peer:
```

```
30.0.3.2 30.0.4.2 30.0.5.1 5.5.5.5
```

```
PE3# show mpls ldp binding
```

```
30.0.5.2/32
```

```
local binding: label: exp-null
```

```
No remote binding
```

```
2.2.2.2/32
```

```
local binding: label: 17
```

```
remote binding: lsr:5.5.5.5:0 label:18
```

```
remote binding: lsr:4.4.4.4:0 label:18
```

```
30.0.1.2/32
```

```
No local binding
```

```
remote binding: lsr:4.4.4.4:0 label: exp-null
```

```
4.4.4.4/32
```

```
local binding: label: 18
```

```
remote binding: lsr:5.5.5.5:0 label:17
```

```
remote binding: lsr:4.4.4.4:0 label: exp-null
```

```
30.0.4.2/32
```

```
No local binding
```

```
remote binding: lsr:5.5.5.5:0 label: exp-null
```

```
30.0.5.1/32
```

```
No local binding
```

```
remote binding: lsr:5.5.5.5:0 label: exp-null
```

```
30.0.3.2/32
```

```

    No local binding
    remote binding: lsr:5.5.5.5:0 label: exp-null
30.0.2.2/32
    local binding: label: exp-null
    No remote binding
30.0.0.2/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null
1.1.1.1/32
    local binding: label: 16
    remote binding: lsr:5.5.5.5:0 label:16
    remote binding: lsr:4.4.4.4:0 label:16
5.5.5.5/32
    local binding: label: 19
    remote binding: lsr:5.5.5.5:0 label: exp-null
    remote binding: lsr:4.4.4.4:0 label:17
3.3.3.3/32
    local binding: label: exp-null
    remote binding: lsr:5.5.5.5:0 label:19
    remote binding: lsr:4.4.4.4:0 label:19
30.0.2.1/32
    No local binding
    remote binding: lsr:4.4.4.4:0 label: exp-null

```

PE3# **show mpls forwarding**

MPLS Bindings

```

Entry Bindings   : 8
Exit Bindings    : 4
Transit Bindings : 6
PHP Mode         : Explicit-Null
QoS Mode         : Uniform
TTL Propagation  : Uniform

```

Entry Bindings:

Origin	Prefix	Ingress	Nextthop	Outgoing
Egress	Egress	Status	Address	Label
Interface	VRF	VRF		
LDP	1.1.1.1/32	default	30.0.5.1	16
lag100	default	operational		
LDP	1.1.1.1/32	default	30.0.2.1	16
	default	operational		lag99
LDP	2.2.2.2/32	default	30.0.2.1	18
	default	operational		lag99
LDP	2.2.2.2/32	default	30.0.5.1	18
lag100	default	operational		
LDP	4.4.4.4/32	default	30.0.2.1	exp-null
	default	operational		lag99
LDP	5.5.5.5/32	default	30.0.5.1	exp-null
lag100	default	operational		
BGP	101.0.0.0/24	vrf_1	1.1.1.1	20
lag100	default	operational		
BGP	102.0.0.0/24	vrf_2	1.1.1.1	22
lag100	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status
static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	21	vrf_1	operational
BGP	n/a	imp-null	22	vrf_2	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
	Outgoing Label					
LDP	1.1.1.1/32	16		lag100	default	30.0.5.1
	16	operational				
LDP	1.1.1.1/32	16		lag99	default	30.0.2.1
	16	operational				
LDP	2.2.2.2/32	17		lag100	default	30.0.5.1
	18	operational				
LDP	2.2.2.2/32	17		lag99	default	30.0.2.1
	18	operational				
LDP	4.4.4.4/32	18		lag99	default	30.0.2.1
	exp-null	operational				
LDP	5.5.5.5/32	19		lag100	default	30.0.5.1
	exp-null	operational				

PE3# show bgp vpnv4 un neighbors

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 4.4.4.4 (Internal)

Description : Towards RR1{P1}
Peer-group :

Remote Router Id	: 4.4.4.4	Local Router Id	: 3.3.3.3
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 33231	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:14m:47s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		
Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	3	3
Keepalives	17	18
Route Refresh	0	0
Total	21	22

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 5.5.5.5 (Internal)

Description	: Towards RR2{P2}
Peer-group	:

Remote Router Id	: 5.5.5.5	Local Router Id	: 3.3.3.3
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 39781	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:14m:45s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

```

Message statistics          Sent      Rcvd
-----
Open                       1        1
Notification               0        0
Updates                   3        3
Keepalives                17       17
Route Refresh              0        0
Total                     21       21

Capability                  Advertised    Received
-----
Route Refresh               Yes         Yes
Graceful Restart            Yes         Yes
Add-Path                    No          No
Four Octet ASN              Yes         Yes
Address family IPv4 Unicast No          No
Address family IPv6 Unicast No          No
Address family VPNv4 Unicast Yes         Yes
Address family L2VPN EVPN   No          No

Address Family : VPNv4 Unicast
-----

Rt. Reflect. Client : No          Send Community : both
Allow-AS in         : 0           Advt. Interval : 30
Max. Prefix         : 300000      Soft Reconfig In :
Nexthop-Self        :             Default-Originate :
Cfg. Add-Path       :
Neg. Add-Path       :

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

```

PE3# show bgp vpnv4 unicast
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 3.3.3.3

Network          Nexthop          Metric      LocPrf      Weight Path
Route Distinguisher: 1:1
*>i 101.0.0.0/24  1.1.1.1          0           100         0         100 i
* i 101.0.0.0/24  1.1.1.1          0           100         0         100 i

Route Distinguisher: 2:1
*>i 102.0.0.0/24  1.1.1.1          0           100         0         100 i
* i 102.0.0.0/24  1.1.1.1          0           100         0         100 i

Route Distinguisher: 1:3
*> 201.0.0.0/24   0.0.0.0          0           100         0         100 i

Route Distinguisher: 2:3
*> 202.0.0.0/24   0.0.0.0          0           100         0         100 i
Total number of entries 6

```

PE3# **show bgp all-vrf all summary**

VRF : default

BGP Summary

```
-----
Local AS           : 6488163      BGP Router Identifier : 3.3.3.3
Peers              : 2             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0
```

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

```
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
4.4.4.4       6488163    40      35      00h:26m:19s Established Up
5.5.5.5       6488163    39      36      00h:26m:17s Established Up
```

Address-family : L2VPN EVPN

VRF : vrf_1

BGP Summary

```
-----
Local AS           : 6488163      BGP Router Identifier : 20.5.1.1
Peers              : 1             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0
```

Address-family : IPv4 Unicast

```
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.5.1.2      100         33      34      00h:25m:12s Established Up
```

Address-family : IPv6 Unicast

VRF : vrf_2

BGP Summary

```
-----
Local AS           : 6488163      BGP Router Identifier : 20.5.1.1
Peers              : 1             Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0
```

Address-family : IPv4 Unicast

```
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.5.1.2      100         34      34      00h:25m:11s Established Up
```

Address-family : IPv6 Unicast

PE3# **show bgp all-vrf all**

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,

```

        i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 3.3.3.3

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
Total number of entries 0

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
Total number of entries 0

Address-family : VPNv4 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path

Route Distinguisher: 1:1          (Label 20)
*>i 101.0.0.0/24      1.1.1.1      0          100        0          100 i
* i 101.0.0.0/24      1.1.1.1      0          100        0          100 i

Route Distinguisher: 2:1          (Label 22)
*>i 102.0.0.0/24      1.1.1.1      0          100        0          100 i
* i 102.0.0.0/24      1.1.1.1      0          100        0          100 i

Route Distinguisher: 1:3          (Label 21)
*> 201.0.0.0/24      0.0.0.0      0          100        0          100 i

Route Distinguisher: 2:3          (Label 22)
*> 202.0.0.0/24      0.0.0.0      0          100        0          100 i
Total number of entries 6

Address-family : L2VPN EVPN
-----
      Network          Nexthop      Metric
      LocPrf    Weight    Path
-----
Total number of entries 0

VRF : vrf_1
Local Router-ID 20.5.1.1

Address-family : IPv4 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
*> 101.0.0.0/24      1.1.1.1      0          100        0          100 i
*>e 201.0.0.0/24      20.5.1.2      0          100        0          100 i
Total number of entries 2

Address-family : IPv6 Unicast
-----
      Network          Nexthop      Metric    LocPrf    Weight Path
Total number of entries 0

VRF : vrf_2
Local Router-ID 20.5.1.1

Address-family : IPv4 Unicast

```

```

-----
      Network      Nexthop      Metric      LocPrf      Weight Path
*> 102.0.0.0/24    1.1.1.1        0          100         0        100 i
*>e 202.0.0.0/24   20.5.1.2       0          100         0        100 i
Total number of entries 2

```

Address-family : IPv6 Unicast

```

-----
      Network      Nexthop      Metric      LocPrf      Weight Path
Total number of entries 0

```

PE3# **show ip route all-vrf**

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: default

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric
1.1.1.1/32 [110/150]	30.0.5.1 01h:11m:56s	lag100	-	O	
	30.0.2.1	lag99	-		
[110/150]	01h:11m:56s				
2.2.2.2/32 [110/150]	30.0.5.1 01h:11m:56s	lag100	-	O	
	30.0.2.1	lag99	-		
[110/150]	01h:11m:56s				
3.3.3.3/32 [0/0]	- -	loopback0	-	L	
4.4.4.4/32 [110/50]	30.0.2.1 01h:11m:57s	lag99	-	O	
5.5.5.5/32 [110/50]	30.0.5.1 01h:11m:56s	lag100	-	O	
30.0.0.0/24 [110/150]	30.0.2.1 01h:11m:57s	lag99	-	O	
30.0.1.0/24 [110/150]	30.0.2.1 01h:11m:57s	lag99	-	O	
30.0.2.0/24 [0/0]	- -	lag99	-	C	
30.0.2.2/32 [0/0]	- -	lag99	-	L	
30.0.3.0/24 [110/150]	30.0.5.1 01h:11m:56s	lag100	-	O	
30.0.4.0/24 [110/150]	30.0.5.1 01h:11m:56s	lag100	-	O	
30.0.5.0/24 [0/0]	- -	lag100	-	C	
30.0.5.2/32 [0/0]	- -	lag100	-	L	

VRF: vrf_1

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.5.1.0/24	-	-	vlan2051	-	C	
[0/0]	-	-				
20.5.1.1/32	-	-	vlan2051	-	L	
[0/0]	-	-				
101.0.0.0/24		1.1.1.1	lag100	default	B/V	
[200/0]	01h:11m:49s					
201.0.0.0/24		20.5.1.2	vlan2051	-	B/E	
[20/0]	01h:10m:34s					
VRF: vrf_2						
Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric


20.5.1.0/24	-	-	vlan2052	-	C	
[0/0]	-	-				
20.5.1.1/32	-	-	vlan2052	-	L	
[0/0]	-	-				
102.0.0.0/24		1.1.1.1	lag100	default	B/V	
[200/0]	00h:54m:06s					
202.0.0.0/24		20.5.1.2	vlan2052	-	B/E	
[20/0]	00h:54m:06s					
Total Route Count : 21						

Use case 2: MPLS L3 VPN with hub and spoke VRFs

This use case covers:

- An MPLS L3 VPN network with a shared hub VRF that has connectivity to spoke VRFs, while spoke VRFs that are isolated between each other
- CEs in hub VRF are expected to provide hub connectivity between CE spoke subnets (101.0.0.0/24 and 201.0.0.0/24) and hub subnets (151.0.0.0/24 and 0.0.0.0/0 default route)
- PE3 should not allow direct spoke to spoke connectivity, this is achieved through:
 - Using hub_import VRF to advertise spoke CE subnets from PE1/PE2 to CE3
 - Using hub_export VRF to advertise hub and spoke CE subnets from CE4 to PE1/PE2
- Sample configurations
- Relevant verification commands

MPLS L3 VPN with hub and spoke VRFs:

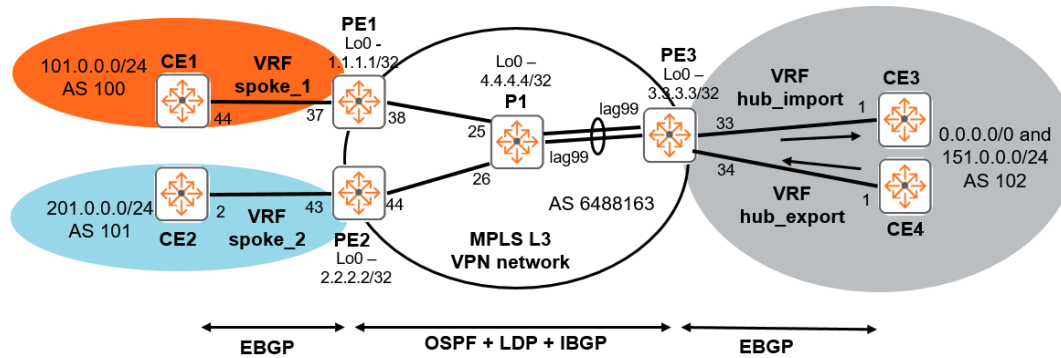

CE1 Configuration

```
CE1# show run Current configuration: ! !Version ArubaOS-CX TL.10.09.0001AX
!export-password: default hostname CE1 profile l3-core logging console severity
crit cli-session timeout 0 ! ! ! ! ! ssh server vrf mgmt vlan 1,2001,2071
interface mgmt no shutdown ip dhcp interface 1/1/43 no shutdown description
Towards 101 subnet no routing vlan trunk native 1 vlan trunk allowed 2071
interface 1/1/44 no shutdown description Towards PE1 no routing vlan trunk native
1 vlan trunk allowed 2001 interface vlan 2001 description Towards PE1 ip address
20.0.1.1/24 interface vlan 2071 description Towards 101 subnet ip address
20.7.1.2/24 ip ospf 1 area 0.0.0.0 ! ! ! ! ! router ospf 1 area 0.0.0.0 router bgp
100 neighbor 20.0.1.2 remote-as 6488163 neighbor 20.0.1.2 description Towards PE1
neighbor 20.7.1.1 remote-as 100 neighbor 20.7.1.1 description Towards 101 subnet
address-family ipv4 unicast neighbor 20.0.1.2 activate neighbor 20.0.1.2 send-
community both neighbor 20.0.1.2 soft-reconfiguration inbound neighbor 20.7.1.1
activate neighbor 20.7.1.1 next-hop-self exit-address-family ! https-server vrf
mgmt
```

CE1 Verification

```
CE1# show bgp ipv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 20.0.1.2 (External)
  Description      : Towards PE1
  Peer-group      :

  Remote Router Id : 20.0.1.2          Local Router Id   : 20.7.1.2
  Remote AS        : 6488163          Local AS          : 100
  Remote Port      : 57770            Local Port        : 179
  State            : Established       Admin Status      : Up
  Conn. Established : 1                Conn. Dropped     : 0
  Passive          : No                Update-Source     :
  Cfg. Hold Time   : 180                Cfg. Keep Alive   : 60
  Neg. Hold Time   : 180                Neg. Keep Alive   : 60
  Up/Down Time     : 00h:23m:45s        Connect-Retry Time : 120
  Local-AS Prepend : No                Alt. Local-AS     : 0
  BFD              : Disabled
  Password         :
  Last Err Sent    : Cease
  Last SubErr Sent : Administrative Shutdown
  Last Err Rcvd    : No Error
  Last SubErr Rcvd : No Error

  Graceful-Restart : Enabled            Gr. Restart Time  : 120
```

Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 1	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	-----	-----
Open	1	1
Notification	0	0
Updates	2	9
Keepalives	27	23
Route Refresh	0	0
Total	30	33

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	Yes	Yes
Address family IPv6 Unicast	No	No

Address Family : IPv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 128000	Soft Reconfig In	: Yes
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	: Disable		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 20.7.1.1 (Internal)

Description	: Towards Ixial-SPOKE1
Peer-group	:

Remote Router Id	: 196.0.0.1	Local Router Id	: 20.7.1.2
Remote AS	: 100	Local AS	: 100
Remote Port	: 32802	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	:
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 90	Neg. Keep Alive	: 30
Up/Down Time	: 00h:20m:28s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:

```

Weight          : 0                      Fall-over      : No
Confederation-Peers : No

Message statistics      Sent      Rcvd
-----
Open                   1          1
Notification           0          0
Updates                8          1
Keepalives             45         42
Route Refresh          0          0
Total                  54         44

Capability              Advertised   Received
-----
Route Refresh           Yes         Yes
Graceful Restart        Yes         No
Add-Path                No         No
Four Octet ASN          Yes         No
Address family IPv4 Unicast Yes         Yes
Address family IPv6 Unicast No         Yes

Address Family : IPv4 Unicast
-----

Rt. Reflect. Client : No                Send Community :
Allow-AS in          : 0                  Advt. Interval  : 30
Max. Prefix          : 128000             Soft Reconfig In :
Nexthop-Self         : Yes                Default-Originate :
Cfg. Add-Path        :
Neg. Add-Path        : Disable

Routemap In          :
Routemap Out         :
ORF type              : Prefix-list
ORF capability        :

CE1#

CE1# show bgp ipv4 unicast
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 20.7.1.2

      Network      Nexthop      Metric      LocPrf      Weight Path
*>e 0.0.0.0/0      20.0.1.2      0           100         0         6488163 102 ?
*>e 20.4.1.0/24     20.0.1.2      0           100         0         6488163 102 ?
*>e 20.5.1.0/24     20.0.1.2      0           100         0         6488163 102 ?
*>e 20.6.1.0/24     20.0.1.2      0           100         0         6488163 102 ?
*>i 101.0.0.0/24    20.7.1.1      0           100         0         i
*>e 151.0.0.0/24    20.0.1.2      0           100         0         6488163 102 ?
*>e 201.0.0.0/24    20.0.1.2      0           100         0         6488163 102 ?
Total number of entries 7

CE1#

CE1# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS          : 100                BGP Router Identifier : 20.7.1.2

```

```

Peers                : 2                Log Neighbor Changes : No
Cfg. Hold Time       : 180              Cfg. Keep Alive      : 60
Confederation Id     : 0

Address-family : IPv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.2      6488163   40      37      00h:29m:45s Established Up
20.7.1.1      100       56      68      00h:26m:28s Established Up

Address-family : IPv6 Unicast
-----

CE1#

CE1# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
              R - RIP, B - BGP, O - OSPF
Type Codes:  E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
              IA - OSPF internal area, E1 - OSPF external type 1
              E2 - OSPF external type 2

VRF: default

Prefix          Nexthop          Interface      VRF(egress)  Origin/
Distance/      Age
-----
0.0.0.0/0      20.0.1.2      vlan2001      -            B/E
[20/0]         00h:23m:22s
20.0.1.0/24    -            vlan2001      -            C
[0/0]         -
20.0.1.1/32    -            vlan2001      -            L
[0/0]         -
20.4.1.0/24    20.0.1.2      vlan2001      -            B/E
[20/0]         00h:29m:54s
20.5.1.0/24    20.0.1.2      vlan2001      -            B/E
[20/0]         00h:30m:36s
20.6.1.0/24    20.0.1.2      vlan2001      -            B/E
[20/0]         00h:24m:12s
20.7.1.0/24    -            vlan2071      -            C
[0/0]         -
20.7.1.2/32    -            vlan2071      -            L
[0/0]         -
101.0.0.0/24   20.7.1.1      vlan2071      -            B/I
[200/0]        00h:28m:22s
151.0.0.0/24   20.0.1.2      vlan2001      -            B/E
[20/0]         00h:23m:22s
201.0.0.0/24   20.0.1.2      vlan2001      -            B/E
[20/0]         00h:28m:22s

Total Route Count : 11

```

CE2 Configuration

```

CE2# show run
Current configuration:
!
!Version ArubaOS-CX TL.10.09.0001AX
!export-password: default
hostname CE2
profile l3-core
logging console severity crit
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2011,2081
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/1
    no shutdown
    description Towards 201 subnet
    no routing
    vlan trunk native 1
    vlan trunk allowed 2081
interface 1/1/2
    no shutdown
    description Towards PE2
    no routing
    vlan trunk native 1
    vlan trunk allowed 2011
interface vlan 2011
    description Towards PE2
    ip address 20.1.1.1/24
interface vlan 2081
    description Towards 201 subnet
    ip address 20.8.1.2/24
    ip ospf 1 area 0.0.0.0
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 101
    neighbor 20.1.1.2 remote-as 6488163
    neighbor 20.1.1.2 description Towards PE2
    neighbor 20.8.1.1 remote-as 101
    neighbor 20.8.1.1 description Towards 201 subnet
    address-family ipv4 unicast
        neighbor 20.1.1.2 activate
        neighbor 20.1.1.2 send-community both
        neighbor 20.1.1.2 soft-reconfiguration inbound
        neighbor 20.8.1.1 activate
        neighbor 20.8.1.1 next-hop-self
    exit-address-family
!
https-server vrf mgmt

```

CE2 Verification

```
CE2# show bgp ipv4 unicast neighbors
Codes: ^ Inherited from peer-group
```

```
VRF : default
```

```
BGP Neighbor 20.1.1.2 (External)
```

```
Description      : Towards PE2
Peer-group       :
```

Remote Router Id	: 20.1.1.2	Local Router Id	: 20.8.1.2
Remote AS	: 6488163	Local AS	: 101
Remote Port	: 60400	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	:
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:23m:27s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: Cease		
Last SubErr Sent	: Administrative Shutdown		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 1	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	2	9
Keepalives	26	22
Route Refresh	0	0
Total	29	32

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	Yes	Yes
Address family IPv6 Unicast	No	No

```
Address Family : IPv4 Unicast
```

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 128000	Soft Reconfig In	: Yes
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	: Disable		

```
Routemap In      :
Routemap Out     :
```

```

ORF type           : Prefix-list
ORF capability      :

BGP Neighbor 20.8.1.1 (Internal)
Description         : Towards Ixia2-SPOKE2
Peer-group          :

Remote Router Id    : 195.0.0.1          Local Router Id    : 20.8.1.2
Remote AS           : 101                Local AS           : 101
Remote Port         : 32798              Local Port         : 179
State               : Established         Admin Status       : Up
Conn. Established   : 1                  Conn. Dropped      : 0
Passive             : No                 Update-Source       : 
Cfg. Hold Time      : 180                Cfg. Keep Alive    : 60
Neg. Hold Time      : 90                 Neg. Keep Alive     : 30
Up/Down Time        : 00h:20m:27s        Connect-Retry Time : 120
Local-AS Prepend    : No                 Alt. Local-AS      : 0
BFD                 : Disabled
Password            : 
Last Err Sent       : No Error
Last SubErr Sent    : No Error
Last Err Rcvd       : No Error
Last SubErr Rcvd    : No Error

Graceful-Restart     : Enabled            Gr. Restart Time   : 120
Gr. Stalepath Time   : 300               Remove Private-AS  : No
TTL                  : 255               Local Cluster-ID    : 
Weight              : 0                  Fall-over           : No
Confederation-Peers : No

Message statistics    Sent      Rcvd
-----
Open                  1         1
Notification          0         0
Updates               8         1
Keepalives            44        42
Route Refresh         0         0
Total                 53        44

Capability            Advertised   Received
-----
Route Refresh         Yes         Yes
Graceful Restart      Yes         No
Add-Path              No         No
Four Octet ASN        Yes         No
Address family IPv4 Unicast Yes         Yes
Address family IPv6 Unicast No         Yes

Address Family : IPv4 Unicast
-----

Rt. Reflect. Client  : No                Send Community      : 
Allow-AS in          : 0                 Advt. Interval      : 30
Max. Prefix           : 128000            Soft Reconfig In    : 
Nexthop-Self         : Yes               Default-Originate    : 
Cfg. Add-Path         : 
Neg. Add-Path         : Disable

Routemap In          : 
Routemap Out         : 
ORF type              : Prefix-list
ORF capability        :

```

CE2#

CE2# show bgp ipv4 unicast

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 20.8.1.2

Network	Nexthop	Metric	LocPrf	Weight	Path
*>e 0.0.0.0/0	20.1.1.2	0	100	0	6488163 102 ?
*>e 20.4.1.0/24	20.1.1.2	0	100	0	6488163 102 ?
*>e 20.5.1.0/24	20.1.1.2	0	100	0	6488163 102 ?
*>e 20.6.1.0/24	20.1.1.2	0	100	0	6488163 102 ?
*>e 101.0.0.0/24	20.1.1.2	0	100	0	6488163 102 ?
*>e 151.0.0.0/24	20.1.1.2	0	100	0	6488163 102 ?
*>i 201.0.0.0/24	20.8.1.1	0	100	0	i

Total number of entries 7

CE2#

CE2# show bgp all-vrf all summary

VRF : default

BGP Summary

Local AS	: 101	BGP Router Identifier	: 20.8.1.2
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.1.1.2	6488163	39	36	00h:29m:27s	Established	Up
20.8.1.1	101	56	67	00h:26m:28s	Established	Up

Address-family : IPv6 Unicast

CE2#

CE2# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: default

Prefix	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric
Distance/						

0.0.0.0/0		20.1.1.2	vlan2011	-	B/E	
[20/0]	00h:23m:22s					
20.1.1.0/24		-	vlan2011	-	C	

[0/0]	-				
20.1.1.1/32	-		vlan2011	-	L
[0/0]	-				
20.4.1.0/24		20.1.1.2	vlan2011	-	B/E
[20/0]	00h:29m:54s				
20.5.1.0/24		20.1.1.2	vlan2011	-	B/E
[20/0]	00h:30m:36s				
20.6.1.0/24		20.1.1.2	vlan2011	-	B/E
[20/0]	00h:24m:12s				
20.8.1.0/24	-		vlan2081	-	C
[0/0]	-				
20.8.1.2/32	-		vlan2081	-	L
[0/0]	-				
101.0.0.0/24		20.1.1.2	vlan2011	-	B/E
[20/0]	00h:28m:22s				
151.0.0.0/24		20.1.1.2	vlan2011	-	B/E
[20/0]	00h:23m:22s				
201.0.0.0/24		20.8.1.1	vlan2081	-	B/I
[200/0]	00h:28m:22s				

Total Route Count : 11

CE3 Configuration

```

CE3# show run
Current configuration:
!
!Version ArubaOS-CX TL.10.09.0001AX
!export-password: default
hostname CE3
profile l3-core
logging console severity crit
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2021,2041
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/1
    no shutdown
    description Towards PE3
    no routing
    vlan trunk native 1
    vlan trunk allowed 2021
interface 1/1/2
    no shutdown
    description Towards 151 and default subnet
    no routing
    vlan trunk native 1
    vlan trunk allowed 2041
interface vlan 2021
    description Towards PE3
    ip address 20.2.1.2/24
interface vlan 2041
    description Towards 151 and default subnet

```

```

ip address 20.4.1.1/24
ip ospf 1 area 0.0.0.0
!
!
!
!
!
router ospf 1
 redistribute bgp
 area 0.0.0.0
router bgp 102
 neighbor 20.2.1.1 remote-as 6488163
 neighbor 20.2.1.1 description Towards PE3
 address-family ipv4 unicast
   neighbor 20.2.1.1 activate
   neighbor 20.2.1.1 send-community both
   neighbor 20.2.1.1 soft-reconfiguration inbound
 redistribute ospf
 exit-address-family
!
https-server vrf mgmt
CE3#

```

```
CE3# show ip ospf neighbors
```

```
VRF : default Process : 1
```

```
=====
```

```
Total Number of Neighbors : 1
```

Neighbor ID	Priority	State	Nbr Address	Interface
20.4.1.2	1	FULL/BDR	20.4.1.2	vlan2041

CE3 Verification

```
CE3# show bgp ipv4 unicast neighbors
```

```
Codes: ^ Inherited from peer-group
```

```
VRF : default
```

```
BGP Neighbor 20.2.1.1 (External)
```

```
Description : Towards PE3
Peer-group :
```

Remote Router Id	: 20.2.1.1	Local Router Id	: 20.4.1.1
Remote AS	: 6488163	Local AS	: 102
Remote Port	: 179	Local Port	: 48554
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	:
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:23m:06s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: Cease		
Last SubErr Sent	: Administrative Shutdown		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 1	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	-----	-----
Open	1	1
Notification	0	0
Updates	8	3
Keepalives	23	27
Route Refresh	0	0
Total	32	31

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	Yes	Yes
Address family IPv6 Unicast	No	No

Address Family : IPv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 5	Advt. Interval	: 30
Max. Prefix	: 128000	Soft Reconfig In	: Yes
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	: Disable		

Routemap In :

Routemap Out :

ORF type : Prefix-list

ORF capability :

CE3#

CE3# show bgp ipv4 unicast

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths

Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

Local Router-ID 20.4.1.1

Network	Nexthop	Metric	LocPrf	Weight	Path
*> 0.0.0.0/0	20.4.1.2	0	100	0	?
*> 20.4.1.0/24	0.0.0.0	0	100	0	?
*> 20.5.1.0/24	20.4.1.2	0	100	0	?
*> 20.6.1.0/24	20.4.1.2	0	100	0	?
*>e 101.0.0.0/24	20.2.1.1	0	100	0	6488163 100 i
*> 151.0.0.0/24	20.4.1.2	0	100	0	?
*>e 201.0.0.0/24	20.2.1.1	0	100	0	6488163 101 i

Total number of entries 7

CE3#

CE3# show bgp all-vrf all summary

VRF : default

BGP Summary

Local AS	: 102	BGP Router Identifier	: 20.4.1.1
Peers	: 1	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.2.1.1	6488163	38	39	00h:29m:07s	Established	Up

Address-family : IPv6 Unicast

CE3#

CE3# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
R - RIP, B - BGP, O - OSPF
Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
IA - OSPF internal area, E1 - OSPF external type 1
E2 - OSPF external type 2

VRF: default

Prefix	Age	NextHop	Interface	VRF(egress)	Origin/ Type	Metric
0.0.0.0/0		20.4.1.2	vlan2041	-	O/IA	
[110/200]	00h:23m:22s					
20.2.1.0/24		-	vlan2021	-	C	
[0/0]	-					
20.2.1.2/32		-	vlan2021	-	L	
[0/0]	-					
20.4.1.0/24		-	vlan2041	-	C	
[0/0]	-					
20.4.1.1/32		-	vlan2041	-	L	
[0/0]	-					
20.5.1.0/24		20.4.1.2	vlan2041	-	O	
[110/200]	00h:29m:54s					
20.6.1.0/24		20.4.1.2	vlan2041	-	O	
[110/200]	00h:24m:12s					
101.0.0.0/24		20.2.1.1	vlan2021	-	B/E	
[20/0]	00h:28m:23s					
151.0.0.0/24		20.4.1.2	vlan2041	-	O/IA	
[110/200]	00h:23m:22s					
201.0.0.0/24		20.2.1.1	vlan2021	-	B/E	
[20/0]	00h:28m:22s					

Total Route Count : 10

CE4 Configuration

```

CE4# show run
Current configuration:
!
!Version ArubaOS-CX TL.10.09.0001AX
!export-password: default
hostname CE4
profile l3-core
logging console severity crit
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2031,2051
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/1
    no shutdown
    description Towards PE3
    no routing
    vlan trunk native 1
    vlan trunk allowed 2031
interface 1/1/2
    no shutdown
    description Towards 151 and default subnet
    no routing
    vlan trunk native 1
    vlan trunk allowed 2051
interface vlan 2031
    description Towards PE3
    ip address 20.3.1.2/24
interface vlan 2051
    description Towards 151 and default subnet
    ip address 20.5.1.1/24
    ip ospf 1 area 0.0.0.0
!
!
!
!
!
router ospf 1
    redistribute bgp
    area 0.0.0.0
router bgp 102
    neighbor 20.3.1.1 remote-as 6488163
    neighbor 20.3.1.1 description Towards PE3
    address-family ipv4 unicast
        neighbor 20.3.1.1 activate
        neighbor 20.3.1.1 send-community both
        neighbor 20.3.1.1 soft-reconfiguration inbound
    redistribute ospf
    exit-address-family
!
https-server vrf mgmt
CE4#

CE4# show ip ospf neighbors
VRF : default
Process : 1

```

```
=====

Total Number of Neighbors : 1

Neighbor ID      Priority  State           Nbr Address      Interface
-----
20.4.1.2         1        FULL/DR         20.5.1.2         vlan2051
```

CE4 Verification

```
CE4# show bgp ipv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 20.3.1.1 (External)
  Description      : Towards PE3
  Peer-group       :

  Remote Router Id : 20.3.1.1      Local Router Id  : 20.5.1.1
  Remote AS        : 6488163     Local AS         : 102
  Remote Port      : 52062       Local Port       : 179
  State            : Established  Admin Status     : Up
  Conn. Established : 1          Conn. Dropped    : 0
  Passive          : No          Update-Source    :
  Cfg. Hold Time   : 180         Cfg. Keep Alive  : 60
  Neg. Hold Time   : 180         Neg. Keep Alive   : 60
  Up/Down Time     : 00h:22m:47s Connect-Retry Time : 120
  Local-AS Prepend : No          Alt. Local-AS    : 0
  BFD              : Disabled
  Password         :
  Last Err Sent    : Cease
  Last SubErr Sent : Administrative Shutdown
  Last Err Rcvd    : No Error
  Last SubErr Rcvd : No Error

  Graceful-Restart : Enabled      Gr. Restart Time : 120
  Gr. Stalepath Time : 300        Remove Private-AS : No
  TTL               : 1          Local Cluster-ID  :
  Weight            : 0          Fall-over         : No
  Confederation-Peers : No

  Message statistics      Sent      Rcvd
  -----
  Open                    1          1
  Notification            0          0
  Updates                 9          1
  Keepalives             22         26
  Route Refresh           0          0
  Total                   32         28

  Capability              Advertised  Received
  -----
  Route Refresh           Yes         Yes
  Graceful Restart       Yes         Yes
  Add-Path                No         No
  Four Octet ASN         Yes         Yes
  Address family IPv4 Unicast Yes         Yes
  Address family IPv6 Unicast No          No

  Address Family : IPv4 Unicast
```

```

-----

Rt. Reflect. Client : No                Send Community      : both
Allow-AS in         : 5                  Advt. Interval       : 30
Max. Prefix          : 128000             Soft Reconfig In     : Yes
Nexthop-Self         :                   Default-Originate    :
Cfg. Add-Path        :
Neg. Add-Path        : Disable

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

CE4#

CE4# show bgp ipv4 unicast
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 20.5.1.1

   Network          Nexthop          Metric      LocPrf      Weight Path
*> 0.0.0.0/0        20.5.1.2            0           100         0         ?
*> 20.4.1.0/24      20.5.1.2            0           100         0         ?
*> 20.5.1.0/24      0.0.0.0             0           100         0         ?
*> 20.6.1.0/24      20.5.1.2            0           100         0         ?
*> 101.0.0.0/24     20.5.1.2            0           100         0         ?
*> 151.0.0.0/24     20.5.1.2            0           100         0         ?
*> 201.0.0.0/24     20.5.1.2            0           100         0         ?
Total number of entries 7

CE4#

CE4# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS           : 102                BGP Router Identifier : 20.5.1.1
Peers              : 1                  Log Neighbor Changes  : No
Cfg. Hold Time     : 180               Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor          Remote-AS   MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.3.1.1          6488163    35      39      00h:28m:48s Established Up

Address-family : IPv6 Unicast
-----

CE4#

CE4# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
              R - RIP, B - BGP, O - OSPF
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

```

IA - OSPF internal area, E1 - OSPF external type 1
 E2 - OSPF external type 2

VRF: default

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

0.0.0.0/0	20.5.1.2	vlan2051	-	O/IA	
[110/200]	00h:23m:22s				
20.3.1.0/24	-	vlan2031	-	C	
[0/0]	-				
20.3.1.2/32	-	vlan2031	-	L	
[0/0]	-				
20.4.1.0/24	20.5.1.2	vlan2051	-	O	
[110/200]	00h:29m:55s				
20.5.1.0/24	-	vlan2051	-	C	
[0/0]	-				
20.5.1.1/32	-	vlan2051	-	L	
[0/0]	-				
20.6.1.0/24	20.5.1.2	vlan2051	-	O	
[110/200]	00h:24m:12s				
101.0.0.0/24	20.5.1.2	vlan2051	-	O/E2	
[110/25]	00h:28m:22s				
151.0.0.0/24	20.5.1.2	vlan2051	-	O/IA	
[110/200]	00h:23m:22s				
201.0.0.0/24	20.5.1.2	vlan2051	-	O/E2	
[110/25]	00h:28m:22s				
Total Route Count : 10					

PE1 Configuration

```

PE1# show run
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001AX
!export-password: default
hostname PE1
profile core-spine
logging console severity crit
vrf spoke_1
  rd 1:1
  l3vpn-only
  address-family ipv4 unicast
    route-target export 1:1
    route-target import 1:0
  exit-address-family
cli-session
  timeout 0
!
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2001
interface mgmt

```

```

    no shutdown
    ip dhcp
interface 1/1/37
    no shutdown
    description Towards CE1
    no routing
    vlan trunk native 1
    vlan trunk allowed 2001
interface 1/1/38
    no shutdown
    mtu 9198
    description Towards P1
    ip address 30.0.1.1/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface loopback 0
    ip address 1.1.1.1/32
    ip ospf 1 area 0.0.0.0
interface vlan 2001
    vrf attach spoke_1
    description Towards CE1
    ip address 20.0.1.2/24
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 2.2.2.2 remote-as 6488163
    neighbor 2.2.2.2 description Towards PE2-SPOKE2
    neighbor 2.2.2.2 update-source loopback 0
    neighbor 3.3.3.3 remote-as 6488163
    neighbor 3.3.3.3 description Towards PE3-HUB
    neighbor 3.3.3.3 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 2.2.2.2 activate
        neighbor 2.2.2.2 send-community both
        neighbor 3.3.3.3 activate
        neighbor 3.3.3.3 send-community both
    exit-address-family
!
    vrf spoke_1
        neighbor 20.0.1.1 remote-as 100
        neighbor 20.0.1.1 description Towards CE1
        address-family ipv4 unicast
            neighbor 20.0.1.1 activate
            neighbor 20.0.1.1 send-community both
            neighbor 20.0.1.1 soft-reconfiguration inbound
        exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
    router-id loopback0

```

PE1 Verification

```

PE1# show ip ospf neighbors
VRF : default                                     Process : 1
=====

Total Number of Neighbors : 1

Neighbor ID      Priority   State             Nbr Address       Interface
-----
4.4.4.4          1         FULL/BDR          30.0.1.2           1/1/38

PE1#

PE1# show mpls ldp neighbor
Local LDP Identifier: 1.1.1.1:0, Peer LDP Identifier: 4.4.4.4:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:17:58
  State: operational
  LDP Discovery Sources: 1/1/38
  Addresses bound to this peer:
    30.0.1.2 30.0.2.2 30.0.3.1 4.4.4.4

PE1#

PE1# show mpls forwarding

MPLS Bindings

Entry Bindings   : 9
Exit Bindings    : 3
Transit Bindings : 3
PHP Mode         : Explicit-Null
QoS Mode         : Uniform
TTL Propagation  : Uniform

Entry Bindings:

Origin   Prefix           Ingress           Nexthop           Outgoing
Egress   Egress           Status            Address            Label
Interface VRF
-----
LDP      2.2.2.2/32             default           30.0.1.2           17
1/1/38   default               operational
LDP      3.3.3.3/32             default           30.0.1.2           18
1/1/38   default               operational
LDP      4.4.4.4/32             default           30.0.1.2           exp-null
1/1/38   default               operational
BGP      0.0.0.0/0              spoke_1           3.3.3.3            19
1/1/38   default               operational
BGP      20.4.1.0/24            spoke_1           3.3.3.3            19
1/1/38   default               operational
BGP      20.5.1.0/24            spoke_1           3.3.3.3            19
1/1/38   default               operational
BGP      20.6.1.0/24            spoke_1           3.3.3.3            19
1/1/38   default               operational
BGP      151.0.0.0/24           spoke_1           3.3.3.3            19
1/1/38   default               operational
BGP      201.0.0.0/24           spoke_1           3.3.3.3            19
1/1/38   default               operational

```

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status
static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	19	spoke_1	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix Outgoing	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
LDP	4.4.4.4/32		16	1/1/38	default	30.0.1.2
	exp-null	operational				
LDP	2.2.2.2/32		17	1/1/38	default	30.0.1.2
	17	operational				
LDP	3.3.3.3/32		18	1/1/38	default	30.0.1.2
	18	operational				

PE1#

PE1# show bgp vpnv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 2.2.2.2 (Internal)

```

Description      : Towards PE2-SPOKE2
Peer-group       :

Remote Router Id  : 2.2.2.2          Local Router Id   : 1.1.1.1
Remote AS        : 6488163          Local AS          : 6488163
Remote Port      : 179              Local Port        : 39729
State            : Established       Admin Status      : Up
Conn. Established : 1               Conn. Dropped     : 0
Passive          : No               Update-Source     : loopback0
Cfg. Hold Time   : 180              Cfg. Keep Alive   : 60
Neg. Hold Time   : 180              Neg. Keep Alive   : 60
Up/Down Time     : 00h:19m:46s      Connect-Retry Time : 120
Local-AS Prepend : No               Alt. Local-AS     : 0
BFD              : Disabled
Password         :
Last Err Sent    : No Error
Last SubErr Sent : No Error
Last Err Rcvd    : No Error
Last SubErr Rcvd : No Error

Graceful-Restart  : Enabled          Gr. Restart Time  : 120
Gr. Stalepath Time : 300            Remove Private-AS : No
TTL               : 255            Local Cluster-ID  :
Weight            : 0              Fall-over         : No
Confederation-Peers : No

```

```

Message statistics      Sent      Rcvd
-----
Open                   1          1

```

Notification	0	0
Updates	2	2
Keepalives	22	22
Route Refresh	0	0
Total	25	25

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 3.3.3.3 (Internal)

Description	: Towards PE3-HUB
Peer-group	:

Remote Router Id	: 3.3.3.3	Local Router Id	: 1.1.1.1
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 43547	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:19m:18s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1

Notification	0	0
Updates	2	9
Keepalives	22	18
Route Refresh	0	0
Total	25	28

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

PE1#

PE1# show bgp vrf spoke_1 ipv4 unicast neighbors

Codes: ^ Inherited from peer-group

VRF : spoke_1

BGP Neighbor 20.0.1.1 (External)

Description	: Towards CE1
Peer-group	:

Remote Router Id	: 20.7.1.2	Local Router Id	: 20.0.1.2
Remote AS	: 100	Local AS	: 6488163
Remote Port	: 179	Local Port	: 57770
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	:
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:21m:38s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: Cease		
Last SubErr Sent	: Administrative Shutdown		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 1	Local Cluster-ID	:


```

VRF : default
BGP Summary
-----
Local AS           : 6488163      BGP Router Identifier : 1.1.1.1
Peers              : 2            Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----

Address-family : IPv6 Unicast
-----

Address-family : VPNv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
2.2.2.2       6488163    37      36      00h:29m:42s Established Up
3.3.3.3       6488163    40      36      00h:29m:14s Established Up

Address-family : L2VPN EVPN
-----

VRF : spoke_1
BGP Summary
-----
Local AS           : 6488163      BGP Router Identifier : 20.0.1.2
Peers              : 1            Log Neighbor Changes  : No
Cfg. Hold Time     : 180          Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.0.1.1      100       37      40      00h:29m:45s Established Up

Address-family : IPv6 Unicast
-----

PE1#

PE1# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
               R - RIP, B - BGP, O - OSPF
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
               IA - OSPF internal area, E1 - OSPF external type 1
               E2 - OSPF external type 2

VRF: default

Prefix          Nexthop          Interface      VRF(egress)  Origin/
Distance/      Age                                     Type          Metric
-----
1.1.1.1/32      -              loopback0      -              L
[0/0]           -

```

```

2.2.2.2/32          30.0.1.2          1/1/38          -          O
[110/200]          00h:31m:42s
3.3.3.3/32          30.0.1.2          1/1/38          -          O
[110/150]          00h:31m:21s
4.4.4.4/32          30.0.1.2          1/1/38          -          O
[110/100]          00h:32m:18s
30.0.1.0/24         -          1/1/38          -          C
[0/0]              -
30.0.1.1/32         -          1/1/38          -          L
[0/0]              -
30.0.2.0/24         30.0.1.2          1/1/38          -          O
[110/200]          00h:32m:18s
30.0.3.0/24         30.0.1.2          1/1/38          -          O
[110/150]          00h:32m:06s

VRF: spoke_1

Prefix            Nexthop            Interface        VRF(egress)      Origin/
Distance/         Age
-----
Type            Metric
-----
0.0.0.0/0          3.3.3.3           1/1/38           default           B/V
[200/0]            00h:23m:22s
20.0.1.0/24        -                 vlan2001         -                 C
[0/0]              -
20.0.1.2/32        -                 vlan2001         -                 L
[0/0]              -
20.4.1.0/24        3.3.3.3           1/1/38           default           B/V
[200/0]            00h:29m:55s
20.5.1.0/24        3.3.3.3           1/1/38           default           B/V
[200/0]            00h:30m:37s
20.6.1.0/24        3.3.3.3           1/1/38           default           B/V
[200/0]            00h:24m:12s
101.0.0.0/24       20.0.1.1          vlan2001         -                 B/E
[20/0]             00h:28m:23s
151.0.0.0/24       3.3.3.3           1/1/38           default           B/V
[200/0]            00h:23m:22s
201.0.0.0/24       3.3.3.3           1/1/38           default           B/V
[200/0]            00h:28m:22s

Total Route Count : 17

```

PE2 Configuration

```

PE2# show run
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001AX
!export-password: default
hostname PE2
profile core-spine
logging console severity crit
vrf spoke_2
  rd 1:1
  l3vpn-only
  address-family ipv4 unicast
    route-target export 1:1
    route-target import 1:0
  exit-address-family
cli-session

```

```

    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2011
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/43
    no shutdown
    description Towards CE1
    no routing
    vlan trunk native 1
    vlan trunk allowed 2011
interface 1/1/44
    no shutdown
    mtu 9198
    description Towards P1
    ip address 30.0.2.1/24
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface loopback 0
    ip address 2.2.2.2/32
    ip ospf 1 area 0.0.0.0
interface vlan 2011
    vrf attach spoke_2
    description Towards CE1
    ip address 20.1.1.2/24
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 1.1.1.1 remote-as 6488163
    neighbor 1.1.1.1 description Towards PE1-SPOKE1
    neighbor 1.1.1.1 update-source loopback 0
    neighbor 3.3.3.3 remote-as 6488163
    neighbor 3.3.3.3 description Towards PE3-HUB
    neighbor 3.3.3.3 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 1.1.1.1 activate
        neighbor 1.1.1.1 send-community both
        neighbor 3.3.3.3 activate
        neighbor 3.3.3.3 send-community both
    exit-address-family
!
vrf spoke_2
    neighbor 20.1.1.1 remote-as 101
    neighbor 20.1.1.1 description Towards CE2
    address-family ipv4 unicast
        neighbor 20.1.1.1 activate
        neighbor 20.1.1.1 send-community both
        neighbor 20.1.1.1 soft-reconfiguration inbound
    exit-address-family

```

```

!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
        router-id loopback0
PE2#

PE2# show ip ospf neighbors
VRF : default                                Process : 1
=====

Total Number of Neighbors : 1

Neighbor ID      Priority   State             Nbr Address       Interface
-----
4.4.4.4          1         FULL/DR           30.0.2.2          1/1/44

```

PE2 Verification

```

PE2# show mpls ldp neighbor
Local LDP Identifier: 2.2.2.2:0, Peer LDP Identifier: 4.4.4.4:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:17:57
  State: operational
  LDP Discovery Sources: 1/1/44
  Addresses bound to this peer:
    30.0.1.2 30.0.2.2 30.0.3.1 4.4.4.4

PE2#
PE2# show mpls forwarding

MPLS Bindings

Entry Bindings   : 9
Exit Bindings    : 3
Transit Bindings : 3
PHP Mode         : Explicit-Null
QoS Mode         : Uniform
TTL Propagation  : Uniform

Entry Bindings:

Origin   Prefix           Ingress           Nexthop           Outgoing
Egress   Egress           Status            Address            Label
Interface VRF
-----
LDP      1.1.1.1/32             default           30.0.2.2           16
1/1/44   default               operational
LDP      3.3.3.3/32             default           30.0.2.2           18
1/1/44   default               operational
LDP      4.4.4.4/32             default           30.0.2.2           exp-null
1/1/44   default               operational
BGP      0.0.0.0/0              spoke_2           3.3.3.3            19
1/1/44   default               operational
BGP      20.4.1.0/24            spoke_2           3.3.3.3            19
1/1/44   default               operational

```

BGP	20.5.1.0/24	spoke_2	3.3.3.3	19
1/1/44	default	operational		
BGP	20.6.1.0/24	spoke_2	3.3.3.3	19
1/1/44	default	operational		
BGP	101.0.0.0/24	spoke_2	3.3.3.3	19
1/1/44	default	operational		
BGP	151.0.0.0/24	spoke_2	3.3.3.3	19
1/1/44	default	operational		

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status
static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	19	spoke_2	operational
static	n/a	7	-	default	operational

Transit Bindings:

Origin	Prefix	Status	Incoming Label	Egress Interface	Egress VRF	Nexthop Address
LDP	1.1.1.1/32	operational	16	1/1/44	default	30.0.2.2
LDP	4.4.4.4/32	operational	17	1/1/44	default	30.0.2.2
LDP	3.3.3.3/32	operational	18	1/1/44	default	30.0.2.2

PE2#

PE2# show bgp vpnv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 1.1.1.1 (Internal)

Description	: Towards PE1-SPOKE1		
Peer-group	:		
Remote Router Id	: 1.1.1.1	Local Router Id	: 2.2.2.2
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 39729	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:19m:46s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		
Graceful-Restart	: Enabled	Gr. Restart Time	: 120

Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	2	2
Keepalives	22	22
Route Refresh	0	0
Total	25	25

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

BGP Neighbor 3.3.3.3 (Internal)

Description	: Towards PE3-HUB
Peer-group	:

Remote Router Id	: 3.3.3.3	Local Router Id	: 2.2.2.2
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 38293
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:19m:28s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
------------------	-----------	------------------	-------

Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	2	9
Keepalives	22	17
Route Refresh	0	0
Total	25	27

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

PE2#

PE2# show bgp vrf spoke_2 ipv4 unicast neighbors

Codes: ^ Inherited from peer-group

VRF : spoke_2

BGP Neighbor 20.1.1.1 (External)

Description	: Towards CE2
Peer-group	:

Remote Router Id	: 20.8.1.2	Local Router Id	: 20.1.1.2
Remote AS	: 101	Local AS	: 6488163
Remote Port	: 179	Local Port	: 60400
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	:
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:21m:33s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		

```

Last Err Sent      : Cease
Last SubErr Sent   : Administrative Shutdown
Last Err Rcvd     : No Error
Last SubErr Rcvd   : No Error

Graceful-Restart    : Enabled                Gr. Restart Time   : 120
Gr. Stalepath Time  : 300                    Remove Private-AS  : No
TTL                : 1                      Local Cluster-ID   :
Weight             : 0                      Fall-over          : No
Confederation-Peers : No

```

Message statistics	Sent	Rcvd
Open	1	1
Notification	0	0
Updates	9	2
Keepalives	20	24
Route Refresh	0	0
Total	30	27

Capability	Advertised	Received
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	Yes	Yes
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	No	No
Address family L2VPN EVPN	No	No

Address Family : IPv4 Unicast

```

Rt. Reflect. Client : No                Send Community    : both
Allow-AS in         : 0                 Advt. Interval    : 30
Max. Prefix          : 300000           Soft Reconfig In   : Yes
Nexthop-Self         :                 Default-Originate  :
Cfg. Add-Path        :
Neg. Add-Path        : Disable

```

```

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

```

PE2#

PE2# show bgp vrf spoke_2 ipv4 unicast

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : spoke_2

Local Router-ID 20.1.1.2

	Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1						
*>	0.0.0.0/0	3.3.3.3	0	100	0	102 ?
*>	20.4.1.0/24	3.3.3.3	0	100	0	102 ?
*>	20.5.1.0/24	3.3.3.3	0	100	0	102 ?
*>	20.6.1.0/24	3.3.3.3	0	100	0	102 ?
*>	101.0.0.0/24	3.3.3.3	0	100	0	102 ?

```

*> 151.0.0.0/24      3.3.3.3      0      100      0      102 ?
*>e 201.0.0.0/24     20.1.1.1     0      100      0      101 i
Total number of entries 7

PE2#

PE2# show bgp all-vrf all summary
VRF : default
BGP Summary
-----
Local AS           : 6488163      BGP Router Identifier : 2.2.2.2
Peers              : 2            Log Neighbor Changes  : No
Cfg. Hold Time     : 180         Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----

Address-family : IPv6 Unicast
-----

Address-family : VPNv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
1.1.1.1       6488163   36      37      00h:29m:42s Established Up
3.3.3.3       6488163   39      37      00h:29m:24s Established Up

Address-family : L2VPN EVPN
-----

VRF : spoke_2
BGP Summary
-----
Local AS           : 6488163      BGP Router Identifier : 20.1.1.2
Peers              : 1            Log Neighbor Changes  : No
Cfg. Hold Time     : 180         Cfg. Keep Alive       : 60
Confederation Id   : 0

Address-family : IPv4 Unicast
-----
Neighbor      Remote-AS  MsgRcvd MsgSent Up/Down Time State
AdminStatus
20.1.1.1      101       36      39      00h:29m:27s Established Up

Address-family : IPv6 Unicast
-----

PE2#

PE2# show ip route all-vrfs

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
              R - RIP, B - BGP, O - OSPF
Type Codes:  E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
              IA - OSPF internal area, E1 - OSPF external type 1
              E2 - OSPF external type 2

VRF: default

```

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

1.1.1.1/32 [110/200]	00h:31m:42s	30.0.2.2	1/1/44	-	O	
2.2.2.2/32 [0/0]	-	-	loopback0	-	L	
3.3.3.3/32 [110/150]	00h:31m:21s	30.0.2.2	1/1/44	-	O	
4.4.4.4/32 [110/100]	00h:31m:42s	30.0.2.2	1/1/44	-	O	
30.0.1.0/24 [110/200]	00h:31m:42s	30.0.2.2	1/1/44	-	O	
30.0.2.0/24 [0/0]	-	-	1/1/44	-	C	
30.0.2.1/32 [0/0]	-	-	1/1/44	-	L	
30.0.3.0/24 [110/150]	00h:31m:42s	30.0.2.2	1/1/44	-	O	

VRF: spoke_2

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

0.0.0.0/0 [200/0]	00h:23m:22s	3.3.3.3	1/1/44	default	B/V	
20.1.1.0/24 [0/0]	-	-	vlan2011	-	C	
20.1.1.2/32 [0/0]	-	-	vlan2011	-	L	
20.4.1.0/24 [200/0]	00h:29m:55s	3.3.3.3	1/1/44	default	B/V	
20.5.1.0/24 [200/0]	00h:30m:37s	3.3.3.3	1/1/44	default	B/V	
20.6.1.0/24 [200/0]	00h:24m:12s	3.3.3.3	1/1/44	default	B/V	
101.0.0.0/24 [200/0]	00h:28m:22s	3.3.3.3	1/1/44	default	B/V	
151.0.0.0/24 [200/0]	00h:23m:22s	3.3.3.3	1/1/44	default	B/V	
201.0.0.0/24 [20/0]	00h:28m:22s	20.1.1.1	vlan2011	-	B/E	

Total Route Count : 17

PE3 Configuration

```

PE3# show run
Current configuration:
!
!Version ArubaOS-CX LL.10.09.0001AX
!export-password: default
hostname PE3
profile core-spine
logging console severity crit
vrf hub_export

```

```

    rd 1:0
    l3vpn-only
    address-family ipv4 unicast
        route-target export 1:0
    exit-address-family
vrf hub_import
    rd 0:1
    l3vpn-only
    address-family ipv4 unicast
        route-target import 1:1
    exit-address-family
cli-session
    timeout 0
!
!
!
!
!
ssh server vrf mgmt
vlan 1,2021,2031
interface mgmt
    no shutdown
    ip dhcp
system interface-group 1 speed 10g
    !interface group 1 contains ports 1/1/1-1/1/4
interface lag 99
    no shutdown
    description Towards P1
    ip address 30.0.3.2/24
    lacp mode active
    ip ospf 1 area 0.0.0.0
    mpls enable
    mpls ldp enable
interface 1/1/31
    no shutdown
    mtu 9198
    description Towards P1 LAG 99
    lag 99
interface 1/1/32
    no shutdown
    mtu 9198
    description Towards P1 LAG 99
    lag 99
interface 1/1/33
    no shutdown
    description Towards CE3
    no routing
    vlan trunk native 1
    vlan trunk allowed 2021
interface 1/1/34
    no shutdown
    description Towards CE4
    no routing
    vlan trunk native 1
    vlan trunk allowed 2031
interface loopback 0
    ip address 3.3.3.3/32
    ip ospf 1 area 0.0.0.0
interface vlan 2021
    vrf attach hub_import
    description Towards CE3

```

```

    ip address 20.2.1.1/24
interface vlan 2031
    vrf attach hub_export
    description Towards CE4
    ip address 20.3.1.1/24
!
!
!
!
!
router ospf 1
    area 0.0.0.0
router bgp 6488163
    neighbor 1.1.1.1 remote-as 6488163
    neighbor 1.1.1.1 description Towards PE1-SPOKE1
    neighbor 1.1.1.1 update-source loopback 0
    neighbor 2.2.2.2 remote-as 6488163
    neighbor 2.2.2.2 description Towards PE2-SPOKE2
    neighbor 2.2.2.2 update-source loopback 0
    address-family vpnv4 unicast
        neighbor 1.1.1.1 activate
        neighbor 1.1.1.1 send-community both
        neighbor 2.2.2.2 activate
        neighbor 2.2.2.2 send-community both
    exit-address-family
!
    vrf hub_export
        neighbor 20.3.1.2 remote-as 102
        neighbor 20.3.1.2 description Towards CE3
        address-family ipv4 unicast
            neighbor 20.3.1.2 activate
            neighbor 20.3.1.2 send-community both
            neighbor 20.3.1.2 soft-reconfiguration inbound
        exit-address-family
!
    vrf hub_import
        neighbor 20.2.1.2 remote-as 102
        neighbor 20.2.1.2 description Towards CE4
        address-family ipv4 unicast
            neighbor 20.2.1.2 activate
            neighbor 20.2.1.2 send-community both
            neighbor 20.2.1.2 soft-reconfiguration inbound
        exit-address-family
!
https-server vrf mgmt
mpls
    enable
    label-protocol ldp
        enable
    router-id loopback0
PE3#

PE3# show ip ospf neighbors
VRF : default                                     Process : 1
=====

Total Number of Neighbors : 1

Neighbor ID      Priority   State              Nbr Address      Interface
-----
4.4.4.4          1         FULL/DR            30.0.3.1         lag99

```

PE3 Verification

```

PE3# show mpls ldp neighbor
Local LDP Identifier: 3.3.3.3:0, Peer LDP Identifier: 4.4.4.4:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:17:21
  State: operational
  LDP Discovery Sources: lag99
  Addresses bound to this peer:
    30.0.1.2 30.0.2.2 30.0.3.1 4.4.4.4

```

```
PE3#
```

```
PE3# show mpls forwarding
```

```
MPLS Bindings
```

```

Entry Bindings   : 5
Exit Bindings    : 3
Transit Bindings : 3
PHP Mode         : Explicit-Null
QoS Mode         : Uniform
TTL Propagation  : Uniform

```

```
Entry Bindings:
```

Origin	Prefix	Ingress	Nexthop	Outgoing
Egress	Egress	Status	Address	Label
Interface	VRF			

LDP	1.1.1.1/32	default	30.0.3.1	16
	default	operational		
LDP	2.2.2.2/32	default	30.0.3.1	17
	default	operational		
LDP	4.4.4.4/32	default	30.0.3.1	exp-null
	default	operational		lag99
BGP	101.0.0.0/24	hub_import	1.1.1.1	19
	default	operational		
BGP	201.0.0.0/24	hub_import	2.2.2.2	19
	default	operational		lag99

```
Exit Bindings:
```

Origin	Prefix	Incoming	Service	Egress	Status
		Label	Label	VRF	

static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	19	hub_export	operational
static	n/a	7	-	default	operational

```
Transit Bindings:
```

Origin	Prefix	Incoming	Egress	Egress	Nexthop
	Outgoing	Status	Label	Interface	Address
	Label			VRF	

LDP	1.1.1.1/32	16	lag99	default	30.0.3.1
	16	operational			
LDP	2.2.2.2/32	17	lag99	default	30.0.3.1

```

17          operational
LDP 4.4.4.4/32      18          lag99          default      30.0.3.1
exp-null operational

```

PE3#

```

PE3# show bgp vpnv4 unicast neighbors
Codes: ^ Inherited from peer-group

```

VRF : default

BGP Neighbor 1.1.1.1 (Internal)

```

Description      : Towards PE1-SPOKE1
Peer-group       :

```

Remote Router Id	: 1.1.1.1	Local Router Id	: 3.3.3.3
Remote AS	: 6488163	Local AS	: 6488163
Remote Port	: 179	Local Port	: 43547
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:19m:18s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		

Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	----	----
Open	1	1
Notification	0	0
Updates	9	2
Keepalives	18	22
Route Refresh	0	0
Total	28	25

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No
Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client : No Send Community : both

```

Allow-AS in           : 0
Max. Prefix           : 300000
Nexthop-Self          :
Cfg. Add-Path          :
Neg. Add-Path          :

Routemap In           :
Routemap Out          :
ORF type               : Prefix-list
ORF capability         :

BGP Neighbor 2.2.2.2 (Internal)
Description            : Towards PE2-SPOKE2
Peer-group             :

Remote Router Id       : 2.2.2.2
Remote AS              : 6488163
Remote Port            : 38293
State                  : Established
Conn. Established      : 1
Passive                : No
Cfg. Hold Time         : 180
Neg. Hold Time         : 180
Up/Down Time           : 00h:19m:28s
Local-AS Prepend       : No
BFD                    : Disabled
Password               :
Last Err Sent          : No Error
Last SubErr Sent       : No Error
Last Err Rcvd          : No Error
Last SubErr Rcvd       : No Error

Local Router Id        : 3.3.3.3
Local AS               : 6488163
Local Port             : 179
Admin Status           : Up
Conn. Dropped          : 0
Update-Source          : loopback0
Cfg. Keep Alive        : 60
Neg. Keep Alive        : 60
Connect-Retry Time     : 120
Alt. Local-AS          : 0

Graceful-Restart       : Enabled
Gr. Stalepath Time     : 300
TTL                    : 255
Weight                 : 0
Confederation-Peers    : No

Gr. Restart Time       : 120
Remove Private-AS      : No
Local Cluster-ID       :
Fall-over              : No

Message statistics      Sent      Rcvd
-----
Open                   1         1
Notification           0         0
Updates                 9         2
Keepalives             17        22
Route Refresh           0         0
Total                  27        25

Capability              Advertised  Received
-----
Route Refresh           Yes        Yes
Graceful Restart        Yes        Yes
Add-Path                No         No
Four Octet ASN          Yes        Yes
Address family IPv4 Unicast No         No
Address family IPv6 Unicast No         No
Address family VPNv4 Unicast Yes        Yes
Address family L2VPN EVPN No         No

Address Family : VPNv4 Unicast
-----

Rt. Reflect. Client : No
Send Community       : both

```

```

Allow-AS in           : 0                      Advt. Interval       : 30
Max. Prefix           : 300000                 Soft Reconfig In     :
Nexthop-Self          :                      Default-Originate    :
Cfg. Add-Path          :
Neg. Add-Path          :

Routemap In           :
Routemap Out          :
ORF type               : Prefix-list
ORF capability         :

PE3#

PE3# show bgp vrf hub_import ipv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : hub_import

BGP Neighbor 20.2.1.2 (External)
Description           : Towards CE4
Peer-group            :

Remote Router Id      : 20.4.1.1              Local Router Id      : 20.2.1.1
Remote AS             : 102                   Local AS             : 6488163
Remote Port           : 48554                 Local Port           : 179
State                 : Established            Admin Status         : Up
Conn. Established     : 1                    Conn. Dropped        : 0
Passive               : No                   Update-Source        :
Cfg. Hold Time        : 180                  Cfg. Keep Alive      : 60
Neg. Hold Time        : 180                  Neg. Keep Alive       : 60
Up/Down Time          : 00h:22m:06s          Connect-Retry Time   : 120
Local-AS Prepend      : No                   Alt. Local-AS        : 0
BFD                   : Disabled
Password              :
Last Err Sent         : Cease
Last SubErr Sent      : Administrative Shutdown
Last Err Rcvd         : No Error
Last SubErr Rcvd      : No Error

Graceful-Restart      : Enabled                Gr. Restart Time     : 120
Gr. Stalepath Time    : 300                   Remove Private-AS    : No
TTL                   : 1                     Local Cluster-ID     :
Weight                : 0                     Fall-over             : No
Confederation-Peers   : No

Message statistics      Sent      Rcvd
-----
Open                   1         1
Notification           0         0
Updates                 3         8
Keepalives             26        22
Route Refresh           0         0
Total                  30        31

Capability              Advertised  Received
-----
Route Refresh           Yes        Yes
Graceful Restart        Yes        Yes
Add-Path                No         No
Four Octet ASN          Yes        Yes
Address family IPv4 Unicast Yes        Yes
Address family IPv6 Unicast No         No
Address family VPNv4 Unicast No         No

```

```

Address family L2VPN EVPN          No          No

Address Family : IPv4 Unicast
-----

Rt. Reflect. Client : No          Send Community      : both
Allow-AS in         : 0          Advt. Interval      : 30
Max. Prefix         : 300000     Soft Reconfig In    : Yes
Nexthop-Self        :           Default-Originate       :
Cfg. Add-Path        :
Neg. Add-Path        : Disable

Routemap In         :
Routemap Out        :
ORF type             : Prefix-list
ORF capability       :

PE3# show bgp vrf hub_export ipv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : hub_export

BGP Neighbor 20.3.1.2 (External)
Description          : Towards CE3
Peer-group           :

Remote Router Id     : 20.5.1.1   Local Router Id      : 20.3.1.1
Remote AS            : 102        Local AS              : 6488163
Remote Port          : 179        Local Port            : 52062
State                : Established Admin Status         : Up
Conn. Established    : 1          Conn. Dropped        : 0
Passive              : No         Update-Source         :
Cfg. Hold Time       : 180        Cfg. Keep Alive      : 60
Neg. Hold Time       : 180        Neg. Keep Alive      : 60
Up/Down Time         : 00h:21m:56s Connect-Retry Time   : 120
Local-AS Prepend     : No         Alt. Local-AS        : 0
BFD                  : Disabled
Password             :
Last Err Sent        : Cease
Last SubErr Sent     : Administrative Shutdown
Last Err Rcvd        : No Error
Last SubErr Rcvd     : No Error

Graceful-Restart     : Enabled     Gr. Restart Time     : 120
Gr. Stalepath Time   : 300         Remove Private-AS    : No
TTL                  : 1           Local Cluster-ID     :
Weight               : 0           Fall-over            : No
Confederation-Peers : No

Message statistics    Sent      Rcvd
-----
Open                 1         1
Notification         0         0
Updates              1         9
Keepalives           25        21
Route Refresh        0         0
Total                27        31

Capability            Advertised  Received
-----
Route Refresh         Yes        Yes
Graceful Restart      Yes        Yes
Add-Path              No         No

```

Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	Yes	Yes
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	No	No
Address family L2VPN EVPN	No	No

Address Family : IPv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 300000	Soft Reconfig In	: Yes
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	: Disable		

Routemap In	:
Routemap Out	:
ORF type	: Prefix-list
ORF capability	:

PE3#

PE3# show bgp vrf hub_import ipv4 unicast
 Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
 i internal, e external S Stale, R Removed, a additional-paths
 Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : hub_import
 Local Router-ID 20.2.1.1

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 0:1					
*>e 0.0.0.0/0	20.2.1.2	0	100	0	102 ?
*>e 20.4.1.0/24	20.2.1.2	0	100	0	102 ?
*>e 20.5.1.0/24	20.2.1.2	0	100	0	102 ?
*>e 20.6.1.0/24	20.2.1.2	0	100	0	102 ?
*> 101.0.0.0/24	1.1.1.1	0	100	0	100 i
*>e 151.0.0.0/24	20.2.1.2	0	100	0	102 ?
*> 201.0.0.0/24	2.2.2.2	0	100	0	101 i

Total number of entries 7

PE3# show bgp vrf hub_export ipv4 unicast
 Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
 i internal, e external S Stale, R Removed, a additional-paths
 Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : hub_export
 Local Router-ID 20.3.1.1

Network	Nexthop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:0					
*>e 0.0.0.0/0	20.3.1.2	0	100	0	102 ?
*>e 20.4.1.0/24	20.3.1.2	0	100	0	102 ?
*>e 20.5.1.0/24	20.3.1.2	0	100	0	102 ?
*>e 20.6.1.0/24	20.3.1.2	0	100	0	102 ?
*>e 101.0.0.0/24	20.3.1.2	0	100	0	102 ?
*>e 151.0.0.0/24	20.3.1.2	0	100	0	102 ?
*>e 201.0.0.0/24	20.3.1.2	0	100	0	102 ?

Total number of entries 7

PE3#

PE3# show bgp all-vrf all summary

VRF : default

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 3.3.3.3
Peers	: 2	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Address-family : IPv6 Unicast

Address-family : VPNv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
1.1.1.1	6488163	36	40	00h:29m:14s	Established	Up
2.2.2.2	6488163	37	39	00h:29m:24s	Established	Up

Address-family : L2VPN EVPN

VRF : hub_export

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.3.1.1
Peers	: 1	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.3.1.2	102	39	35	00h:28m:48s	Established	Up

Address-family : IPv6 Unicast

VRF : hub_import

BGP Summary

Local AS	: 6488163	BGP Router Identifier	: 20.2.1.1
Peers	: 1	Log Neighbor Changes	: No
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Address-family : IPv4 Unicast

Neighbor	Remote-AS	MsgRcvd	MsgSent	Up/Down	Time	State
AdminStatus						
20.2.1.2	102	39	38	00h:29m:07s	Established	Up

Address-family : IPv6 Unicast

PE3#

```
PE3# show ip route all-vrfs
```

```
Displaying ipv4 routes selected for forwarding
```

```
Origin Codes: C - connected, S - static, L - local
```

```
R - RIP, B - BGP, O - OSPF
```

```
Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
```

```
IA - OSPF internal area, E1 - OSPF external type 1
```

```
E2 - OSPF external type 2
```

```
VRF: default
```

Prefix Distance/	Age	Nextthop	Interface	VRF(egress)	Origin/ Type	Metric

1.1.1.1/32		30.0.3.1	lag99	-	O	
[110/150]	00h:31m:22s					
2.2.2.2/32		30.0.3.1	lag99	-	O	
[110/150]	00h:31m:22s					
3.3.3.3/32		-	loopback0	-	L	
[0/0]	-					
4.4.4.4/32		30.0.3.1	lag99	-	O	
[110/50]	00h:31m:22s					
30.0.1.0/24		30.0.3.1	lag99	-	O	
[110/150]	00h:31m:22s					
30.0.2.0/24		30.0.3.1	lag99	-	O	
[110/150]	00h:31m:22s					
30.0.3.0/24		-	lag99	-	C	
[0/0]	-					
30.0.3.2/32		-	lag99	-	L	
[0/0]	-					

```
VRF: hub_export
```

Prefix Distance/	Age	Nextthop	Interface	VRF(egress)	Origin/ Type	Metric

0.0.0.0/0		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:23m:22s					
20.3.1.0/24		-	vlan2031	-	C	
[0/0]	-					
20.3.1.1/32		-	vlan2031	-	L	
[0/0]	-					
20.4.1.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:29m:55s					
20.5.1.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:30m:37s					
20.6.1.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:24m:12s					
101.0.0.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:28m:22s					
151.0.0.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:23m:22s					
201.0.0.0/24		20.3.1.2	vlan2031	-	B/E	
[20/0]	00h:28m:22s					

```
VRF: hub_import
```

Prefix Distance/	Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

0.0.0.0/0		20.2.1.2	vlan2021	-	B/E	
[20/0]	00h:23m:22s					
20.2.1.0/24		-	vlan2021	-	C	
[0/0]	-					
20.2.1.1/32		-	vlan2021	-	L	
[0/0]	-					
20.4.1.0/24		20.2.1.2	vlan2021	-	B/E	
[20/0]	00h:30m:57s					
20.5.1.0/24		20.2.1.2	vlan2021	-	B/E	
[20/0]	00h:29m:55s					
20.6.1.0/24		20.2.1.2	vlan2021	-	B/E	
[20/0]	00h:24m:12s					
101.0.0.0/24		1.1.1.1	lag99	default	B/V	
[200/0]	00h:28m:23s					
151.0.0.0/24		20.2.1.2	vlan2021	-	B/E	
[20/0]	00h:23m:22s					
201.0.0.0/24		2.2.2.2	lag99	default	B/V	
[200/0]	00h:28m:23s					
Total Route Count : 26						

MPLS commands

bind ipv4 (lsp label imposition)

```
bind ipv4 {<IP-ADDR>/<MASK> | <IP-ADDR> <MASK>} output <IFNAME> <IP-ADDR> <OUT-LABEL>
no bind ipv4 {<IP-ADDR>/<MASK> | <IP-ADDR> <MASK>} output <IFNAME> <IP-ADDR> <OUT-LABEL>
```

Description

Performs LSP label imposition by adding label to an ingress packet (push operation).
The `no` form of this command removes the ingress packet label.

Parameter	Description
<code>ipv4 <IP-ADDR>/<MASK></code>	Specifies the IPv4 destination in x.x.x.x format, where x is a decimal value from 0 to 255 and the number of bits in an IPv4 address mask in CIDR format (x), where x is a decimal number from 0 to 32.
<code>ipv4 <IP-ADDR> <MASK></code>	Specifies the IPv4 destination in x.x.x.x format, where x is a decimal value from 0 to 255 and the destination IP subnet mask in x.x.x.x format, where x is a decimal value from 0 to 255.
<code><IFNAME></code>	Specifies the egress interface of the binding.
<code><IP-ADDR></code>	Specifies the next hop IP address of the binding.
<code><OUT-LABEL></code>	Specifies the MPLS label to apply. Range: 16-1048575.

Usage

- The `no` form of both the `mpls` and `static-lsp` commands deletes all static LSP bindings.
- The static LSP label range must be allocated before configuring static LSP bindings.
- Specifying an outgoing label outside the range of 16-1048575 is not allowed. An outgoing label is not bound by allocated static LSP label range.
- Types of valid egress interfaces are: System, LAG, VLAN, and Tunnel.
 - Routing must be enabled for egress interfaces.
 - Interfaces must be configured before performing the `bind` command.
 - LAG member interfaces are not allowed as egress interfaces.

Examples

Configuring binding:

```
switch(config-mpls-static-lsp)# bind ipv4 2.2.2.0/24 output 1/1/1 20.0.0.2 20
```

Unconfiguring binding:

```
switch(config-mpls-static-lsp)# no bind ipv4 2.2.2.0/24 output 1/1/1 20.0.0.2 20
```

Configuring binding with an invalid egress interface:

```
switch(config-mpls-static-lsp)# bind ipv4 2.2.2.0/24 output 1/1/1 20.0.0.2 20  
The output must be a layer 3 interface with routing enabled.
```

Configuring binding with an interface that does not have an IP address assigned:

```
switch(config-mpls-static-lsp)# bind ipv4 2.2.2.0/24 output 1/1/1 20.0.0.2 20  
The egress interface must have an IP address assigned.
```

Configuring binding with a next hop IP that is not in the same subnet as egress interface:

```
switch(config-if)# interface 1/1/1  
switch(config-if)# no shutdown  
switch(config-if)# ip address 10.0.0.1/24  
switch(config-if)# mpls enable  
switch(config-if)# mpls  
switch(config-mpls)# static-lsp  
switch(config-mpls-static-lsp)# bind ipv4 2.2.2.0/24 output 1/1/1 60.0.0.20 40  
The next hop IP address must be in the same subnet as interface 1/1/1.
```

Configuring binding with a next hop IP that is the same as the egress interface IP:

```
switch(config-if)# int 1/1/1  
switch(config-if)# no shutdown  
switch(config-if)# ip address 10.0.0.1/24  
switch(config-if)# mpls enable  
switch(config)# mpls  
switch(config-mpls)# static-lsp  
switch(config-mpls-static-lsp)# bind ipv4 2.2.2.0/24 output 1/1/1 10.0.0.1 40  
The next hop IP address cannot be the same as any interface 1/1/1 primary or  
secondary addresses.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-static-lsp	Administrators or local user group members with execution rights for this command.

bind ipv4 input (static lsp binding)

```
bind ipv4 input <in-label>
no bind ipv4 input <in-label>
```

Description

Performs label disposition by removing label from an egress packet (pop operation).

The `no` form of this command removes the static LSP binding configuration.

Parameter	Description
<code><in-label></code>	Specifies the MPLS label to bind. Range: 16-1048575.

Usage

- The `no` form of both the `mpls` and `static-lsp` commands deletes all MPLS binding configurations.
- The static LSP label range must be allocated before configuring static LSP bindings.
- Specifying an incoming label outside the range of 16-1048575 is not allowed. An incoming label is bound by the allocated static LSP label range.

Examples

Configuring static LSP binding for label disposition:

```
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# bind ipv4 input 20
```

Removing the configuration for static LSP binding:

```
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# no bind ipv4 input 20
```

Configuring static LSP binding outside the label range:

```
switch(config-mpls-static-lsp)# bind ipv4 input 200
The input label must be within the range specified by label-range.
```

Configuring static LSP binding without first allocating a label range:

```
switch(config-mpls-static-lsp)# bind ipv4 input 20
A label range must be allocated before configuring bindings.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-aruba-central	Administrators or local user group members with execution rights for this command.

clear mpls statistics

```
clear mpls statistics {ingress | egress} <LABEL>
no syntax
```

Description

Clears MPLS statistics per label for all sessions.

Parameter	Description
ingress	Selects ingress statistics.
egress	Selects egress statistics.
<LABEL>	Specifies the label for which statistics will be cleared.

Examples

Clearing ingress MPLS statistics for a specific label:

```
switch# clear mpls statistics ingress 20
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

crossconnect input (static lsp binding label swap)

```
crossconnect input <in-label> output <IFNAME> <ID-ADDR> {<out-label> | explicit-null}
no crossconnect input <in-label> output <IFNAME> <ID-ADDR> {<out-label> | explicit-null}
```

Description

Configures a static LSP binding to swap labels and route to the given next hop.

The `no` form of this command removes the static LSP binding label swap configuration.

Parameter	Description
<code><in-label></code>	Specifies the MPLS label to bind. Range: 16-1048575.
<code><IFNAME></code>	Specifies the egress interface of the binding.
<code><IP-ADDR></code>	Specifies the next hop IP address of the binding.
<code><out-label></code>	Specifies the MPLS label to apply. Range: 16-1048575.
<code>explicit-null</code>	Specifies an IETF MPLS IPv4 explicit null label (0).

Usage

- A static LSP label range must be allocated before configuring static LSP bindings.
- An incoming label must be within the allocated static LSP label range. Outgoing labels are not bound by the allocated static LSP label range, but must still be within the range of 16-1048575.
- The types of valid outgoing interfaces are: System, LAG, VLAN, and Tunnel.
 - Routing must be enabled for egress interfaces.
 - LAG member interfaces cannot be used with this command.
- Next hop and outgoing label pairs must be unique for each crossconnect binding.

Examples

Configuring crossconnect with an incoming and outgoing label:

```
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# crossconnect input 20 output 1/1/2 11.0.3.2 21
```

Configuring explicit-null PHP:

```
switch(config-mpls-static-lsp)# crossconnect input 20 output 1/1/2 11.0.3.2
explicit-null
```

Removing crossconnect binding:

```
switch(config-mpls-static-lsp)# no crossconnect input 20 output 1/1/2 11.0.3.2 21
```

Configuring crossconnect with an incoming label outside the allocated range:

```
switch(config-mpls-static-lsp)# crossconnect input 20 output 11.0.3.2 99
Failed to configure static LSP binding. Incoming label not in range allocated for
static LSP.
```

Configuring crossconnect with an interface that does not have routing enabled:

```
switch(config-mpls-static-lsp)# crossconnect input 20 output 1/1/8 11.0.3.2 21
The egress interface must have an IP address assigned.
```

Configuring crossconnect with a nexthop IP that is not in the same subnet as egress interface:

```
switch(config-if)# int 1/1/1
switch(config-if)# no shutdown
switch(config-if)# ip address 10.0.0.1/24
switch(config-if)# mpls enable
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# crossconnect input 35 output 1/1/1 60.0.0.20 40
The next hop IP address must be in the same subnet as interface 1/1/1.
```

Configuring crossconnect with a nexthop IP that is the same as the egress interface IP:

```
switch(config-if)# int 1/1/1
switch(config-if)# no shutdown
switch(config-if)# ip address 10.0.0.1/24
switch(config-if)# mpls enable
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# crossconnect input 35 output 1/1/1 10.0.0.1 40
The next hop IP address cannot be the same as any interface 1/1/1 primary or
secondary addresses.
```

Configuring crossconnect with a nexthop IP and outgoing label of an already existing binding:

```
switch(config-if)# int 1/1/1
switch(config-if)# no shutdown
switch(config-if)# ip address 10.0.0.1/24
switch(config-if)# mpls enable
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# crossconnect input 35 output 1/1/1 10.0.0.2 40
switch(config-mpls-static-lsp)# crossconnect input 36 output 1/1/1 10.0.0.2 40
A static LSP binding with the same nexthop and outgoing label already exists.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-static-lsp	Administrators or local user group members with execution rights for this command.

enable (mpls globally)

enable
no enable

Description

Enables MPLS forwarding of IPv4 traffic globally.

The `no` form of this command disables MPLS forwarding of IPv4 traffic globally.

Examples

Enabling MPLS forwarding of IPv4 traffic:

```
switch(config)# mpls  
switch(config-mpls)# enable
```

Disabling MPLS forwarding of IPv4 traffic:

```
switch(config)# mpls  
switch(config-mpls)# no enable
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	<code>config-mpls</code>	Administrators or local user group members with execution rights for this command.

enable (mpls ldp)

`enable`
`no enable`

Description

Enables MPLS LDP.

The `no` form of this command disable MPLS LDP.

Usage

- The LDP back off timer cannot be configured. It is set to exponentially back off session retry attempts with initial value of 15 seconds and a maximum of 2 minutes.

Examples

Enabling MPLS LDP:

```
switch(config)# mpls  
switch(config-mpls)# label-protocol ldp  
switch(config-mpls-ldp)# enable
```

Disabling MPLS LDP:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no enable
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-ldp	Administrators or local user group members with execution rights for this command.

enable (mpls static lsp)

```
enable
no enable
```

Description

Enables MPLS static LSPs.

The `no` form of this command disables static LSPs.

Usage

A static LSP binding will be processed when MPLS is globally enabled, static LSP is enabled, and the ingress and egress interface has MPLS enabled.

Examples

Enabling MPLS static LSPs:

```
switch(config)# mpls
switch(config-mpls)# enable
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# enable
```

Disabling static LSPs:

```
switch(config)# mpls
switch(config-mpls)# static-lsp
switch(config-mpls-static-lsp)# no enable
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config config-mpls config-mpls-static-lsp	Administrators or local user group members with execution rights for this command.

enable mpls (interface)

mpls enable
no mpls enable

Description

Enables MPLS forwarding of IP traffic for the interface.

The `no` form of this command disables MPLS forwarding of IP traffic for the interface.

Usage

- Routing must be configured before enabling MPLS on an interface.

Examples

Enabling MPLS forwarding:

```
switch(config)# interface 1/1/1
switch(config-if)# routing
switch(config-if)# mpls enable
```

Enabling MPLS on a layer 2 interface:

```
switch(config)# interface 1/1/2
switch(config-if)# mpls enable
Routing must be enabled on this interface to use MPLS
```

Disabling MPLS forwarding:

```
switch(config)# interface 1/1/2
switch(config-if)# no mpls enable
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-if	Administrators or local user group members with execution rights for this command.

mpls ldp graceful restart timers

```
graceful-restart-timers {forwarding-holding <SECONDS> | max-recovery <SECONDS> |
neighbor-liveness <SECONDS>}
no graceful-restart-timers {forwarding-holding <SECONDS> | max-recovery <SECONDS> |
neighbor-liveness <SECONDS>}
```

Description

Configures MPLS LDP discovery hold time for peers found via hello packets.

The `no` form of this command resets the discovery hello hold time to its default value of 15 seconds.



The BGP restart timer must be configured as 180 seconds or higher for graceful restart to work with MPLS.



It is recommended to configure the OSPF graceful restart timer as lower than the LDP forward-holding timer, which in turn should be configured as lower than the BGP graceful restart timer.

Parameter	Description
<code>forwarding-holding <SECONDS></code>	Specifies the amount of time in seconds that the MPLS forwarding state should be preserved after the control plane restarts. Range: 30-600. Default: 150.
<code>max-recovery <SECONDS></code>	Specifies the amount of time in seconds that the stale label bindings should be kept on the router after the LDP session has been reestablished. Range: 15-600. Default: 120.
<code>neighbor-liveness <SECONDS></code>	Specifies the amount of time in seconds that the router will wait for the LDP session to be reestablished. If the router cannot reestablish the LDP session within that time, the router deletes all the stale LDP bindings received from that LDP neighbor. Range: 5-300. Default: 120.

Examples

Configuring the MPLS LDP graceful restart forwarding holding time for 30 seconds:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# graceful-restart-timers forwarding-holding 30
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.
Continue (y/n)? y
```

Resetting the MPLS LDP graceful restart forwarding holding time to default:

```

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no graceful-restart-timers forwarding-holding
switch(config-mpls-ldp)# no graceful-restart-timers forwarding-holding 30
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.
Continue (y/n)? y

```

Configuring the MPLS LDP graceful restart max recovery time for 30 seconds:

```

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# graceful-restart-timers max-recovery 30
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.

Continue (y/n)? y

```

Resetting the MPLS LDP graceful restart max recovery time to default:

```

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no graceful-restart-timers max-recovery
switch(config-mpls-ldp)# no graceful-restart-timers max-recovery 30
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.

Continue (y/n)? y

```

Configuring the MPLS LDP graceful restart neighbor liveness timefor 30 seconds:

```

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# graceful-restart-timers neighbor-liveness 30
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.

Continue (y/n)? y

```

Resetting the MPLS LDP graceful restart neighbor liveness to default:

```

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no graceful-restart-timers neighbor-liveness
Changing the timer value will restart any LDP sessions.
This may result in traffic loss.

Continue (y/n)? y

```

Command History

Release	Modification
10.10	Command introduced.

Command Information

Platforms	Command context	Authority
8360	config-mpls-ldp	Administrators or local user group members with execution rights for this command.

label-range (static lsp)

```
label-range <start-label-range> <end-label-range>
no label-range <start-label-range> <end-label-range>
```

Description

Allocates MPLS labels for use exclusively by static LSP.

The `no` form of this command removes the configured allocation, returning to the default state with no labels allocated for static LSP usage.

Parameter	Description
<code><start-label-range></code>	Selects the start of the static LSP label range. Range: 16-1048575.
<code><end-label-range></code>	Selects the end of the static LSP label range. Range: 16-1048575.

Usage

- The range arguments are inclusive. Configuring a range of 20-30 will allocate the labels 20, 21, ..., 29, 30.
- Static LSP labels must not overlap with labels used by any other protocol, i.e. LDP. This label range allocation command will fail if any labels are shared between protocols.
- Any change to the static LSP label allocation will fail if any static LSP bindings are configured. All bindings must be removed before the static LSP label range can be reallocated.
- Allocated label range affects only the ingress packets. Labels for the outgoing packets must be within the allocated label range of the next hop device.

Examples

Allocating a valid static LSP label range:

```
switch(config-mpls-static-lsp)# label-range 100 2000
```

Changing the static LSP label range while LSP bindings are configured:

```
switch(config-mpls-static-lsp)# label-range 100 2000
All static LSP bindings must first be deleted.
```

Deallocating static LSP label range; use either command:

```
switch(config-mpls-static-lsp)# no label-range 100 2000
switch(config-mpls-static-lsp)# no label-range
```

Configuring a static LSP range that intersects with LDP:

```
switch(config-mpls-static-lsp)# label-range 30 99  
The static LSP label range cannot overlap with any other MPLS range.
```

Deallocating static LSP range when bindings are still configured:

```
switch(config-mpls-static-lsp)# no label-range  
All static LSP bindings must be removed before removing the label range.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-static-lsp	Administrators or local user group members with execution rights for this command.

label-protocol ldp

```
label-protocol ldp  
no label-protocol ldp
```

Description

Configures the Label Distribution Protocol (LDP).

The **no** form of this command removes all LDP-related configuration.

Examples

Configuring LDP:

```
switch(config-mpls)# label-protocol ldp
```

Removing all LDP-related configuration:

```
switch(config-mpls)# no label-protocol ldp  
All MPLS LDP configuration will be deleted.  
  
Continue (y/n)? y
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls	Administrators or local user group members with execution rights for this command.

mpls

mpls
no mpls

Description

Configures MPLS forwarding of IPv4 traffic globally.

The `no` form of the command removes all MPLS-related configuration.

Examples

Configuring MPLS forwarding for IPv4 traffic:

```
switch(config)# mpls
```

Removing MPLS configuration for IPv4 traffic:

```
switch(config)# no mpls
All MPLS configuration will be deleted.

Continue (y/n)? y
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config	Administrators or local user group members with execution rights for this command.

mpls ldp enable

mpls ldp enable
no mpls ldp enable

Description

Enables LDP protocol in the interface level.

The `no` form of this command disables LDP.

Enabling/disabling interface level LDP will also enable/disable `php-mode-explicit-null` by default. `php-mode-explicit-null` is currently the only mode supported and there is no option to disable it when LDP is enabled on an interface.

Usage

- Routing must be configured before enabling LDP on an interface.
- MPLS must be enabled on the interface prior to enabling LDP.

Examples

Enabling the LDP protocol:

```
switch(config)# interface 1/1/1
switch(config-if)# routing
switch(config-if)# mpls enable
switch(config-if)# mpls ldp enable
```

Enabling LDP prior to enabling MPLS:

```
switch(config)# interface 1/1/2
switch(config-if)# routing
switch(config-if)# mpls ldp enable
MPLS must be enabled on this interface to use LDP.
```

Enabling MPLS on a layer 2 interface:

```
switch(config)# interface 1/1/2
switch(config-if)# mpls ldp enable
Routing must be enabled on this interface to use MPLS.
```

Disabling MPLS forwarding:

```
switch(config)# interface 1/1/2
switch(config-if)# no mpls ldp enable
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-if	Administrators or local user group members with execution rights for this command.

mpls ldp entropy label insertion

entropy label

```
no entropy label
```

Description

Enables MPLS LDP entropy label insertion.

The `no` form of this command disables MPLS LDP entropy label insertion. Label insertion happens at the ingress LER where native packets are encapsulated with MPLS labels for forwarding. Entropy label insertion is disabled by default.

Examples

Enabling MPLS LDP entropy label insertion:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# entropy-label
```

Disabling MPLS LDP entropy label insertion:

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no entropy-label
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-ldp	Administrators or local user group members with execution rights for this command.

mpls ldp discovery hello hold time (global)

```
discovery hello holdtime <SECONDS>
no discovery hello holdtime <SECONDS>
```

Description

Configures MPLS LDP discovery hold time for peers found via hello packets.

The `no` form of this command resets the discovery hello hold time to its default value of 15 seconds.

Parameter	Description
<SECONDS>	Specifies the discovery hold time in seconds. Range: 15-65535. Default: 15.

Usage

- The default value of discovery hello hold time is 15 seconds
- The discovery hello hold time configured on an interface supersedes the global configuration.
- The discovery hello interval time is auto-computed as one third of the hello hold time.

Examples

Configuring the MPLS LDP discovery hello hold time:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# discovery hello holdtime 30
```

Changing discovery hello hold time:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# discovery hello holdtime 50
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-ldp	Administrators or local user group members with execution rights for this command.

mpls ldp discovery hello hold time (interface)

```
mpls ldp discovery hello holdtime <SECONDS>
no mpls ldp discovery hello holdtime <SECONDS>
```

Description

Overrides the global MPLS LDP discovery hold time for peers found via hello packets from the given interface.

The `no` form of this command resets the discovery hello hold time for the given interface to the global value (if configured) or default value of 15 seconds if global value is not specified.

Parameter	Description
<SECONDS>	Specifies the discover hello hold time on an interface. Range: 15-65535. Default: 15.

Usage

- The interface LDP discovery hello hold time overrides global hello hold time.
- Routing must be configured before changing the LDP discovery hold time on an interface.

Examples

Configuring the interface MPLS LDP discovery hello hold time:

```
switch(config)# interface 1/1/1
switch(config-if)# routing
switch(config-if)# mpls ldp discovery hello holdtime 30
```

Removing the interface MPLS LDP discovery hello hold time configuration:

```
switch(config)# interface 1/1/1
switch(config-if)# no mpls ldp discovery hello holdtime
```

Configuring the interface MPLS LDP discovery hello hold time on a Layer 2 interface:

```
switch(config)# interface 1/1/2
switch(config-if)# mpls ldp discovery hello holdtime 30
Routing must be enabled on this interface to use MPLS.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-if	Administrators or local user group members with execution rights for this command.

mpls ldp session holdtime (interface)

```
mpls ldp session holdtime <TIME>
no mpls ldp session holdtime <TIME>
```

Description

Configures MPLS LDP session hold time for an interface.

The **no** form of this command resets the session hold time to its default value of 15 seconds.

Parameter	Description
<TIME>	Specifies the session hold time for the interface in seconds. Range: 15-65535. Default: 40.

Usage

- The interface LDP session hold time overrides global hello hold time.
- Routing must be configured before changing LDP session holdtime on an interface.

Examples

Configuring the MPLS LDP session hold time for an interface:

```
switch(config)# interface 1/1/1
switch(config-if)# routing
switch(config-if)# mpls ldp session holdtime 30
```

Removing the MPLS LDP session hold time for the interface:

```
switch(config)# interface 1/1/1
switch(config-if)# no mpls ldp session holdtime 30
```

Configuring the MPLS LDP session hold time on a layer 2 interface:

```
switch(config)# interface 1/1/2
switch(config-if)# mpls ldp session holdtime 30
Routing must be enabled on this interface to use MPLS.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-if	Administrators or local user group members with execution rights for this command.

ping mpls

```
ping mpls ipv4 <IP-ADDR/MASK> [source <IP-ADDR> | destination <IP-ADDR> | ttl <HOPS> |
size <BYTES> | repeat <NUMBER> | timeout <TIME> | interval <TIME>]
```

Description

Ping MPLS is a command which sends LSP ping packets on the MPLS network and displays the responses from the remote target. It is used a debugging and analytics tool to verify connectivity within MPLS networks.

Parameter	Description
ipv4 <IP-ADDR/MASK>	Specifies target IP address and mask of the remote subnet to ping.
source <IP-ADDR>	Specifies the source IPv4 address for the request packet.

Parameter	Description
destination <IP-ADDR>	Specifies the destination address for the request packet. Default: 127.0.0.1.
ttl <HOPS>	Specifies the max number of hops a packet can take en route to its destination. Range: 1-255. Default: 64.
size <BYTES>	Specifies the size of the packet to be sent in bytes. Range: 0-9600. Default: 0.
repeat <NUMBER>	Specifies the number of packets to be sent. Range 1-10000. Default: 5.
timeout <TIME>	Specifies the amount of time in seconds after which a packet is considered dropped. Range 1-60. Default: 2.
interval <TIME>	Specifies the interval time between packets in seconds. Range: 1-60 seconds. Default: 1.

Examples

Sending 5 successful pings to the destination to the 10.10.10.10/32 subnet with a source IP address 20.20.20.1, a destination IP of 127.0.0.1, a zero byte payload, 64 hop time to live, 3 second interval between packets, and a 5 second timeout:

```
switch# ping mpls ipv4 10.10.10.10/32 source 20.20.20.1 destination 127.0.0.1
repeat 5 size 0 ttl 64 interval 3 timeout 5
Sending 5 MPLS Echo packets of size 0 bytes to 10.10.10.0/32 from source
20.20.20.1,
timeout is 5 sec, send interval is 3 sec:
Codes: '!' - success, 'Q' - request not sent, '.' - timeout,
        'U' - unreachable, 'M' - malformed request, 'T' - unsupported TLV,
        'E' - malformed response, 'R' - transit router
Type escape sequence (Ctrl + C) to abort.
!!!!
1908 Success rate is 100 percent (5/5), round-trip min/avg/max = 7/10/13 ms
```

Sending an unsuccessful ping that fails because the network is unreachable:

```
switch# ping mpls ipv4 10.10.10.10/32 source 20.20.20.1 destination 127.0.0.1
repeat 5 size 0
Sending 5 MPLS Echo packets of size 0 bytes to 10.10.10.0/32 from source
20.20.20.1,
timeout is 2 sec, send interval is 1 sec:
Codes: '!' - success, 'Q' - request not sent, '.' - timeout,
        'U' - unreachable, 'M' - malformed request, 'T' - unsupported TLV,
        'E' - malformed response, 'R' - transit router
Type escape sequence (Ctrl + C) to abort.
Network unreachable
```

Command History

Release	Modification
10.10	Command introduced

Command Information

Platforms	Command context	Authority
8360	Manager (#)	Administrators or local user group members with execution rights for this command.

router-id (mpls ldp)

```
router-id <IFNAME> [confirm]
no router-id <IFNAME> [confirm]
```

Description

Configures MPLS LDP router ID which is the IP address of a loopback interface. The `no` form of this command removes the MPLS LDP router ID configuration.

Parameter	Description
<IFNAME>	Specifies the loopback interface for the MPLS LDP router ID.

Usage

- There is a possibility of MPLS traffic disruption whenever a router ID is deleted or updated to another loopback interface.
- The MPLS router ID interface must be a loopback interface with an IPv4 address configured.
- The confirmation prompt is skipped if the router ID is being configured for the first time by the user.
- Changing the IP address of the loopback interface may interrupt MPLS traffic.

Examples

Configuring an MPLS LDP router ID:

```
switch(config)# interface loopback 1
switch(config-loopback-if)# ip address 1.1.1.1/32

switch(config)# mpls
switch(config-mpls)# enable
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# enable
switch(config-mpls-ldp)# router-id loopback1
```

Changing the MPLS LDP router ID loopback interface:

```
switch(config)# interface loopback 2
switch(config-loopback-if)# ip address 2.2.2.2/32

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# router-id loopback2
Changing the router ID interface may disrupt MPLS traffic.

Continue (y/n)?
```

Changing the MPLS LDP router ID interface without prompting for confirmation:

```
switch(config)# interface loopback 2
switch(config-loopback-if)# ip address 2.2.2.2/24

switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# router-id loopback2 confirm
```

Removing the MPLS LDP router ID configuration:

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no router-id loopback2
Removing the router ID interface may disrupt MPLS traffic.

Continue (y/n)?
```

Removing the MPLS LDP router ID without providing loopback interface name:

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no router-id
Removing the router ID interface may disrupt MPLS traffic.

Continue (y/n)?
```

Removing the configuration of an MPLS LDP router ID with an interface name which is different than the one configured as router ID:

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# router-id loopback1 confirm
switch(config-mpls-ldp)# no router-id loopback2
The value to disable does not match the currently configured value.
```

Removing the MPLS LDP router ID configuration prompting for confirmation:

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# no router-id loopback2 confirm
```

Configuring an MPLS LDP router ID with system interface:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# enable
switch(config-mpls-ldp)# router-id 1/1/1
The router ID must be a loopback interface with an IP address assigned.
```

Configuring MPLS LDP router ID with a loopback interface without an IPv4 address configured:

```
switch(config)# interface loopback 1

switch(config)# mpls
```

```
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# enable
switch(config-mpls-ldp)# router-id loopback1
The router ID interface must have an IP address assigned.
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-loopback-if config-mpls-ldp	Administrators or local user group members with execution rights for this command.

session hold time (mpls ldp globally)

```
session holdtime <SECONDS>
no session holdtime <SECONDS>
```

Description

Configures MPLS LDP session hold time.

The `no` form of this command resets the session hold time to its default value of 40 seconds.

Parameter	Description
<SECONDS>	Specifies the session hold time in seconds. Range: 15-65535. Default: 40.

Usage

- The default session hold time is 40 seconds
- The session hold time configured on an interface supersedes the global configuration.
- The session keepalive interval time is auto computed as one sixth of the hold time.

Examples

Configuring the MPLS LDP session hold time:

```
switch(config)# mpls
switch(config-mpls)# label-protocol ldp
switch(config-mpls-ldp)# session holdtime 30
```

Changing the session hold time:

```
switch(config)# mpls  
switch(config-mpls)# label-protocol ldp  
switch(switch(config-mpls-ldp)# session holdtime 50)# session holdtime 50
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls-ldp	Administrators or local user group members with execution rights for this command.

show bgp vpnv4 unicast

```
show bgp VPNv4 unicast [[<IP-ADDR>/<MASK>] | community | extcommunity |  
neighbors [<IP-ADDR>] | paths | summary | vsx-peer]
```

Description

Shows all vpnv4 entries in the BGP routing table .

Parameter	Description
<IP-ADDR>/<MASK>	Specifies the IP network and mask of a specific BGP route in IPv4 format (x.x.x.x/M), where x is a decimal number from 0 to 255 and M is the number of bits in CIDR format from 0 to 32.
community	Selects routes that belong to specified BGP communities.
extcommunity	Selects unicast routes with extended communities.
neighbors [<IP-ADDR>]	Selects BGP neighbor connection parameters for all neighbors or the IP address of a specific neighbor in IPv4 format (x.x.x.x) where x is a decimal number from 0 to 255.
paths	Selects AS Path information of the vpnv4 routes in BGP RIB.
summary	Selects a summary of BGP neighbor status.
vsx-peer	Selects VSX peer switch information.

Examples

Showing all VPNv4 entries in the BGP routing table:

```
switch# show bgp vpnv4 unicast  
VRF : default  
BGP Summary  
-----
```

```

Local AS          : 100          BGP Router Identifier : 4.4.4.4
Peers             : 0            Log Neighbor Changes  : No
Cfg. Hold Time    : 180         Cfg. Keep Alive       : 60
Confederation Id  : 0

PE2# show bgp vpnv4 unicast
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
              i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 4.4.4.4

      Network          Nexthop      Metric    LocPrf    Weight Path
Route Distinguisher: 100:100          (Label 22)
*>i 11.1.1.0/30      1.1.1.1          0         100        0        ?

Route Distinguisher: 1.1.1.1:200      (Label 23)
*>i 11.1.2.0/30      1.1.1.1          0         100        0        ?

Route Distinguisher: 100:300          (Label 24)
*>i 11.1.3.0/30      1.1.1.1          0         100        0        ?

Route Distinguisher: 100:400          (Label 25)
*>i 11.1.4.0/30      1.1.1.1          0         100        0        ?
Total number of entries 4

```

Showing entries in the BGP routing table for the *11.1.3.0/30* network:

```

switch# show bgp vpnv4 unicast 11.1.3.0/30

VRF : default
BGP Local AS 100          BGP Router-id 4.4.4.4

      Network          : 11.1.3.0/30          Nexthop          : 1.1.1.1
      Peer              : 1.1.1.1              Origin           : incomplete
      Metric            : 0                    Local Pref       : 100
      Weight            : 0                    Calc. Local Pref : 100
      Best              : Yes                  Valid            : Yes
      Type              : internal              Stale            : No
      Originator ID     : 0.0.0.0              Path ID          : 0
      Aggregator ID     :
      Aggregator AS     :
      Atomic Aggregate   :

      AS-Path           :
      Cluster List      :
      Communities       :
      Ext-Communities   :

```

Showing entries in the BGP routing table for routes with extended communities:

```

switch# show bgp vpnv4 unicast extcommunity

Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
              i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default

```

Local Router-ID 4.4.4.4

Network	Next Hop	Ecommunity
*>i 11.1.1.0/30	1.1.1.1	100:100
*>i 11.1.2.0/30	1.1.1.1	4.4.4.4:200
*>i 11.1.3.0/30	1.1.1.1	100:300
*>i 11.1.4.0/30	1.1.1.1	100:400

Total number of entries 4

Showing BGP neighbor connection parameters for all neighbors:

switch# **show bgp vpnv4 unicast neighbors**

Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 1.1.1.1 (Internal)

Description : MPBGP Session to PE2
Peer-group :

Remote Router Id	: 1.1.1.1	Local Router Id	: 4.4.4.4
Remote AS	: 100	Local AS	: 100
Remote Port	: 179	Local Port	: 38335
State	: Established	Admin Status	: Up
Conn. Established	: 1	Conn. Dropped	: 0
Passive	: No	Update-Source	: loopback0
Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Neg. Hold Time	: 180	Neg. Keep Alive	: 60
Up/Down Time	: 00h:56m:46s	Connect-Retry Time	: 120
Local-AS Prepend	: No	Alt. Local-AS	: 0
BFD	: Disabled		
Password	:		
Last Err Sent	: No Error		
Last SubErr Sent	: No Error		
Last Err Rcvd	: No Error		
Last SubErr Rcvd	: No Error		
Graceful-Restart	: Enabled	Gr. Restart Time	: 120
Gr. Stalepath Time	: 300	Remove Private-AS	: No
TTL	: 255	Local Cluster-ID	:
Weight	: 0	Fall-over	: No
Confederation-Peers	: No		

Message statistics	Sent	Rcvd
-----	----	----
Open	1	1
Notification	0	0
Updates	7	7
Keepalives	64	65
Route Refresh	0	0
Total	72	73

Capability	Advertised	Received
-----	-----	-----
Route Refresh	Yes	Yes
Graceful Restart	Yes	Yes
Add-Path	No	No

Four Octet ASN	Yes	Yes
Address family IPv4 Unicast	No	No
Address family IPv6 Unicast	No	No
Address family VPNv4 Unicast	Yes	Yes
Address family L2VPN EVPN	No	No

Address Family : VPNv4 Unicast

Rt. Reflect. Client	: No	Send Community	: both
Allow-AS in	: 0	Advt. Interval	: 30
Max. Prefix	: 32500	Soft Reconfig In	:
Nexthop-Self	:	Default-Originate	:
Cfg. Add-Path	:		
Neg. Add-Path	:		
Routemap In	:		
Routemap Out	:		
ORF type	: Prefix-list		
ORF capability	:		

Showing BGP neighbor connection parameters for the neighbor with IP address 1.1.1.1:

```
switch# show bgp vpnv4 unicast neighbors 1.1.1.1
Codes: ^ Inherited from peer-group

VRF : default

BGP Neighbor 1.1.1.1 (Internal)
  Description      : MPBGP Session to PE2
  Peer-group      :

  Remote Router Id : 1.1.1.1          Local Router Id : 4.4.4.4
  Remote AS        : 100              Local AS        : 100
  Remote Port      : 179              Local Port      : 38335
  State            : Established      Admin Status    : Up
  Conn. Established : 1               Conn. Dropped   : 0
  Passive          : No               Update-Source    : loopback0
  Cfg. Hold Time   : 180              Cfg. Keep Alive : 60
  Neg. Hold Time   : 180              Neg. Keep Alive  : 60
  Up/Down Time     : 00h:58m:52s      Connect-Retry Time : 120
  Local-AS Prepend : No               Alt. Local-AS    : 0
  BFD              : Disabled
  Password         :
  Last Err Sent    : No Error
  Last SubErr Sent : No Error
  Last Err Rcvd    : No Error
  Last SubErr Rcvd : No Error

  Graceful-Restart  : Enabled          Gr. Restart Time : 120
  Gr. Stalepath Time : 300             Remove Private-AS : No
  TTL               : 255              Local Cluster-ID  :
  Weight            : 0                Fall-over         : No
  Confederation-Peers : No

  Message statistics      Sent      Rcvd
  -----
  Open                    1          1
  Notification            0          0
  Updates                  7          7
  Keepalives              67         67
```

```

Route Refresh          0          0
Total                  75          75

Capability
-----
Route Refresh          Yes          Yes
Graceful Restart       Yes          Yes
Add-Path               No           No
Four Octet ASN         Yes          Yes
Address family IPv4 Unicast No           No
Address family IPv6 Unicast No           No
Address family VPNv4 Unicast Yes          Yes
Address family L2VPN EVPN No           No
Address Family : VPNv4 Unicast

-----

Rt. Reflect. Client : No          Send Community      : both
Allow-AS in         : 0           Advt. Interval      : 30
Max. Prefix         : 32500       Soft Reconfig In    :
Nexthop-Self        :             Default-Originate      :
Cfg. Add-Path       :
Neg. Add-Path        :

Routemap In         :
Routemap Out        :
ORF type            : Prefix-list
ORF capability       :

```

Showing AS Path information of the vpnv4 routes in BGP RIB:

```

switch# show bgp vpnv4 unicast paths
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
VRF : default
Local Router-ID 4.4.4.4

   Network          Next Hop      PathID    Path
Route Distinguisher: 100:100          (Label 22)
* i 11.1.1.0/30      1.1.1.1      0         ?
Route Distinguisher: 1.1.1.1:200      (Label 23)
* i 11.1.2.0/30      1.1.1.1      0         ?
Route Distinguisher: 100:300          (Label 24)
* i 11.1.3.0/30      1.1.1.1      0         ?
Route Distinguisher: 100:400          (Label 25)
* i 11.1.4.0/30      1.1.1.1      0         ?
Total number of entries 4

```

Showing a summary of BGP neighbor status:

```

switch(config-bgp)# show bgp vpnv4 unicast summary
VRF : default
BGP Summary
Local AS           : 100          BGP Router Identifier : 4.4.4.4
Peers              : 0           Log Neighbor Changes  : No

```

Cfg. Hold Time	: 180	Cfg. Keep Alive	: 60
Confederation Id	: 0		

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show capacities mpls

```
show capacities mpls
show capacities-status mpls
```

Description

For capacities command, shows the maximum number of label endpoints, label switch entries, and service label entries that can be configured on the device. For capacities-status command, shows the total number of label endpoints, label switch entries, and service label entries that are currently configured on the device.

Examples

Showing capacities of configurable MPLS options:

```
switch# show capacities mpls
System Capacities: Filter MPLS
Capacities Name
Value
-----
Maximum number of MPLS Label Endpoints configurable in a system
8192
Maximum number of MPLS Label Switch entries configurable in a system
8192
Maximum number of MPLS Service Label entries configurable in a system
8192
```

Showing the configuration of currently configured MPLS options in relation to their capacities:

```
switch# show capacities-status mpls
System Capacities Status: Filter MPLS
Capacities Status Name
Value Maximum
-----
```

```

Number of MPLS Label Endpoints currently configured
                                0      8192
Number of MPLS Label Switch entries currently configured
                                0      8192
Number of MPLS Service Label entries currently configured
                                0      8192

```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Manager (#)	Administrators or local user group members with execution rights for this command.

show mpls forwarding

show mpls forwarding [detail]

Description

Shows the MPLS forwarding table.

Usage

- Forwarding table filters will be implemented at a later date.
- When running this command on a huge-scale setup, showing the full tables might take a while.

Examples

Showing the MPLS forwarding table:

```

switch# show mpls forwarding
MPLS Bindings
Entry Bindings      : 2
Exit Bindings       : 2
Transit Bindings    : 1
PHP Mode            : Explicit-Null
QoS Mode            : Uniform
TTL Propagation     : Uniform
Entry Bindings:
Origin Prefix      Ingress      Nexthop      Outgoing
Egress            Egress      Status
VRF               Address      Label        Interface    VRF
-----
LDP               4.4.4.4/32      default      192.168.10.2  3002         1/1/6
                  default      operational
BGP               20.20.20.0/24   vrf-blue     4.4.4.4       5001         1/1/6
                  default      operational

```

```

Exit Bindings:
Origin   Prefix      Incoming  Service  Egress      Status
Label    Label      VRF
-----
static   n/a          exp-null  -        default     operational
BGP      n/a          imp-null  2001     vrf-blue    operational
Transit Bindings:
Origin   Prefix      Incoming  Egress      Egress      NextHop
Label    Outgoing   Status    Address      Label
Interface VRF
-----
LDP      4.4.4.4/32  2002     1/1/6       default
192.168.10.2 3002      operational

```

```

switch# show mpls forwarding detail
MPLS Bindings
Entry Bindings : 2
Exit Bindings : 2
Transit Bindings : 1
PHP Mode : Explicit-Null
QoS Mode : Uniform
TTL Propagation : Uniform
Entry Bindings:
Origin   Prefix      Ingress      NextHop      Outgoing      Tx
Egress   Egress      Status      Tx Packets
Bytes
VRF      Address      Label      Interface      VRF
-----
LDP      4.4.4.4/32  default      192.168.10.2  3002          1/1/6
          default      operational      99
BGP      20.20.20.0/24 vrf-blue      4.4.4.4        5001          1/1/6
          default      operational      66
Exit Bindings:
Origin   Prefix      Incoming  Service  Egress      Status
Label    Rx Packets  Rx Bytes
Label    Label      VRF
-----
static   n/a          exp-null  -        default     operational
          33          44
BGP      n/a          imp-null  2001     vrf-blue    operational
          22          33
Transit Bindings:
Origin   Prefix      Incoming  Egress      Egress      NextHop
Label    Outgoing   Status    Rx Packets  Rx Bytes
Tx Packets Outgoing   Status    Address      Label
Interface VRF
-----
LDP      4.4.4.4/32  2002     1/1/6       default
192.168.10.2 3002      operational 11
22          22          33

```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show mpls label-range static-lsp

`show mpls label-range static-lsp`

Description

Shows the range of MPLS labels allocated for use in static LSP bindings and the range of labels currently used by static LSP bindings.

Examples

Showing the range and usage of static LSp labels on the switch:

```
switch# show mpls label-range static-lsp

Static LSP Labels

Allocated : 16-100
In use    : 16-30,35
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show mpls ldp bindings

`show mpls ldp bindings`

Description

Shows information about all MPLS LDP bindings.

Examples

Showing information about MPLS LDP bindings:

```
switch# show mpls ldp bindings

10.10.2.0/24
  local binding: label: imp-null
  remote binding: lsr:10.255.255.255:0, label:16
  remote binding: lsr:10.256.256.256:0, label: exp-null
10.10.3.0/24
  local binding: label:20
  remote binding: lsr:10.256.256.256:0, label:22
5.43.9.98/32
  local binding: label:21
  No remote binding
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show mpls ldp discovery

```
show mpls ldp discovery [<IP-ADDR>]
no syntax
```

Description

Shows information about discovered LDP peers.

Parameter	Description
<IP-ADDR>	Specifies the peer MPLS LDP router ID in x.x.x.x format, where x is a decimal value from 0 to 255.

Examples

Showing information about discovered LDP peers:

```
switch# show mpls ldp discovery
Local LDP Identifier: 10.44.44.44:0
Discovery Sources:
  Interfaces:
    1/1/1 : recv
    LDP Id: 10.33.33.33:0, Transport address: 10.33.33.33
    Path vector limit: 10
    Distribution type: Downstream-on-demand
```

```

Adjacency type: Link
Hold time: 15 sec (local: 15 sec, peer: 15 sec, remaining: 10s)
BFD status: Activating
1/1/2 : recv
LDP Id: 10.33.33.34:0, Transport address: 10.33.33.33
Path vector limit: 10
Distribution type: Downstream-unsolicited
Adjacency type: Targeted
Hold time: 15 sec (local: 15 sec, peer: 15 sec, remaining: 10s)
BFD status: Active

Local LDP Identifier: 10.44.44.44:2
Discovery Sources:
  Interfaces:
    1/1/3 : recv
    LDP Id: 10.33.38.33:0, Transport address: 10.43.33.33
    Path vector limit: 10
    Distribution type: Downstream-unsolicited
    Adjacency type: Link
    Hold time: 15 sec (local: 15 sec, peer: 15 sec, remaining: 10s)
    BFD status: Active

```

Showing information about a specific LDP peer:

```

switch# show mpls ldp discovery 10.33.33.34
Local LDP Identifier: 10.44.44.44:0
Discovery Sources:
  Interfaces:
    1/1/2 : recv
    LDP Id: 10.33.33.34:0, Transport address: 10.33.33.33
    Path vector limit: 10
    Distribution type: Downstream-unsolicited
    Adjacency type: Targeted
    Hold time: 15 sec (local: 15 sec, peer: 15 sec, remaining: 10s)
    BFD status: Active

```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show mpls ldp graceful-restart

```
show mpls ldp graceful-restart
```

Description

Shows graceful restart parameters and status.

Examples

Showing graceful restart parameters and status when graceful restart is not configured:

```
switch# show mpls ldp graceful-restart
Max recovery time           : 50 sec
Neighbor liveness time     : 50 sec
Forwarding holding time    : 70 sec
Number of graceful restart events : 7
Graceful restart in progress : true
Forwarding holding time remaining : 300 sec
Current graceful restart status : in-progress
Graceful restart exit history (last 5) : complete, complete, complete, cancelled, cancelled
```

Command History

Release	Modification
10.10	Command introduced.

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show mpls ldp neighbor

```
show mpls ldp neighbor
```

Description

Shows information about LDP neighbors in the current session(s). The reconnect and recovery time are the times advertised by the peer device.

Examples

Showing LDP neighbors:

```
switch# show mpls ldp neighbor
Local LDP Identifier: 10.44.44.44:0, Peer LDP Identifier: 10.22.22.22:0
  TCP connection: 10.22.22.22:646 - 10.33.33.33:65530
  Graceful Restart: No
  Session Holdtime: 180 sec
  State: Operational; Msgs sent/rcvd: 46/43
  Up time: 00:31:21
  LDP Discovery Sources: 1/1/1
  Addresses bound to this peer:
    10.22.22.22 10.10.2.1
```

Showing LDP neighbors when graceful restart has been configured:

```
switch# show mpls ldp neighbor
Local LDP Identifier: 1.1.1.1:0, Peer LDP Identifier: 11.1.1.2:0
Graceful Restart: Yes
Peer Reconnect Time: 120 sec
Peer Recovery Time: 300 sec
Session Holdtime: 40 sec
Up time: 00:02:59
State: operational
LDP Discovery Sources: 1/1/32
Addresses bound to this peer:
    11.1.1.2 12.1.1.1 2.2.2.2
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

static-lsp

```
static-lsp
no static-lsp
```

Description

Configures MPLS static Label Switched Paths (LSP).

The `no` form of this command removes all static LSP configurations including label range allocation and static LSP binding.

Examples

Configuring MPLS static LSP:

```
switch(config-mpls)# static-lsp
```

Removing MPLS static LSP configuration:

```
switch(config-mpls)# no static-lsp
```

Command History

Release	Modification
10.09	Command introduced

Command Information

Platforms	Command context	Authority
8360	config-mpls	Administrators or local user group members with execution rights for this command.

traceroute mpls

```
traceroute mpls ipv4 <IP-ADDR/MASK> [source <IP-ADDR> | destination <IP-ADDR> | ttl <HOPS> | timeout <TIME> | fed-type ldp]
```

Description

Send LSP ping packets on the MPLS network and display the responses all intermediate routers as well as the destination host. Use this command as a debugging and analytics tool to verify connectivity within the MPLS networks.

Parameter	Description
ipv4 <IP-ADDR/MASK>	Specifies the IP address and netmask of the remote subnet to traceroute.
source <IP-ADDR>	Specifies the source IPv4 address for the request packet.
destination <IP-ADDR>	Specifies the destination IPv4 address for the request packet
ttl <HOPS>	Specifies the max number of hops a packet can take en route to its destination. Range: 1-255. Default: 255.
timeout <SECONDS>	Specifies the number of seconds after which a packet is considered dropped. Range: 1-60 seconds. Default: 2.
fec-type ldp	Selects the target Forward Equivalence Class (FEC) type. The only supported option is the default value of ldp.

Example

Successfully tracing the route a target with IP address 1.1.4.1/32 with a maximum TTL of 3 hops and a 3 second timeout:

```
switch# traceroute mpls ipv4 1.1.4.1/32 ttl 3 timeout 3
Tracing MPLS Label Switched Path to 1.1.4.1/32 from source 10.0.0.2,
timeout is 3 seconds and ttl is 3

Codes: '!' - success, 'Q' - request not sent, '.' - timeout, 'N' - no label entry,
'R' - transit router, 'D' - DS Map mismatch, 'F' - no FEC mapping,
'M' - malformed request, 'T' - unsupported tlvs, 'Z' - return code 0

Type escape sequence to abort.
 0 10.0.0.2 MRU 1500 [Labels: 17]
R 1 10.0.0.1 MRU 1500 [Labels: explicit-null] 10 ms
! 2 10.0.1.2 1 ms
```

Command History

Release	Modification
10.10	Command introduced

Command Information


Platforms	Command context	Authority
8360	config-mpls	Administrators or local user group members with execution rights for this command.

Debugging and troubleshooting

The following is recommended prior to beginning the troubleshooting process:

- Have a topology diagram ready
- Ensure IPs, interface, and AS details are included
- Check physical cabling and generate `show tech` when opening a TAC case
- Check network:
 - Run `show LLDP neighbor`
 - Ensure unicast network works using ping and traceroute between loopbacks and interfaces
 - Fix any issues found

The figure below provides an example:

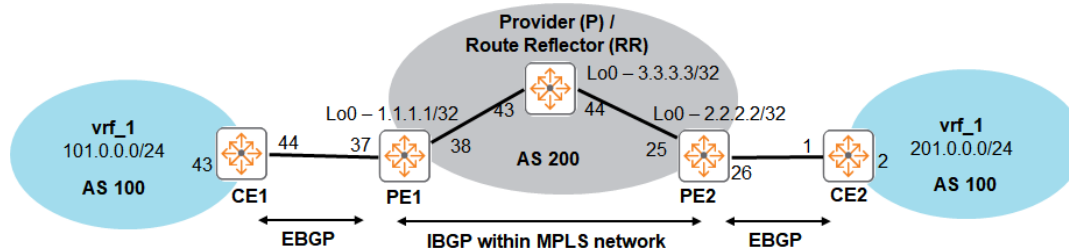

Mirror traffic and packet capture if required:


```
mirror session 1
  enable
  destination interface 1/1/40
  source interface 1/1/51 both
```

If requested by TAC engineer:

```
diagnostics
diag-dump mpls basic

debug mpls all
sh debug buffer
no debug all
```

The recommended MPLS troubleshooting flow is provided in the diagram below.

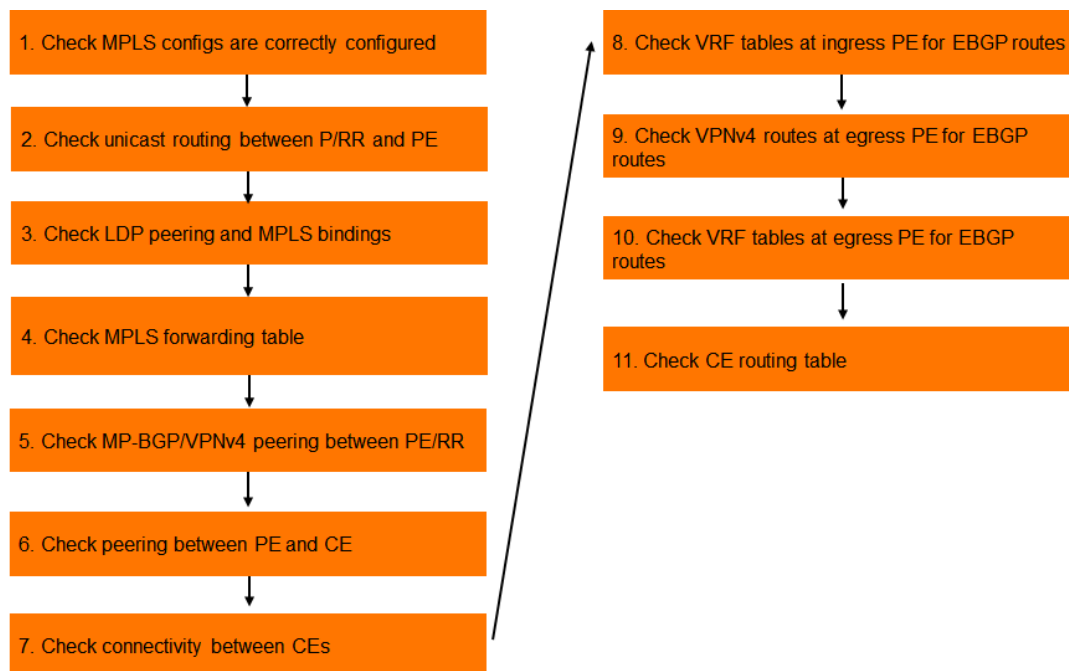

Troubleshooting steps

Follow the process outlines below to troubleshoot MPLS-related issues:

Step 1: Verify that MPLS configurations are correct

Refer to the [Use cases](#) section for CE, PE and P sample configurations.

Step 2: Check unicast routing between P/RR and PE

On PE, verify loopbacks from remote P and PE have been learned. If not seen, verify that OSPF is enabled and advertising loopbacks on remote P and PE:

```

PE1# show ip route

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
               R - RIP, B - BGP, O - OSPF
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
               IA - OSPF internal area, E1 - OSPF external type 1
               E2 - OSPF external type 2

VRF: default

Prefix      Nexthop      Interface      VRF(egress)      Origin/
Distance/   Age                                     Type      Metric
-----
1.1.1.1/32   -                loopback0      -                L          [0/0]
-
2.2.2.2/32   30.0.0.2         1/1/38         -                O
  
```

```

[110/20]      00h:12m:32s
3.3.3.3/32      30.0.0.2      1/1/38      -      O
[110/10]      00h:12m:52s
30.0.0.0/24      -      1/1/38      -      C      [0/0]
-
30.0.0.1/32      -      1/1/38      -      L      [0/0]
-
30.1.0.0/24      30.0.0.2      1/1/38      -      O
[110/20]      00h:12m:52s

Total Route Count : 6

```

Step 3: Check LDP peering and MPLS bindings

Verify LDP neighbor is up:

```

PE1# show mpls ldp neighbor
Local LDP Identifier: 1.1.1.1:0, Peer LDP Identifier: 3.3.3.3:0
  Graceful Restart: No
  Session Holdtime: 40 sec
  Up time: 00:13:49
  State: operational
  LDP Discovery Sources: 1/1/38
  Addresses bound to this peer:
    3.3.3.3 30.0.0.2 30.1.0.1

```

Verify labels and MPLS bindings for remote P and PE exist:

```

PE1# show mpls ldp bindings
30.1.0.1/32
  No local binding
  remote binding: lsr:3.3.3.3:0 label: exp-null
1.1.1.1/32
  local binding: label: exp-null
  remote binding: lsr:3.3.3.3:0 label:16
30.0.0.1/32
  local binding: label: exp-null
  No remote binding
30.0.0.2/32
  No local binding
  remote binding: lsr:3.3.3.3:0 label: exp-null
3.3.3.3/32
  local binding: label: 17
  remote binding: lsr:3.3.3.3:0 label: exp-null
2.2.2.2/32
  local binding: label: 18
  remote binding: lsr:3.3.3.3:0 label:17

```

If the bolded examples are not seen, verify that remote PE has LDP established.

Step 4: Check MPLS forwarding table

Verify nexthop, labels, and routes exist for remote VPNv4 (outgoing label 18) and PE (outgoing label 17):

```

PE1# show mpls forwarding

```

MPLS Bindings

Entry Bindings : 4
Exit Bindings : 3
Transit Bindings : 2

Entry Bindings:

Origin	Prefix	Ingress VRF	Nexthop Address	Outgoing Label	Egress Interface	Egress VRF	Status
--------	--------	----------------	--------------------	-------------------	---------------------	---------------	--------

LDP	2.2.2.2/32	default	30.0.0.2	17	1/1/38	default	operational
LDP	3.3.3.3/32	default	30.0.0.2	exp-null	1/1/38	default	operational
BGP	20.2.0.0/24	vrf_1	2.2.2.2	18	1/1/38	default	operational
BGP	201.0.0.0/24	vrf_1	2.2.2.2	18	1/1/38	default	operational

Exit Bindings:

Origin	Prefix	Incoming Label	Service Label	Egress VRF	Status
static	n/a	exp-null	-	default	operational
BGP	n/a	imp-null	16	vrf_1	operational
static	n/a	7	-	default	operational

Step 5: Check MP-BGP VPNv4 peering between PE/RR

Verify that MP-BGP VPNv4 peering is established. If it's down, verify and fix network reachability between source and destination peering IPs.

```
PE1# show bgp vpnv4 un neighbors
Codes: ^ Inherited from peer-group
```

VRF : default

BGP Neighbor 3.3.3.3 (Internal)

Description :

Peer-group :

Remote Router Id	: 3.3.3.3	Local Router Id	: 1.1.1.1
Remote AS	: 200	Local AS	: 200
Remote Port	: 43923	Local Port	: 179
State	: Established	Admin Status	: Up
Conn. Established	: 2	Conn. Dropped	: 1
Passive	: No	Update-Source	: loopback0

Step 6: Check peering between PE and CE

Verify EBGP peering to CE on the PE

```

PE1# show bgp vrf vrf_1 ipv4 unicast neighbors
Codes: ^ Inherited from peer-group

VRF : vrf_1

BGP Neighbor 20.1.0.1 (External)
  Description      :
  Peer-group       :

  Remote Router Id   : 20.1.0.1           Local Router Id   : 20.1.0.2
  Remote AS          : 100                 Local AS          : 200
  Remote Port        : 51588               Local Port        : 179
  State              : Established         Admin Status      : Up
  Conn. Established  : 1                   Conn. Dropped     : 0
  Passive            : No                  Update-Source     :
  Cfg. Hold Time     : 180                 Cfg. Keep Alive   : 60
  Neg. Hold Time     : 180                 Neg. Keep Alive   : 60
  Up/Down Time       : 00h:20m:28s         Connect-Retry Time : 120
  Local-AS Prepend   : No                  Alt. Local-AS     : 0
  BFD                : Disabled
  Password           :
  Last Err Sent      : Cease
  Last SubErr Sent   : Administrative Shutdown
  Last Err Rcvd      : No Error
  Last SubErr Rcvd   : No Error

```

Step 7: Check connectivity between PEs and between CEs

Ping from CE to remote CE WAN and LAN to verify MPLS L3 VPN connectivity:

```

CE1# ping 20.2.0.2
PING 20.2.0.2 (20.2.0.2) 100(128) bytes of data.
108 bytes from 20.2.0.2: icmp_seq=1 ttl=61 time=0.307 ms
108 bytes from 20.2.0.2: icmp_seq=2 ttl=61 time=0.328 ms
108 bytes from 20.2.0.2: icmp_seq=3 ttl=61 time=0.340 ms
108 bytes from 20.2.0.2: icmp_seq=4 ttl=61 time=0.335 ms
108 bytes from 20.2.0.2: icmp_seq=5 ttl=61 time=0.354 ms

```

Traceroute from CE to remote CE to verify the hop information over MPLS L3 VPN:

```

CE1# traceroute 20.2.0.2
traceroute to 20.2.0.2 (20.2.0.2), 1 hops min, 30 hops max, 3 sec. timeout, 3
probes
 1  20.1.0.2  0.177ms  0.121ms  0.087ms
 2  30.0.0.2  0.233ms  0.120ms  0.122ms
 3  30.1.0.2  0.260ms  0.123ms  0.125ms
 4  20.2.0.2  0.189ms  0.149ms  0.144ms

```

Ping from PE to remote PE to verify MPLS L3 VPN connectivity:

```

PE1# ping 20.2.0.1 vrf vrf_1
PING 20.2.0.1 (20.2.0.1) 100(128) bytes of data.
108 bytes from 20.2.0.1: icmp_seq=1 ttl=60 time=0.334 ms
108 bytes from 20.2.0.1: icmp_seq=2 ttl=60 time=0.279 ms
108 bytes from 20.2.0.1: icmp_seq=3 ttl=60 time=0.280 ms
108 bytes from 20.2.0.1: icmp_seq=4 ttl=60 time=0.315 ms
108 bytes from 20.2.0.1: icmp_seq=5 ttl=60 time=0.291 ms

```

```

--- 20.2.0.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4091ms
rtt min/avg/max/mdev = 0.279/0.299/0.334/0.021 ms

```

Traceroute from PE to remote PE to verify hop information over MPLS L3 VPN:

```

PE1# traceroute 20.2.0.1 vrf vrf_1
traceroute to 20.2.0.1 (20.2.0.1), 1 hops min, 30 hops max, 3 sec. timeout, 3
probes
 1  30.0.0.2  0.224ms  0.156ms  0.158ms
 2  30.1.0.2  0.186ms  0.138ms  0.136ms
 3  20.2.0.1  0.160ms  0.147ms  0.127ms

```

Step 8: Check VRF tables at ingress PE for EBGp routes

On ingress PE, verify that routes from both the connected CE and remote PE are learned. If the expected route is not learned, check if the CE and remote PE are learning and advertising routes. In the example below, 20.2.0.0/24 is the route from the remote PE and 101.0.0.0/24 is the route from the directly connected CE:

```

PE1# show ip rib vrf vrf_1

Displaying ipv4 routes in RIB

Origin Codes: R - RIP, O - OSPFv2, B - BGP
               C - connected, S - static, L - local
Type Codes:   E - External BGP, I - Internal BGP
               IA - OSPF inter area, ia - OSPF intra area
               E1 - OSPF external type 1, E2 - OSPF external type 2
               EV - BGP EVPN, V - BGP VPN
* indicates selected for forwarding

VRF: vrf_1

Prefix          Nexthop          Interface          VRF(egress)  Origin/
Distance/      Age                                     Type            Metric
-----
*20.1.0.0/24    -                1/1/37            -             C             [0/0]
-
*20.1.0.2/32    -                1/1/37            -             L             [0/0]
-
*20.2.0.0/24    2.2.2.2          -                 -             B/V
[200/0]         00h:24m:27s
*101.0.0.0/24   20.1.0.1         -                 -             B/E           [20/0]
                00h:14m:53s
*201.0.0.0/24   2.2.2.2          -                 -             B/V
[200/0]         00h:14m:50s

Total Route Count : 5

```

```

PE1# show ip route vrf vrf_1

Displaying ipv4 routes selected for forwarding

```

```

Origin Codes: C - connected, S - static, L - local
               R - RIP, B - BGP, O - OSPF
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
               IA - OSPF internal area, E1 - OSPF external type 1
               E2 - OSPF external type 2

VRF: vrf_1

Prefix      Nexthop      Interface      VRF(egress)      Origin/
Distance/   Age                                     Type      Metric
-----
20.1.0.0/24      -              1/1/37          -              C          [0/0]
-
20.1.0.2/32      -              1/1/37          -              L          [0/0]
-
20.2.0.0/24      2.2.2.2       1/1/38         default        B/V       [200/0]
00h:26m:51s
101.0.0.0/24     20.1.0.1      1/1/37         -              B/E       [20/0]
00h:11m:42s
201.0.0.0/24     2.2.2.2        1/1/38          default        B/V       [200/0]
00h:11m:42s

Total Route Count : 5

```

Step 9: Check VPNv4 routes at egress PE for EBGp routes

Verify CE LAN routes appear in the output:

```

PE2# show bgp vpnv4 unicast
Status codes: s suppressed, d damped, h history, * valid, > best, = multipath,
               i internal, e external S Stale, R Removed, a additional-paths
Origin codes: i - IGP, e - EGP, ? - incomplete

VRF : default
Local Router-ID 2.2.2.2

      Network      Nexthop      Metric      LocPrf      Weight Path
Route Distinguisher: 1:1
*>i 20.1.0.0/24    1.1.1.1      0           100         0          ?
Route Distinguisher: 1:2
*> 20.2.0.0/24    0.0.0.0      0           100         0          ?
Route Distinguisher: 1:1
*>i 101.0.0.0/24   1.1.1.1      0           100         0          100 i
Route Distinguisher: 1:2
*> 201.0.0.0/24   0.0.0.0      0           100         0          100 i
Total number of entries 4

```

Step 10: Check VRF tables at egress PE for EBGp routes

Verify CE LAN routes appear in the output:

```
PE2# show ip rib vrf vrf_1
```

Displaying ipv4 routes in RIB

Origin Codes: R - RIP, O - OSPFv2, B - BGP

C - connected, S - static, L - local

Type Codes: E - External BGP, I - Internal BGP

IA - OSPF inter area, ia - OSPF intra area

E1 - OSPF external type 1, E2 - OSPF external type 2

EV - BGP EVPN, V - BGP VPN

* indicates selected for forwarding

VRF: vrf_1

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

*20.1.0.0/24 [200/0]	1.1.1.1 00h:23m:48s	-	-	B/V	
*20.2.0.0/24 -	-	1/1/26	-	C	[0/0]
*20.2.0.1/32 -	-	1/1/26	-	L	[0/0]
*101.0.0.0/24 [200/0]	1.1.1.1 00h:14m:14s	-	-	B/V	
*201.0.0.0/24 00h:14m:12s	20.2.0.2	-	-	B/E	[20/0]

Total Route Count : 5

```
PE2# show ip route vrf vrf_1
```

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local

R - RIP, B - BGP, O - OSPF

Type Codes: E - External BGP, I - Internal BGP, V - VPN, EV - EVPN

IA - OSPF internal area, E1 - OSPF external type 1

E2 - OSPF external type 2

VRF: vrf_1

Prefix Distance/ Age	Nexthop	Interface	VRF(egress)	Origin/ Type	Metric

20.1.0.0/24 [200/0]	1.1.1.1 00h:21m:20s	1/1/25	default	B/V	
20.2.0.0/24 [0/0]	-	1/1/26	-	C	
20.2.0.1/32 [0/0]	-	1/1/26	-	L	
101.0.0.0/24 [200/0]	1.1.1.1 00h:11m:46s	1/1/25	default	B/V	
201.0.0.0/24 [20/0]	20.2.0.2 00h:11m:44s	1/1/26	-	B/E	

Total Route Count : 5

Step 11: Check CE routing table

Check routes on CE and verify that remote CE routes have been learned. In the output below, 20.2.0.0/24 is the remote CE WAN subnet and 201.0.0.0/24 is the remote CE LAN subnet:

```
CE1# show ip route

Displaying ipv4 routes selected for forwarding

Origin Codes: C - connected, S - static, L - local
               R - RIP, B - BGP, O - OSPF
Type Codes:   E - External BGP, I - Internal BGP, V - VPN, EV - EVPN
               IA - OSPF internal area, E1 - OSPF external type 1
               E2 - OSPF external type 2

VRF: default

Prefix          Nexthop          Interface          VRF(egress)  Origin/
Distance/      Age                                     Type            Metric
-----
20.0.0.0/24      -              1/1/43             -             C
[0/0]            -
20.0.0.2/32      -              1/1/43             -             L
[0/0]            -
20.1.0.0/24      -              1/1/44             -             C
[0/0]            -
20.1.0.1/32      -              1/1/44             -             L
[0/0]            -
20.2.0.0/24      20.1.0.2      1/1/44            -             B/E
[20/0]          00h:13m:15s
101.0.0.0/24      20.0.0.1       1/1/43             -             B/I
[200/0]         00h:01m:10s
101.0.1.0/24      20.0.0.1       1/1/43             -             B/I
[200/0]         00h:01m:10s
101.0.2.0/24      20.0.0.1       1/1/43             -             B/I
[200/0]         00h:01m:10s
101.0.3.0/24      20.0.0.1       1/1/43             -             B/I
[200/0]         00h:01m:10s
101.0.4.0/24      20.0.0.1       1/1/43             -             B/I
[200/0]         00h:01m:12s
201.0.0.0/24      20.1.0.2      1/1/44            -             B/E
[20/0]          00h:01m:12s
201.0.1.0/24      20.1.0.2       1/1/44             -             B/E
[20/0]          00h:01m:12s
201.0.2.0/24      20.1.0.2       1/1/44             -             B/E
[20/0]          00h:01m:12s
201.0.3.0/24      20.1.0.2       1/1/44             -             B/E
[20/0]          00h:01m:12s
201.0.4.0/24      20.1.0.2       1/1/44             -             B/E
[20/0]          00h:01m:12s

Total Route Count : 15
```

Frequently asked questions

1. Can L2 subnets be extended across an MPLS L3 VPN network?

No, only L3 routing between CEs is supported across MPLS L3 VPN network. VXLAN can be used on CEs to provide L2 subnet stretching over the MPLS L3 VPN network.

2. Is multicast and IPv6 routing and supported across an MPLS L3 VPN network with 10.09?

No, 10.09 MPLS L3 VPN only supports IPv4 unicast routing. VXLAN can be used on CEs to provide multicast and IPv6 routing over the MPLS L3 VPN network.

3. Is VSX required on PEs for high availability?

VSX is not required on PEs as L3 routing across 2 standalone PEs (from a dual homed CE) provides PE redundancy.

4. How does the L3VPN solution enable site redundancy?

Site redundancy can be achieved using dual standalone PE devices connected to the site CE device that requires redundancy instead of using the PE devices in VSX mode. In order to ensure optimal best path selection, BGP configurations should be implemented as explained in the examples above with same RD configurations on both PE devices.

5. Are non-L3VPN forwarding deployments supported?

Non-L3VPN forwarding deployments are supported with static LSP. Please refer to the [lsp label imposition](#) command for configuration details. LDP/BGP need to be configured on devices as explained in the examples above for all L3VPN deployments.

6. Why is BGP peer establishment failing with a non-Aruba device as PE and Aruba device as P router?

It is important to make sure that explicit-null is correctly configured on the non-Aruba PE device for forwarding between the Aruba P device and non-Aruba PE device. The Aruba P device requires proper explicit-null configuration for LDP label distribution. This enables BGP session establishment through the MPLS core.

7. Why is BGP peer establishment causing intermittent flaps in the MPLS domain?

Make sure that all interfaces that are enabled for MPLS are also configured to support jumbo frames. If MPLS-enabled interfaces do not support jumbo frames it's possible that the BGP route exchanges could be bigger than the configured MTU. Configuring jumbo frame support across the MPLS domain will prevent any traffic interruptions due to BGP session flaps.

8. Are IP/ICMP Ping IP options and dual homing supported with MPLS?

Packets over MPLS with IP options will get dropped. Ping or traceroute over MPLS paths on a dual-home network will fail and packets would be dropped.

Support and Other Resources

Accessing Aruba Support

Aruba Support Services	https://www.arubanetworks.com/support-services/
AOS-CX Switch Software Documentation Portal	https://www.arubanetworks.com/techdocs/AOS-CX/help_portal/Content/home.htm
Aruba Support Portal	https://asp.arubanetworks.com/
North America telephone	1-800-943-4526 (US & Canada Toll-Free Number) +1-408-754-1200 (Primary - Toll Number) +1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working)
International telephone	https://www.arubanetworks.com/support-services/contact-support/

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

Other useful sites

Other websites that can be used to find information:

Airheads social forums and Knowledge Base	https://community.arubanetworks.com/
AOS-CX Switch Software Documentation Portal	https://www.arubanetworks.com/techdocs/AOS-CX/help_portal/Content/home.htm

Aruba Hardware Documentation and Translations Portal	https://www.arubanetworks.com/techdocs/hardware/DocumentationPortal/Content/home.htm
Aruba software	https://asp.arubanetworks.com/downloads
Software licensing	https://lms.arubanetworks.com/
End-of-Life information	https://www.arubanetworks.com/support-services/end-of-life/
Aruba Developer Hub	https://developer.arubanetworks.com/

Accessing Updates

You can access updates from the Aruba Support Portal or the HPE My Networking Website.

Aruba Support Portal

<https://asp.arubanetworks.com/downloads>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found:

My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>

Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

Warranty Information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

Regulatory Information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

Documentation Feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback-switching@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.