

## 1. Description


### 1.1. Project

Project Name	lcd1in3-demo
Board Name	lcd1in3-demo
Generated with:	STM32CubeMX 4.22.1
Date	11/27/2018

### 1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103RBTx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

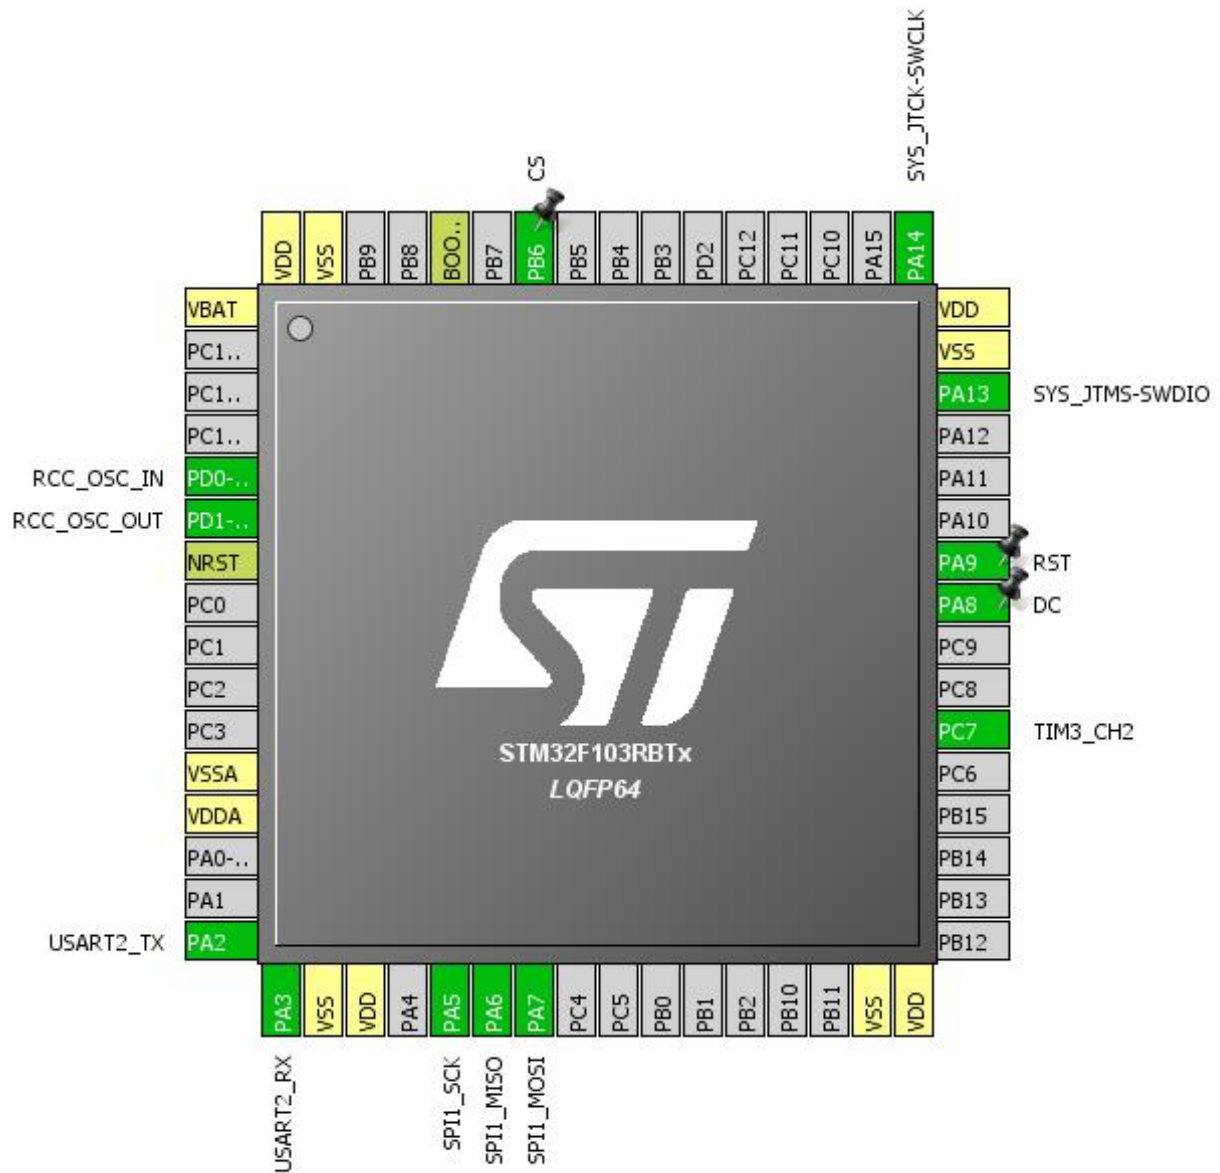


### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O	SPI1_SCK	
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
31	VSS	Power		
32	VDD	Power		
38	PC7	I/O	TIM3_CH2	
41	PA8 *	I/O	GPIO_Output	DC
42	PA9 *	I/O	GPIO_Output	RST
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
58	PB6 *	I/O	GPIO_Output	CS
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

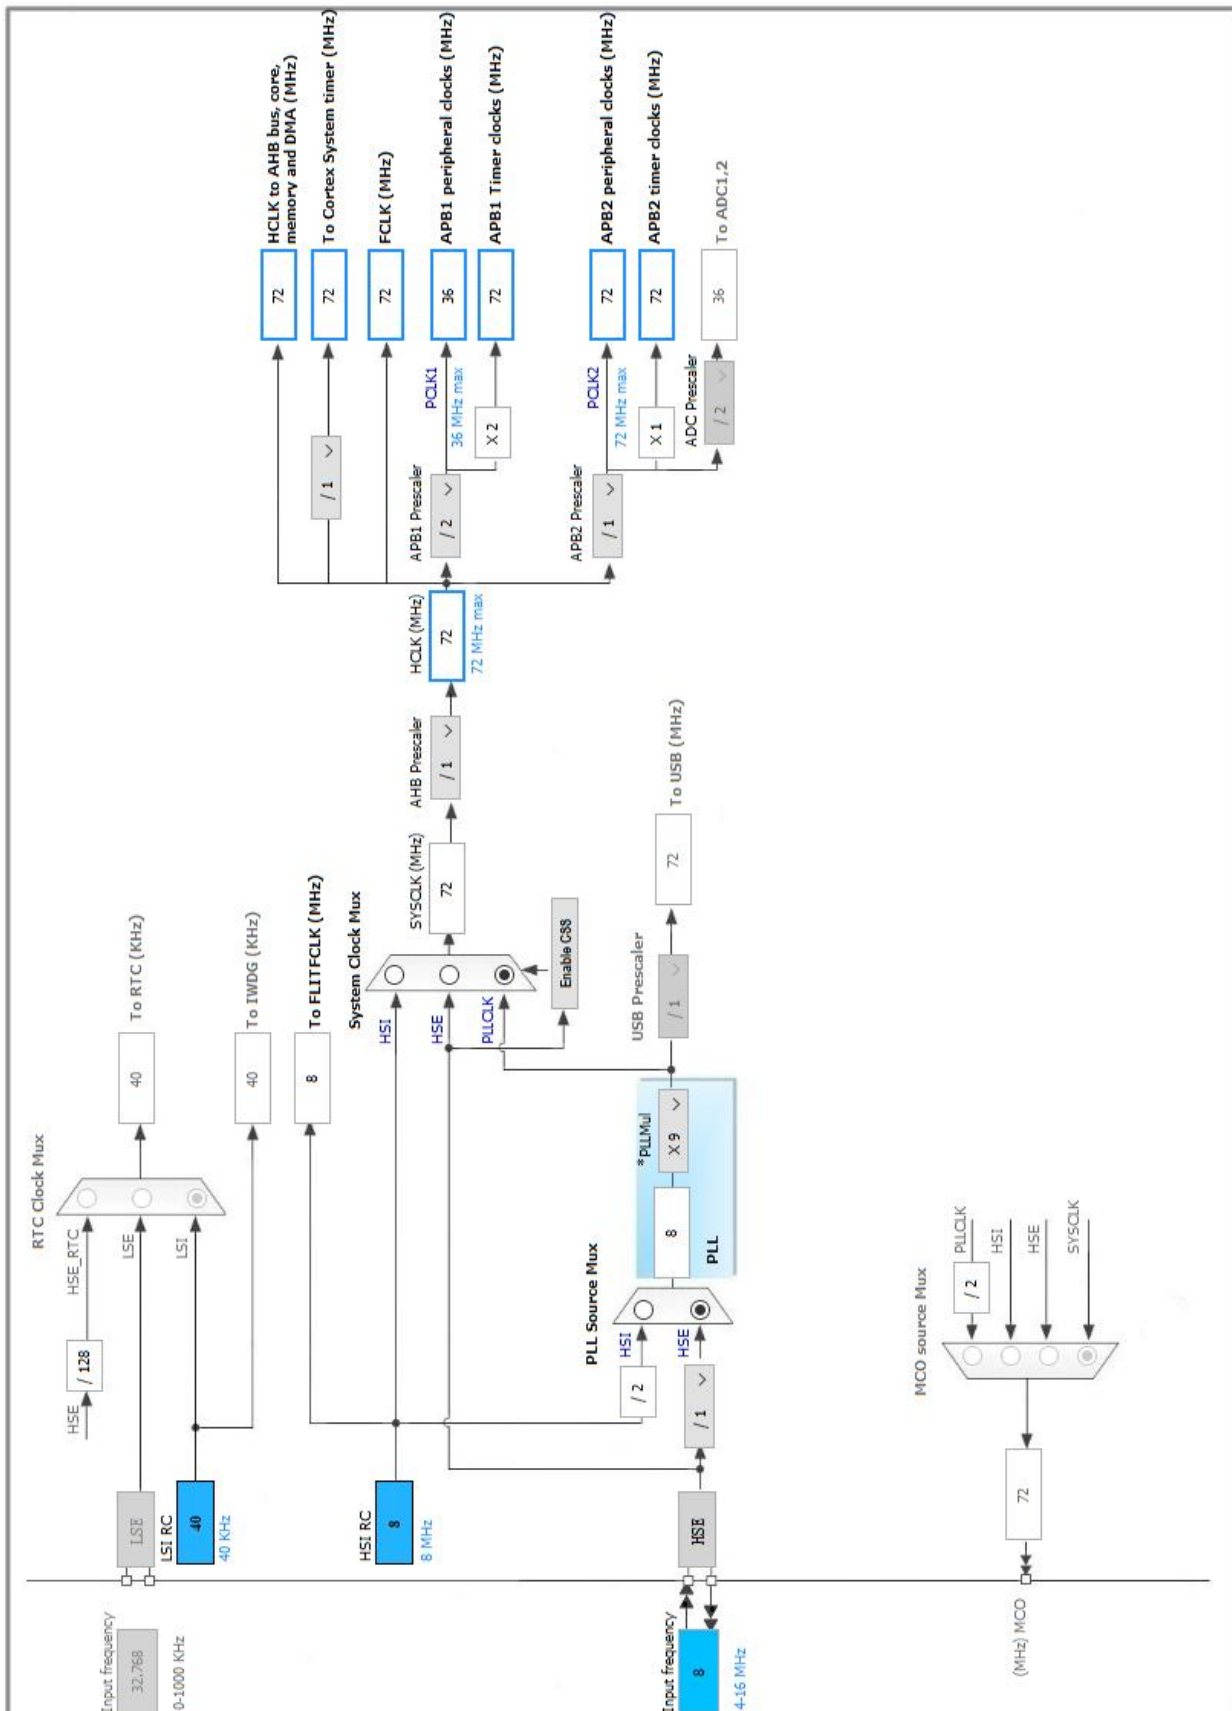

## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### 5.2. SPI1

#### Mode: Full-Duplex Master

##### 5.2.1. Parameter Settings:

###### Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

###### Clock Parameters:

Prescaler (for Baud Rate)	<b>4 *</b>
Baud Rate	<b>18.0 MBits/s *</b>
Clock Polarity (CPOL)	<b>High *</b>
Clock Phase (CPHA)	<b>2 Edge *</b>

###### Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

## 5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

## 5.4. TIM3

Channel2: PWM Generation CH2

### 5.4.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	300-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	1000-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Enable *

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

#### PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

## 5.5. USART2

Mode: Asynchronous

### 5.5.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction  
Over Sampling

Receive and Transmit  
16 Samples

**\* User modified value**

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	High *	
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	n/a	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM3	PC7	TIM3_CH2	Alternate Function Push Pull	n/a	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	High *	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PA8	GPIO_Output	Output Push Pull	n/a	Low	DC
	PA9	GPIO_Output	Output Push Pull	n/a	Low	RST
	PB6	GPIO_Output	Output Push Pull	n/a	Low	CS

### 6.2. DMA configuration

nothing configured in DMA service



### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM3 global interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103RBTx
Datasheet	13587_Rev17

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	lcd1in3-demo
Project Folder	E:\Project\1.3inch LCD Module\code\STM32\STM32F103RBT6
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No