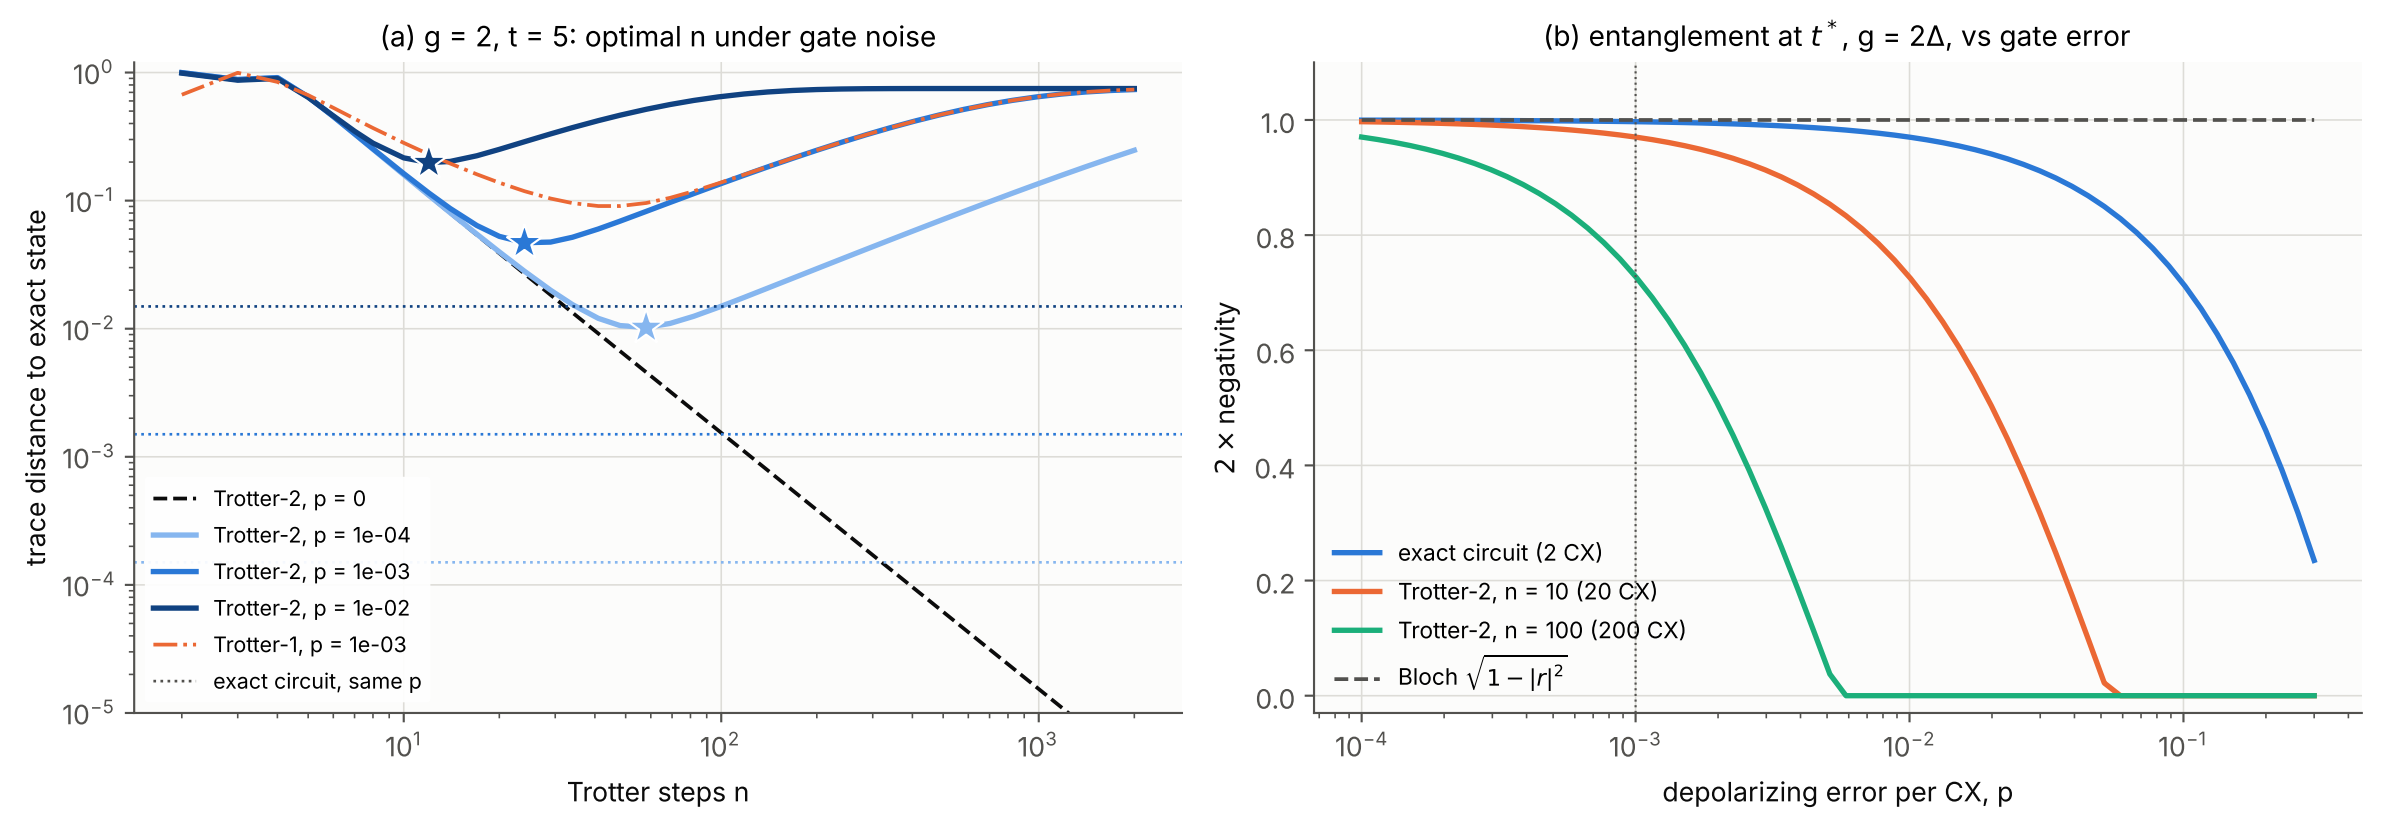
(a) g = 2, t = 5: optimal n under gate noise
trace distance to exact state
Trotter steps n
Trotter-2, p = 0
Trotter-2, p = 1e-04
Trotter-2, p = 1e-03
Trotter-2, p = 1e-02
Trotter-1, p = 1e-03
exact circuit, same p
(b) entanglement at t^*, g = 2Δ, vs gate error
2 × negativity
depolarizing error per CX, p
exact circuit (2 CX)
Trotter-2, n = 10 (20 CX)
Trotter-2, n = 100 (200 CX)
Bloch $\sqrt{1-|r|^2}$