


0.1 - First Draft  
0.1b - Fixed ISO TX/RX connections  
0.1c - Final release - fixed Q200 foot print

DIRECTORY:

1	-	Notes
2	-	MCU
3	-	IO

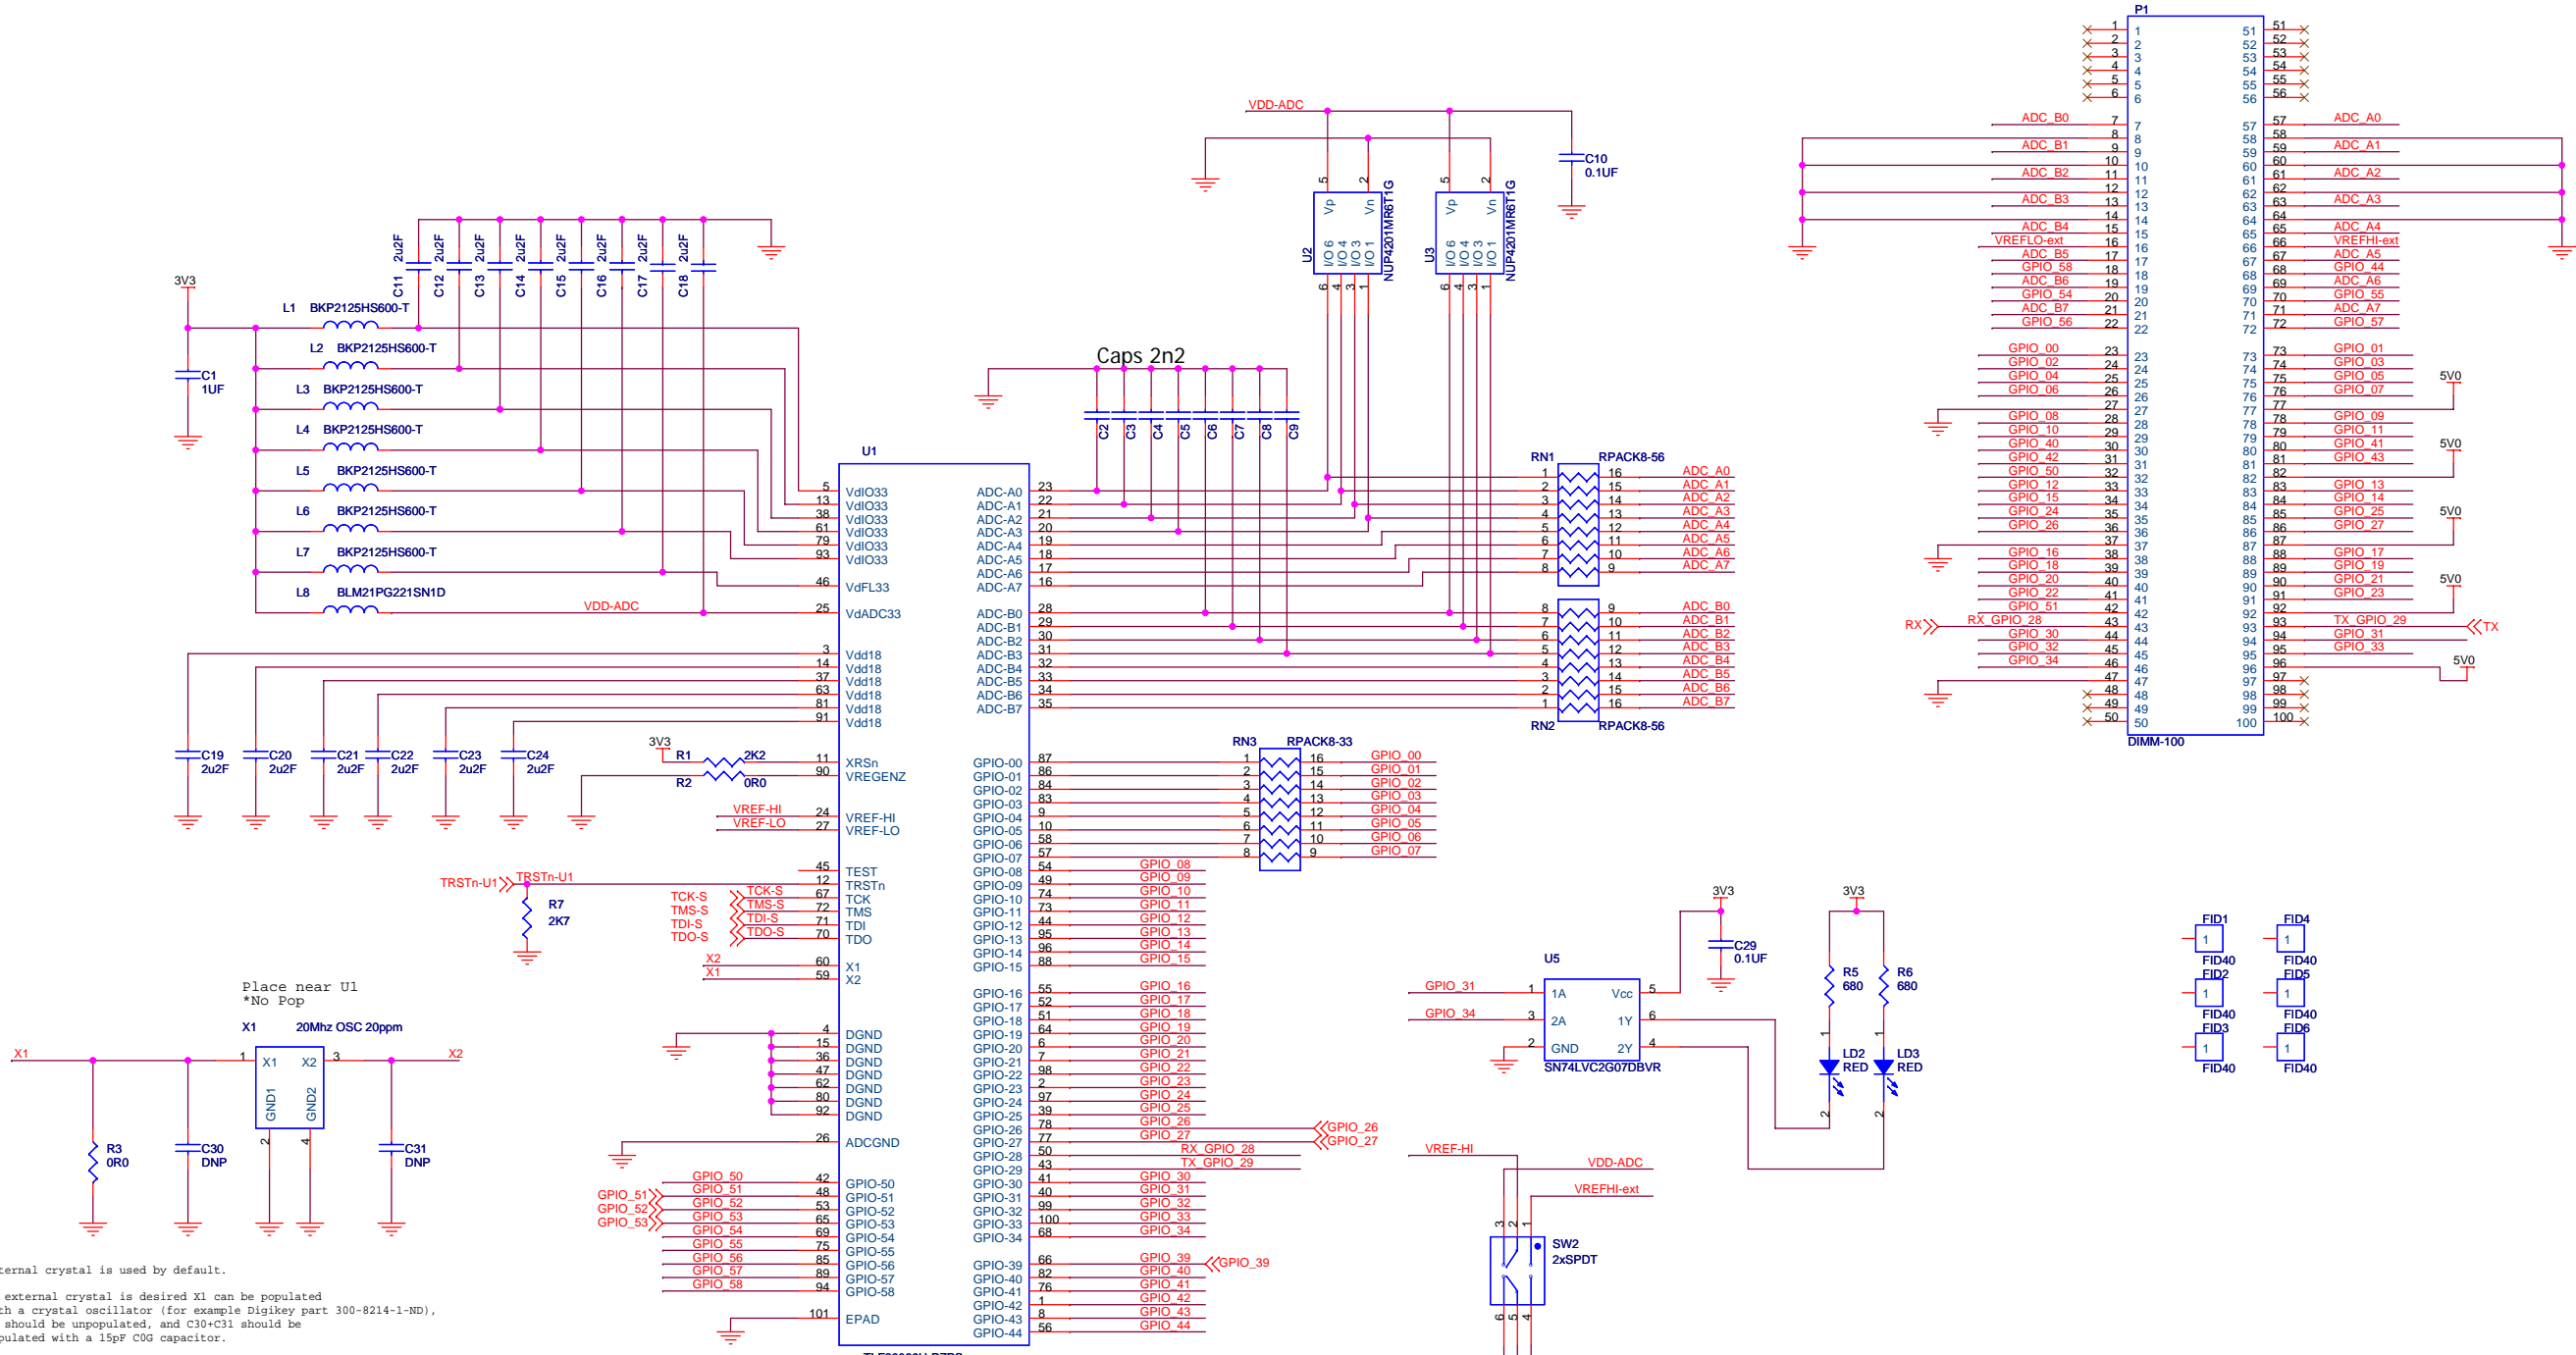

Internal crystal is used by default.  
If external crystal is desired X1 can be populated with a crystal oscillator (for example Digkey part 300-8214-1-ND), R3 should be unpopulated, and C30+C31 should be populated with a 15pF C0G capacitor.

