



Department of Physics and Technology

Master Thesis

---

**Interface Design for the  
Gigabit Transceiver Common Readout Unit**

---

Anders Østevik

June 2016

Introduction

PCB Design

GBT Control Software

Testing and Verification

Conclusion

oooooo

oooooo

ooooooo

ooooo

oo

# Overview

## Introduction

LHC Upgrade

Gigabit Transceiver System

Primary Objectives

## PCB Design

Design Discussion

Transmission Lines

Design Parameters

## GBT Control Software

Hardware

Software

## Testing and Verification

Hardware

Software

## Conclusion



●ooooo

oooooo


ooooooo

ooooo

oo


# LHC Upgrade

- Large Hadron Collider (LHC)
  - Particle accelerator
  - 27 km circular tunnel
  - 13 TeV
- High-Luminosity LHC
  - 10x beam luminosity
  - Increase in radiation and amount of data
  - → Gigabit Transceiver

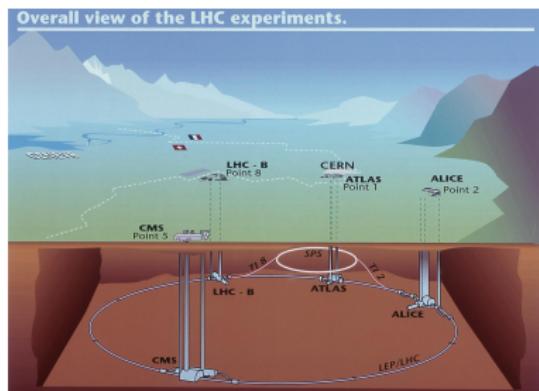

# Gigabit Transceiver System

- On-detector - Custom ASICs
  - GBTx, GBT-SCA, VTTx/VTRx
  - E-links
- Off-detector - Control room
  - CRU (FPGA)
  - > 4.8 Gbit/s transceivers
  - GBT-FPGA
- Optical communication
  - Timing and Trigger Control (TTC)
  - Data Acquisition (DAQ)
  - Slow Control (SC)

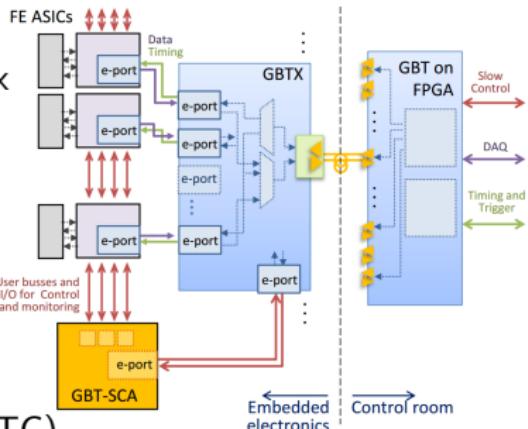

○○●○○○

○○○○○○


○○○○○○○

○○○○○

○○


# Gigabit Transceiver System

- Encoding modes
  - GBT-Frame
  - 8B/10B
  - Wide-Bus

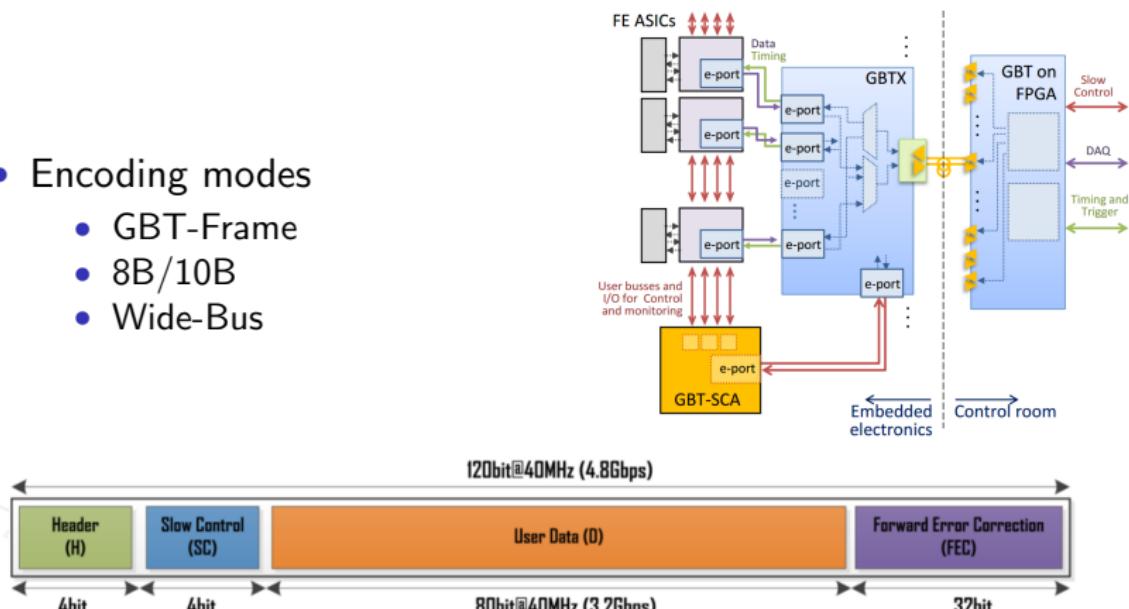


# GBT-FPGA

- Firmware library for Altera/Xilinx FPGAs
- GBT Link
  - "Standard", "Latency-Optimized"
  - GBT Rx, GBT Tx, GBT MGT
- GBT-example Design

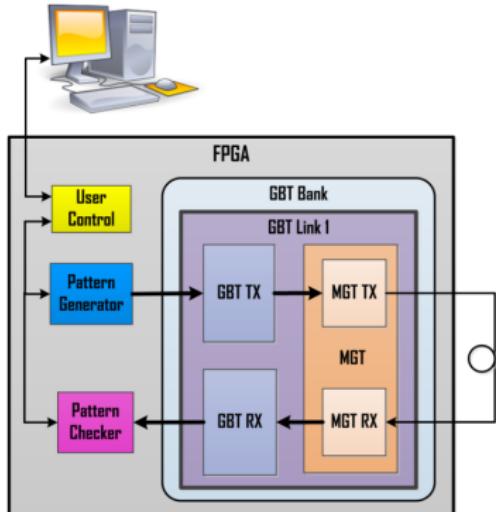

# Versatile Link Demo Board

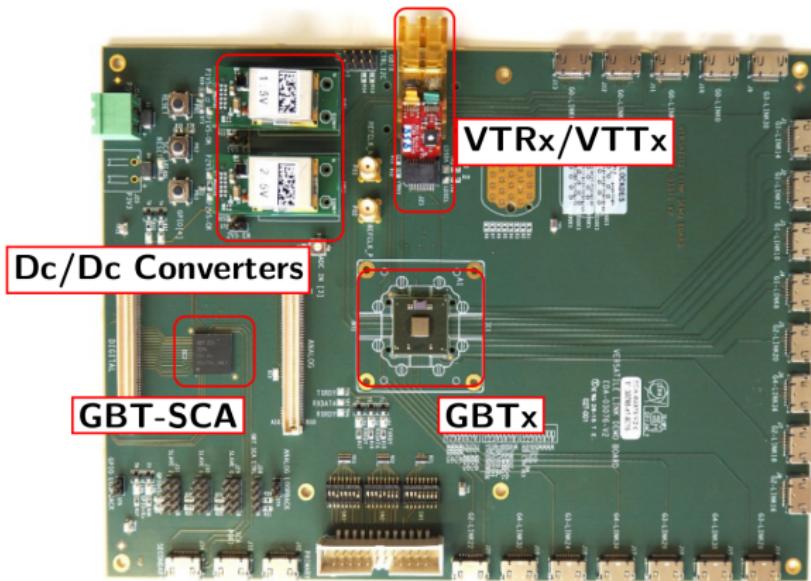

oooooo•

oooooo

ooooooo

ooooo

oo

# Primary Objective

- Software Design
  - Serial communication between PC and CRU
  - Interface allowing control over CRU
- PCB Design
  - Connection between CRU and VLDB



oooooo


●ooooo

ooooooo

ooooo

oo

# PCB Design

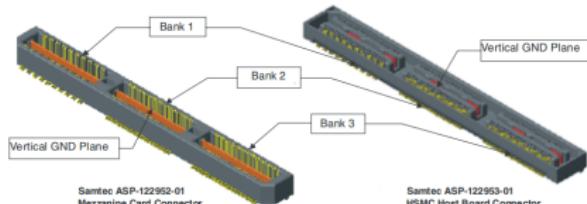

## Specifications:

- Connect to CRU using HSMC-connector
- E-links → 320 Mbit/s detector data → LVDS
- Optical-Fiber → 4.8 Gbit/s GBT data → PCML



oooooo


o•oooo

ooooooo

ooooo

oo

# PCB Design

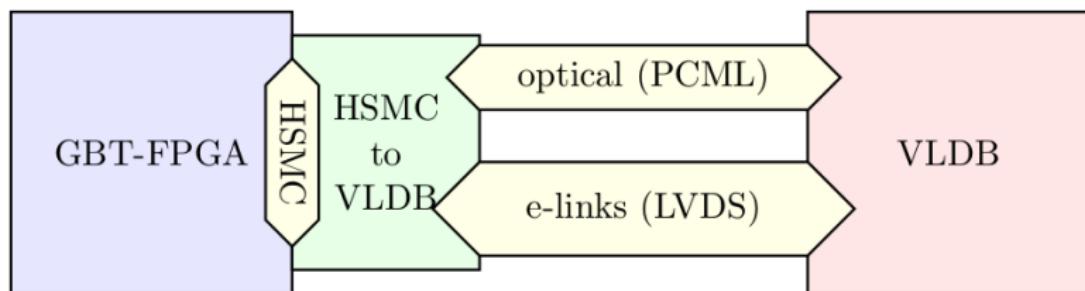

oooooo

oo•ooo

ooooooo

ooooo

oo


# Transmission Lines

$$v = \frac{c}{\sqrt{\epsilon_r}}, \quad \epsilon_r \approx 4$$

- $v = 15 \text{ cm/ns}$
- 4.8 Gbit/s (0.2 ns) → transmission line if trace < 3.1 cm
- Characteristic impedance,  $Z_0 = 50$
- Differential impedance,  $Z_{diff} = 100$

Figure 5-17: Differential Input OCT

The Cyclone V devices support OCT for differential LVDS and SLVS input buffers with a nominal resistance value of 100  $\Omega$ , as shown in this figure.

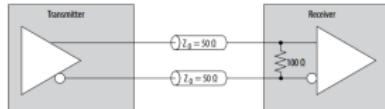

oooooo

oooo●oo

ooooooo


ooooo

oo


# Transmission Lines

$$Z_0 = \frac{60}{\sqrt{0.475\epsilon_r + 0.67}} \times \ln \frac{4h}{0.67(0.8w + t)}$$

$$Z_{diff} = 2 \times Z_0 [1 - 0.48e^{(-0.96 \times \frac{s}{h})}]$$

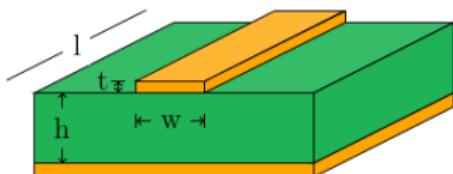

(a) Single-ended.

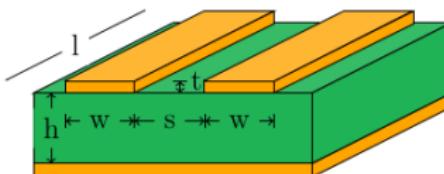

(b) Differential.



oooooo

oooo●o

ooooooo


ooooo

oo

# Design Parameters

- Routing differential signals:
  - Equal trace lengths on each pair
  - As close as possible, but keep distance to other pairs
  - As straight paths as possible

	Layer	Type	t [μm]	$\epsilon_r$	w [μm]	$Z_0[\Omega]$	Spacing [μm]	$Z_{diff}[\Omega]$
1	Surface	Air		1				
2	Top	Conductor	18		100	51.3	300	102
3		Dielectric	65	4.05				
4	Voltage	Plane	35					
5		Dielectric	1400	4.05				
6	Gnd	Plane	35					
7		Dielectric	65	4.05				
8	Bottom	Conductor	18		100	51.3	300	102
9	Surface	Air		1				



oooooo

ooooo●

ooooooo

ooooo

oo

# Result



- Each HDMI has an input pair and an output pair
- J4 has an additional pair for input clock from VLDB



oooooo

oooooo

●oooooo


ooooo

oo

# GBT Control Software

## Specifications:

- Provide communication between PC and FPGA
- Read and write GBT control signal information
- Provide a simple User Interface

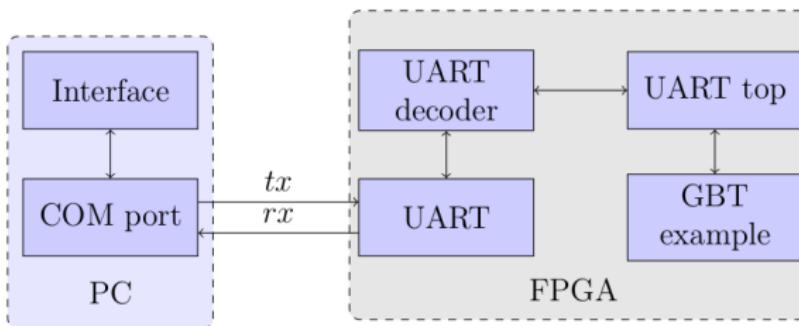

	Switches	Probes
GBT register	0x00...0x23	0x24...0x41



oooooo

oooooo

○●ooooo

ooooo

oo

# Hardware

- Treat incoming requests sent from PC
- Components:
  - Treat requests sent from PC
  - UART (RX, TX, Buffers, baudrate generator)
  - Decoder
- Goal: implement into GBT Example Design



oooooo

oooooo


○○●○○○

ooooo

○○

# UART

- Synchronisation → Oversampling
- $16 \times \text{baudrate}$
- Stores bytes in FIFO-buffers
- $19200 - 8 - N - 1 \rightarrow 307200$  sample clock

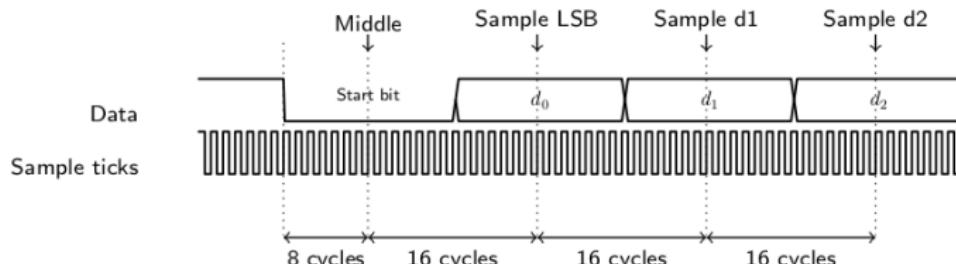

oooooo

oooooo


oooo●ooo

ooooo

oo

# Decoder

- Requests:
  - read → 0xDD
  - write 0 → 0xEE
  - write 1 → 0xFF
- Legal addresses:
  - 0x00 → 0x41
- Bytes sent to PC:
  - 0x00 → 0xC1

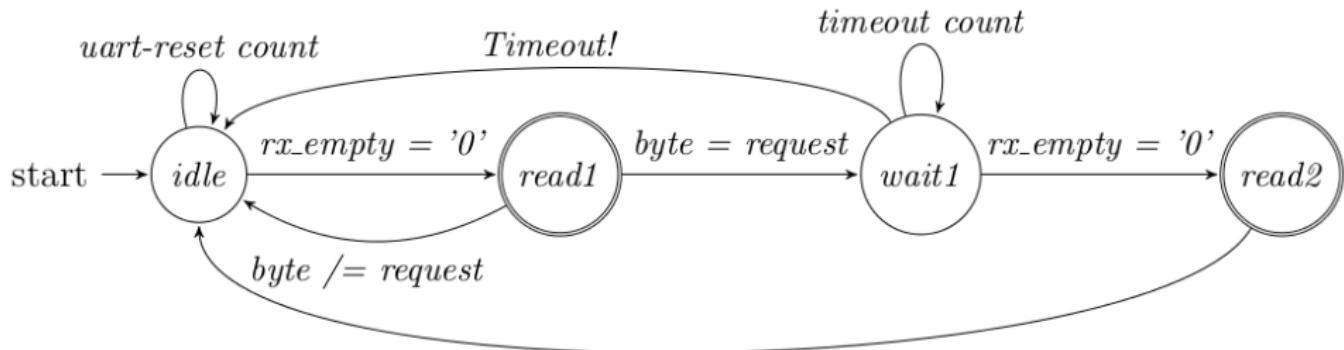

oooooo

oooooo

oooo●oo

ooooo

oo

# Software

## Modules:

- Send/Receive
  - RS-232 library
  - Continuously transmits pattern to GBT-registers
  - Reads it back for transmit confirmation
- User Interface
  - ncurses library
  - User commands: write, read, status, open, close, exit
  - Dummy registers instead of real GBT-registers
- GBT register data → stored and maintained using a custom *Signals*-library



oooooo

oooooo


oooooo●○

ooooo

oo

## Transmit/Receive Module

- Transmit 2 bytes, receive 1 byte
- 2D-array with "patterns"
- COM-port

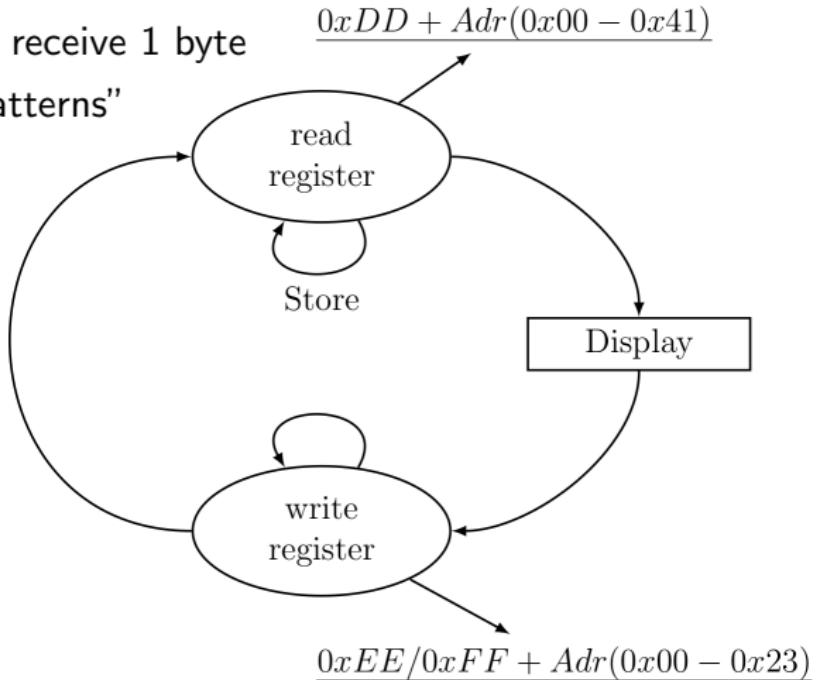

ooooooo

ooooooo

oooooooo●

oooooo

# User Interface

Command History:-

```
:status
usage: status [settings/comport]
:s
status  [settings/comport]
exit   [status (1 or 0)]
:a
read   [[name0] [name1] ...]
write  [data [name1] [name2] ...]
status  [settings/comport]
exit   [status (1 or 0)]
:r
read   [[name0] [name1] ...]
write  [data [name1] [name2] ...]
status  [settings/comport]
open   [comport]
close  [comport]
exit   [status (1 or 0)]
:e
read   [[name0] [name1] ...]
write  [data [name1] [name2] ...]
status  [settings/comport]
open   [comport]
close  [comport]
exit   [status (1 or 0)]
:status settings
Current settings:
Baud Rate -> 57600
COMport nr.-> 4 (see rs232.c)
COMport node -> 8N1

:status comport
COMport status -> closed
```

Signals:-

Index:	Name:	Data:
S00	LOOPBACK ('0' -> NORMAL   '1' -> LOOPBACK)	0
S01	GENERAL RESET	0
S02	MGT TX PLL RESET	0
S03	TX RESET	0
S04	RX RESET	0
S05	PATTERN SELECT ('1' -> COUNTER   '2' -> STATIC)	1
S06	PATTERN SELECT ('1' -> COUNTER   '2' -> STATIC)	0
S07	TX HEADER SELECTOR ('0' -> IDLE   '1' -> DATA)	1
S08	RESET DATA EXTRA DATA ERROR SEEN FLAGS	0
S09	RESET RX GBT READY LOST FLAG	0
S10	TX_FRAMECLK PHASE ALIGNER - MANUAL RESET	0
S11	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S12	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S13	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S14	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S15	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S16	TX_FRAMECLK PHASE ALIGNER - GBT LINK 1 STEPS	0
S17	TX_FRAMECLK PHASE ALIGNER - ENABLE	0
S18	TX_FRAMECLK PHASE ALIGNER - TRIGGER	0
S19	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S20	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S21	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S22	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S23	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S24	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S25	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S26	TX_WORLDCLOCK MONITORING - THRESHOLD UP	0
S27	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S28	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S29	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S30	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S31	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S32	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S33	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S34	TX_WORLDCLOCK MONITORING - THRESHOLD LOW	0
S35	TX_WORLDCLOCK MONITORING - TX RESET ENABLE	0

Commandline:-

-



oooooo

oooooo

ooooooo

●oooo

oo

## Testing and Verification

- External Loop-back Tests: HDMI and Optical-Fiber
- 




oooooo

oooooo

ooooooo

○●○○○

# Setup

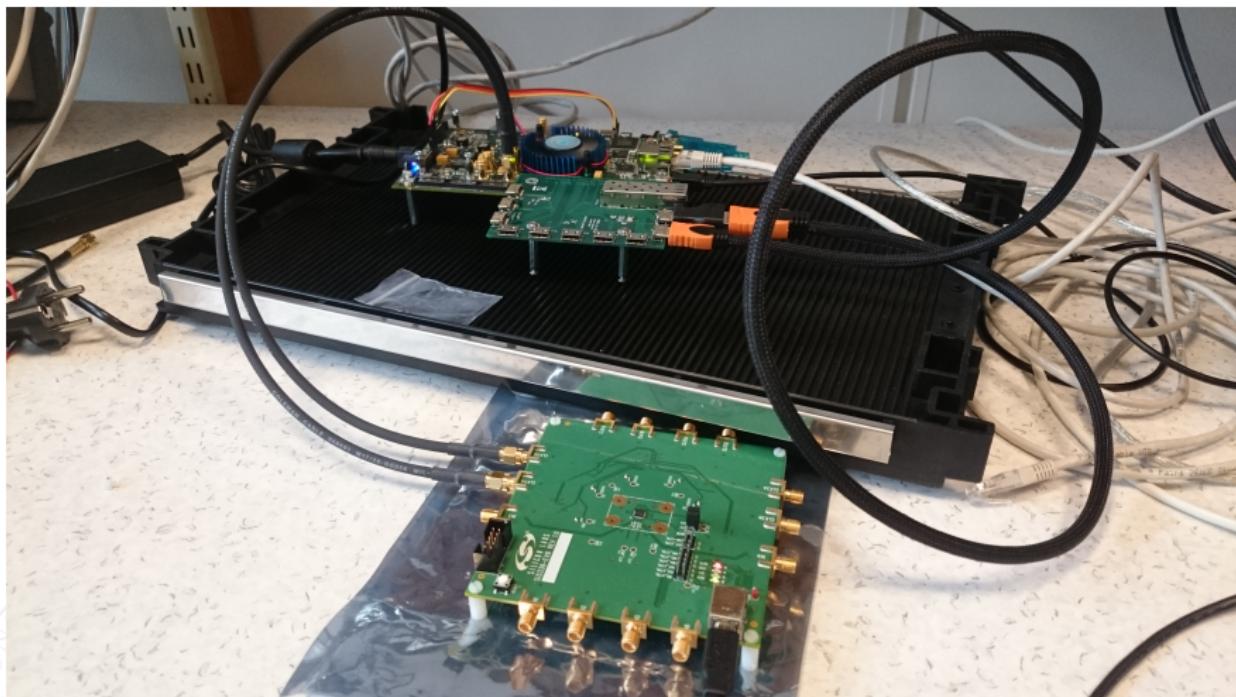

oooooo


oooooo

ooooooo

○○●○○

○○


# Setup

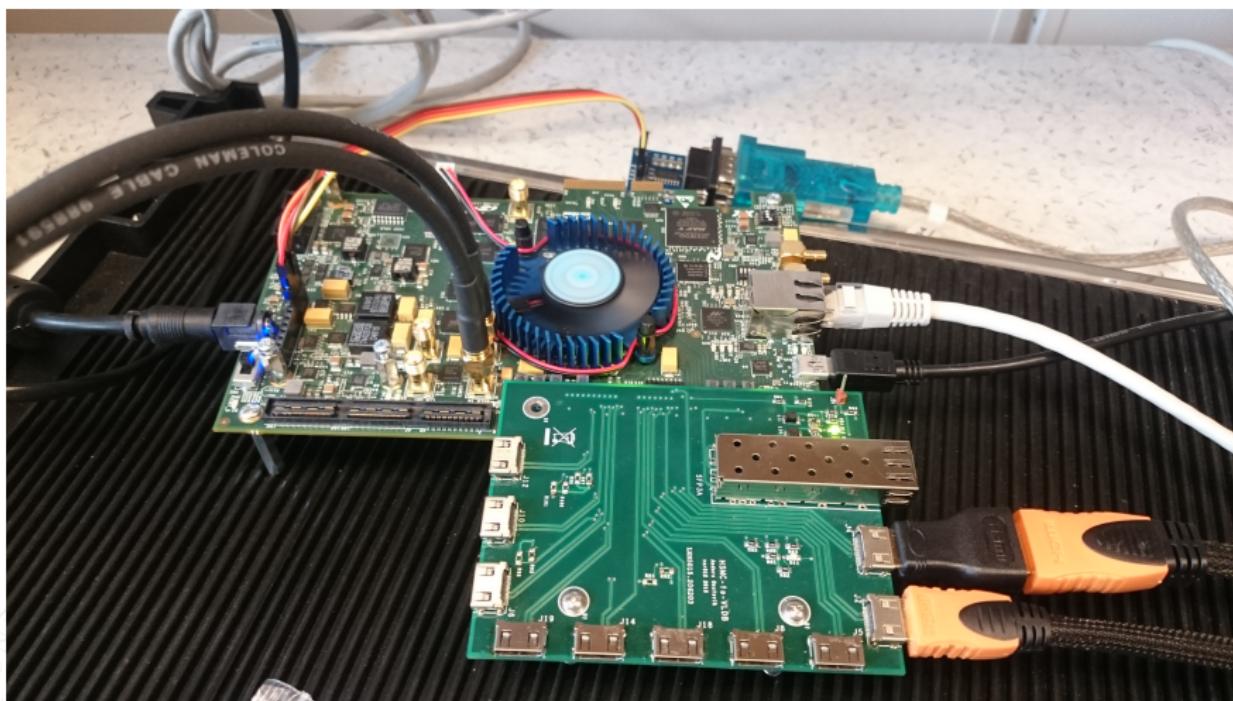

## External Loop-back Test

Optical Fiber Connector (PCML):


- GBT example Design
- 4.8 Gbit/s *counter*
- SignalTap II → sample TX and RX

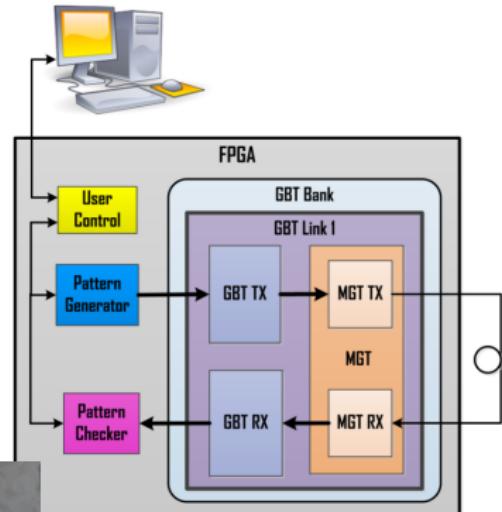

## External Loop-back Test

### HDMI connector (LVDS):

- Purpose: Transmission of 320 Mbit/s E-link detector data
- Test: Loop-back a 300 MHz Pseudo-random counter
- Measure:
  - bit-error count
  - eye-diagram
  - crosstalk
  - reflections

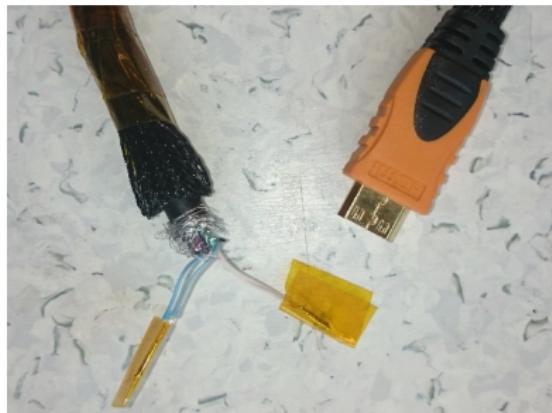

oooooo

oooooo

ooooooo

ooooo

●○

## Conclusion

- PCB:
  - Optical Fiber module **works** → 4.8 Gbit/s external loopback
  - HDMI LVDS connectors **needs more testing** → eye-diagram, crosstalk, reflections, bit-error count.
- Hardware:
  - UART + Decoder **works**
  - Implementation into the GBT Example Design remains
- Software:
  - Send/Receive and User Interface modules **works**
  - Both needs to be merged
- Final test of the whole system:
  - GBT example + Hardware + Software + PCB-loopback
  - Test system together with VLDB



Introduction

PCB Design

GBT Control Software

Testing and Verification

Conclusion

oooooo

oooooo

ooooooo

ooooo

○●

# Thank you!

