


Angle sensor (Hall)

91681




Connector

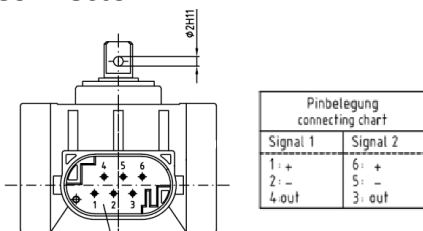



- AMP-Kupplung/female connector
AMP-Nr. 114-18063-21/Kodierung A
- MQS-Gegenstecker/connector housing
AMP-Nr. 1-967616-1
- Steckerkontakt/terminals
AMP-Nr. 0-096 3727-2
- Blindstopfen/blind plug
AMP-Nr. 0-096 7056-1
- Einzelleiterabdichtung/core seal
AMP-Nr. 0-096 7067-1

Dimensions

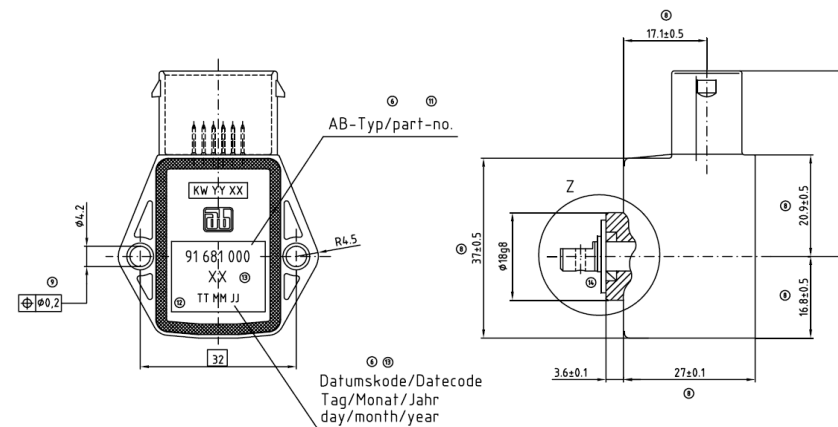

Supply Current	5 V ± 0.25 V 6 mA max. per signal	Temperature range	- 40 °C to + 120 °C
Output signal	Voltage interface, 2 signal	Sealing grade	Protection class according to DIN 40050-9 housing IP6K6 connector IP6K9K
Terminals Sensor	Gold plated	Vibration	Robust against higher requirements
Specification	DHWS670671-6a	Drawing	91681000 Index 14

Angle range (degrees)

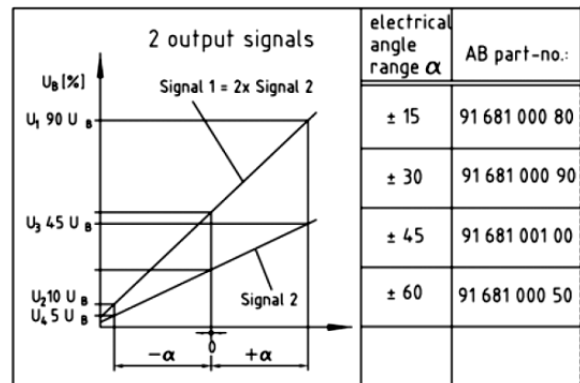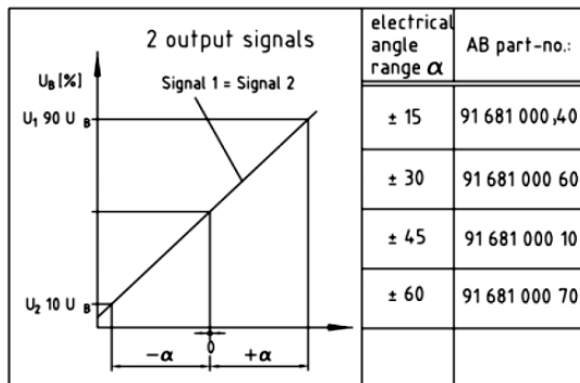

General Note

TT Electronics reserves the right to make changes in product specifications without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.