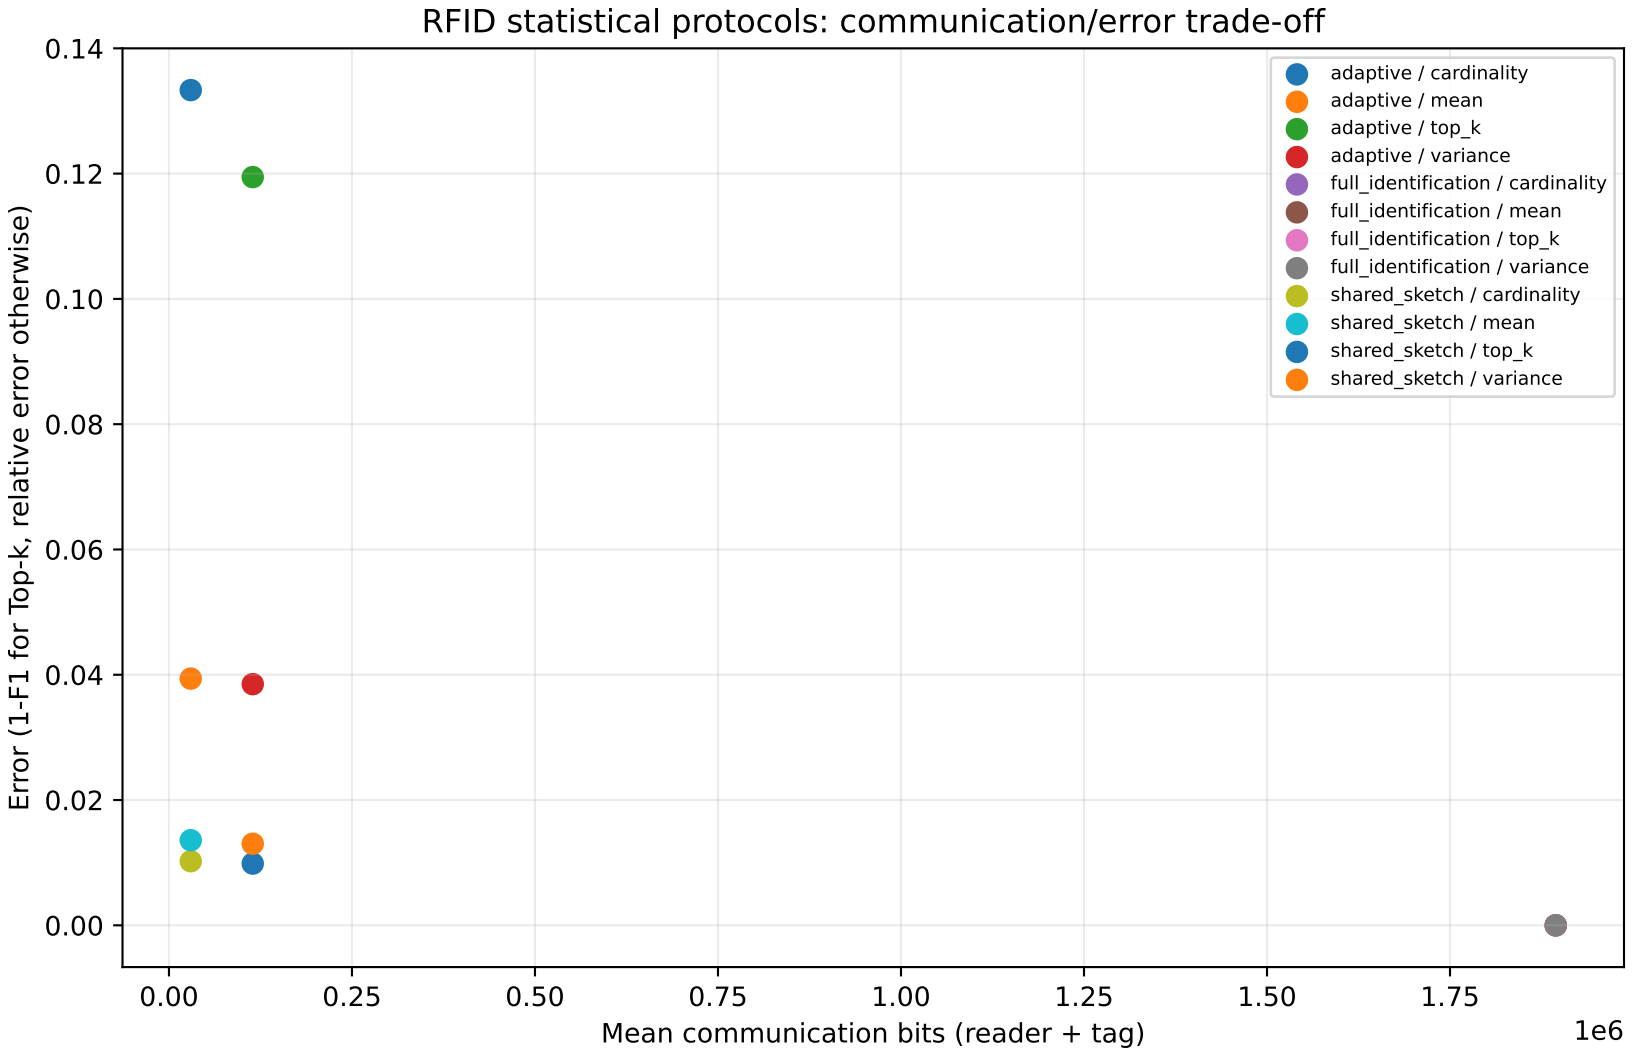
RFID statistical protocols: communication/error trade-off
Error (1-F1 for Top-k, relative error otherwise)
Mean communication bits (reader + tag)
1e6
0.14
0.12
0.10
0.08
0.06
0.04
0.02
0.00
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
adaptive / cardinality
adaptive / mean
adaptive / top_k
adaptive / variance
full_identification / cardinality
full_identification / mean
full_identification / top_k
full_identification / variance
shared_sketch / cardinality
shared_sketch / mean
shared_sketch / top_k
shared_sketch / variance