




POWER INPUT: 12 V in, fuse, reverse polarity, TVS, 5 V regulator, VIN sense

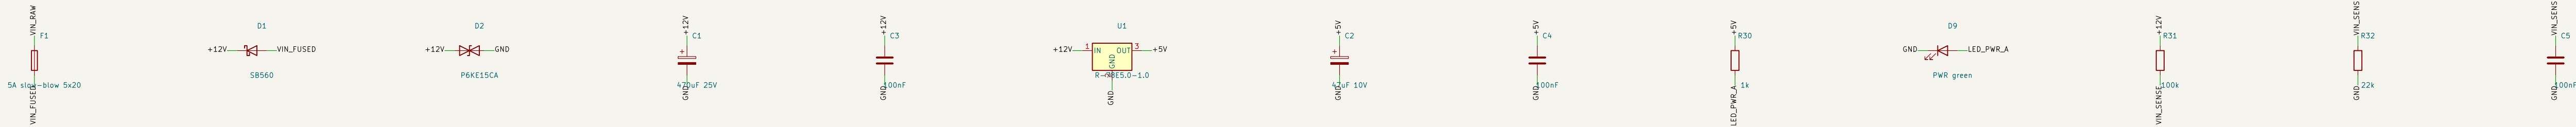


ESP32-DevKitC-32E SOCKETS (fit J21 OR J22)

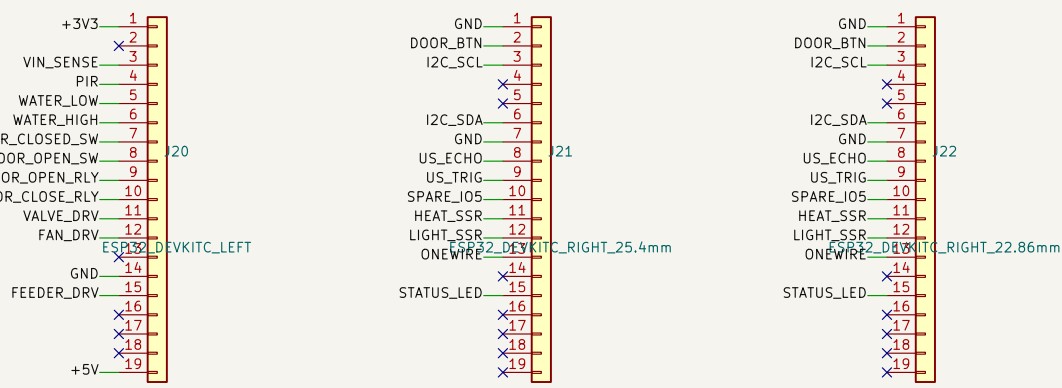

POP DOOR ACTUATOR: 2-relay H-bridge (K1 open / K2 close)

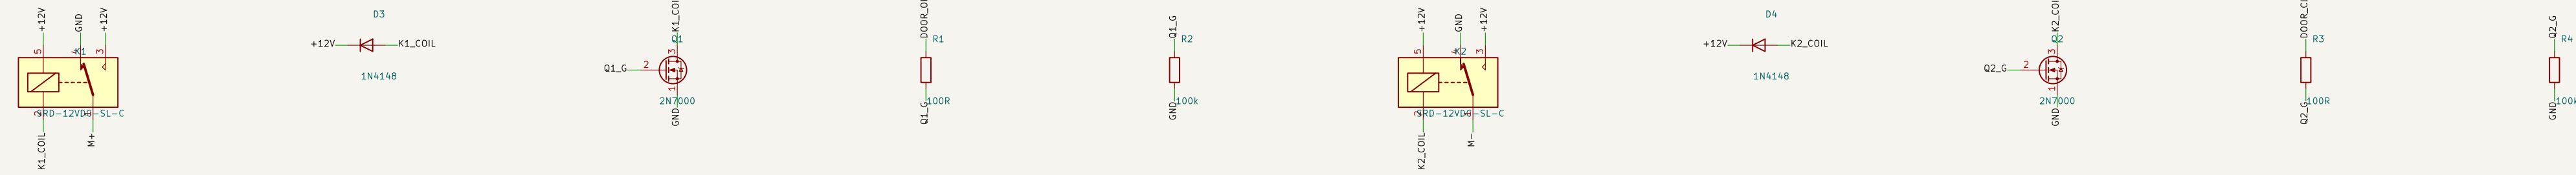


12 V LOW-SIDE OUTPUTS: valve, feeder, fan, SSR drivers

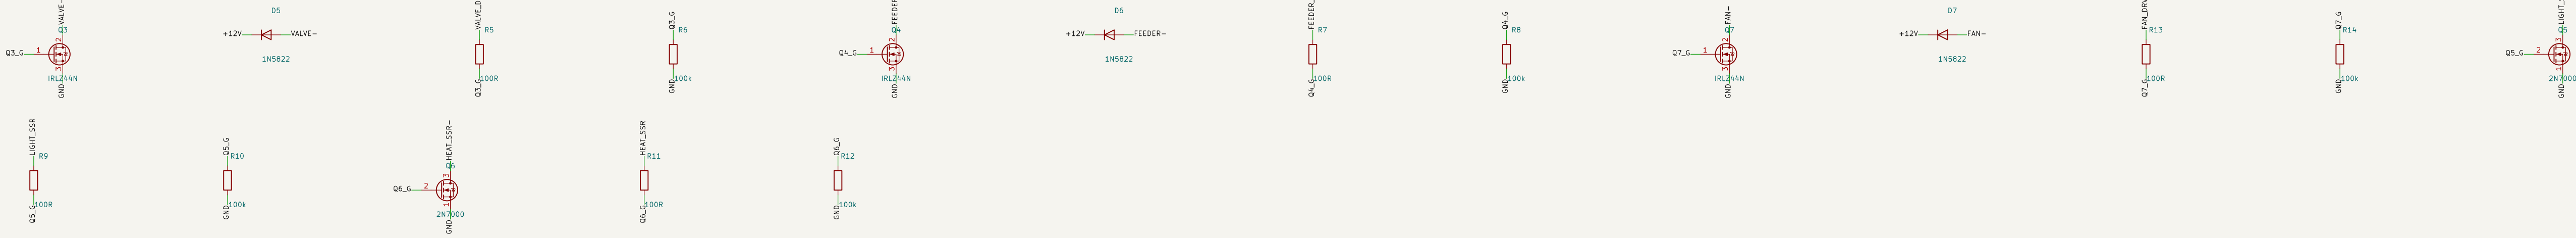


INPUT CONDITIONING: pull-ups, RC filters, echo divider



FIELD CONNECTORS

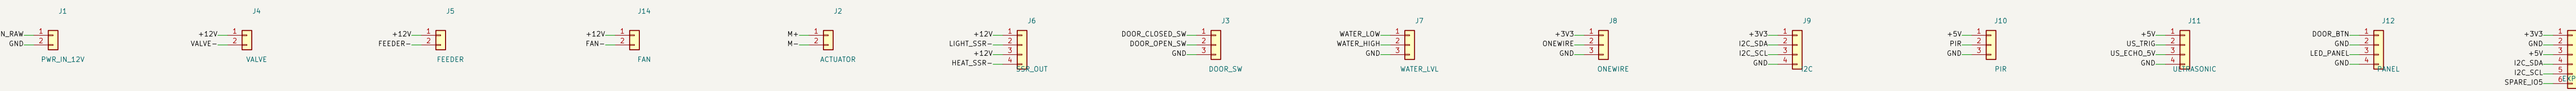

MECHANICAL

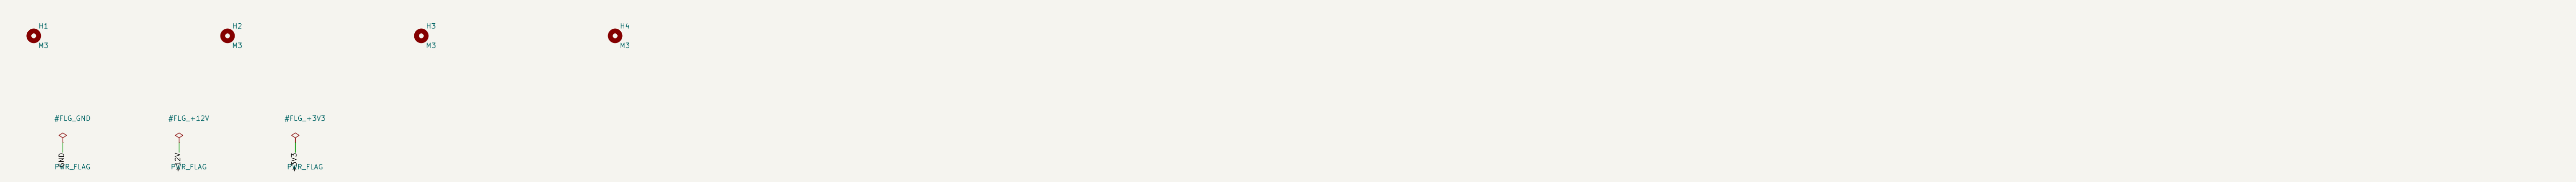

Low voltage (12 V DC) only. Mains/SSRs live in a separate enclosure.
Generated by pcb/gen_schematic.py from pcb/design.py -- do not hand-edit

Sheet: /
File: coop-controller.kicad_sch

Title: Coop Controller

Size: A1 Date: Rev: 1.0
Kicad E.D.A. 10.0.6 10/1/1