



HC51/U Crystal

BC11 – 19.56 x 18.85 x 8.59mm

HC-51/U crystals are available from 100.000 kHz to 10.000 MHz. A very rugged crystal used in applications where there are higher vibrations: Aeronautical Instruments, Security and Test Equipment.

Features:

- Frequency range of 100.000 kHz to 10.000 MHz
- High Precision and High Reliability
- Avionics, Security, Microprocessor, Computer and Computer peripheral applications
- All Products meet the European Union Initiative (RoHS) for Lead (Pb) free content and requirements for re-flow profiling using lead-free solder.

Specifications:

Frequency Range	100.000 kHz – 10.000 MHz
Frequency Tolerance @ 25°C.	±30ppm – Standard
Frequency Stability	±50ppm – Standard
Operating Temperature Range	-20° to +70°C. – Standard
Load Capacitance	10pF to 100pF or Series Resonant
Shunt Capacitance	7pF max.
Equivalent Series Resistance	See chart below
Aging	±3ppm/ 1 st year max.
Drive Level	1.0mW max.
Storage Temperature	-55° to +125°C.


PO BOX 10, MIDDLESEX, NEW JERSEY 08846-0010 TEL. 732-356-7787

www.bomarcystal.com sales@bomarcystal.com



Equivalent Series Resistance:

Frequency (MHz)	Mode	ESR (ohms) max.
100.000 – 999.000 kHz	Fundamental	1500 – 2000
1.000 – 1.500	Fundamental	500
1.501 – 2.000	Fundamental	400
2.001 – 3.000	Fundamental	300
3.001 – 4.000	Fundamental	150
4.001 – 6.000	Fundamental	75
6.001 – 10.000	Fundamental	60

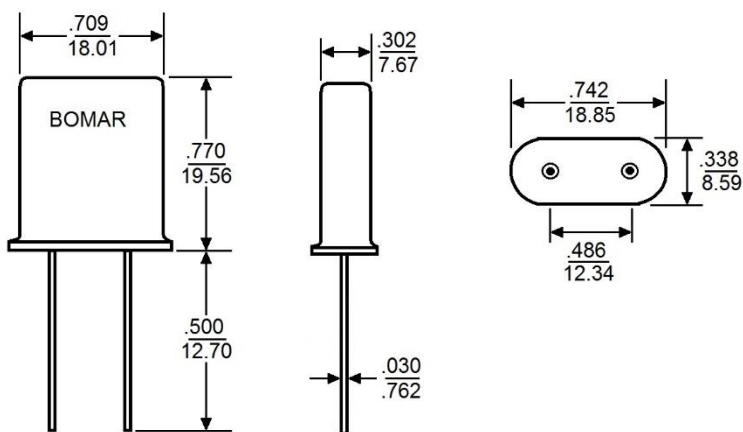

Part Numbering

Sample BC11EFD120-1.843200

Series	Tolerance @ 25°C.	Stability over Temp. Range	Temperature Range	Mode	Load Capacitance	Options	Frequency (kHz/MHz)
BC11	E = 30ppm	E = 30ppm	A = 0° to +70°C.	1	Actual	A = Grnd lead	Actual
	F = 50ppm	F = 50ppm	D = -20° to +70°C.		Load or		Frequency
	G = 100ppm	G = 100ppm	I = -40° to +85°C.		Series		

Call us for additional options

PO BOX 10, MIDDLESEX, NEW JERSEY 08846-0010 TEL. 732-356-7787

www.bomarcystal.com sales@bomarcystal.com