Notes:
1. Buildings are 40m x 70m
2. Grid is 10m x 10m

A — 8 persons seated
40 13A sockets
20 TO CAT6

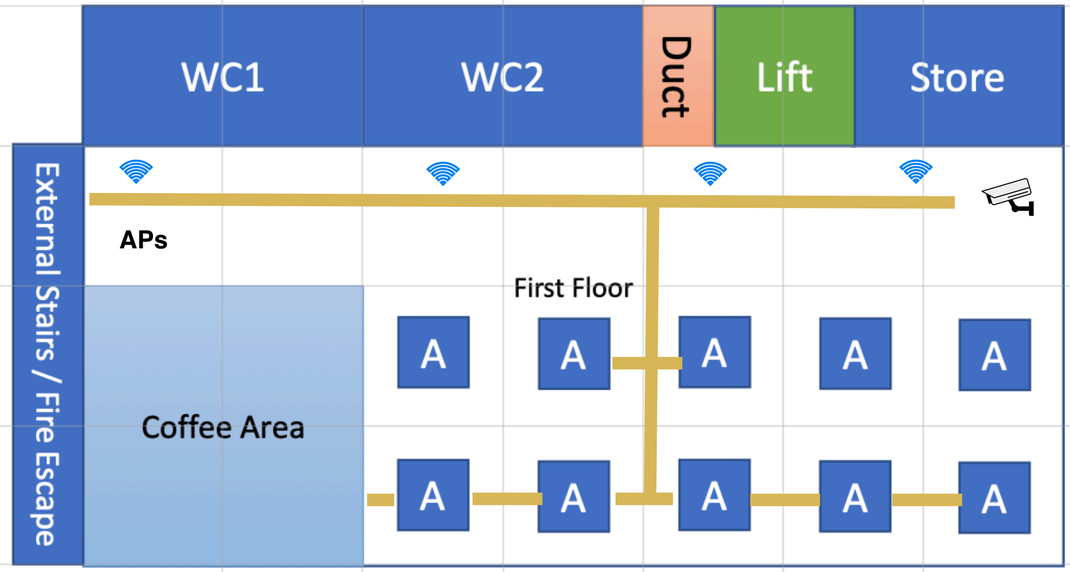

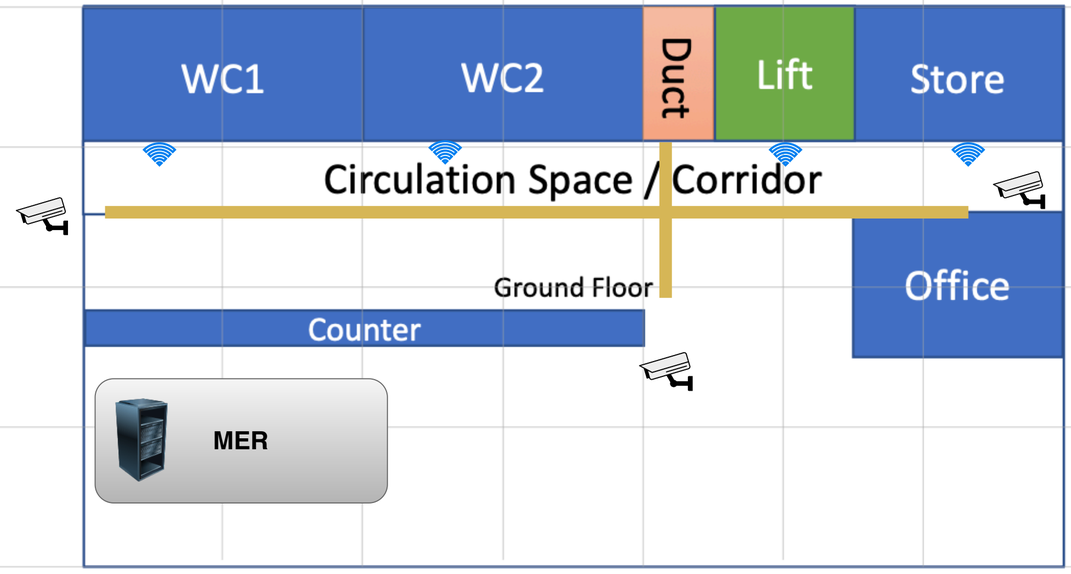

Notes:

1. All ICT cabling is Cat6.
2. Overhead cable tray and ladder containment is used for horizontal distribution.
3. Vertical duct provides inter-floor cable routing between ground and first floor.
4. Network services terminate at the MER located on the ground floor within the office,
5. Wireless coverage is provided by ceiling mounted access points (APs).
6. CCTV cameras to provide coverage to counter, circulation amnd public seatng areas.

Symbols

Cable Tray

Ladder Style overhead

A - Seating/workstation zone (8 persons).

APs - Ceiling mounted wireless access point.

CCTV - Security Camera.

MER - Main Equipment Room