

ZED-X

PRODUCT SPECIFICATION

Version 1.4


15/05/2023

Version History

Version #	Implemented By	Revision Date	Approved By	Approval Date	Reason
1.0	OB	20/08/2022	Stereolabs	20/08/2022	Initial Document
1.1	OB	23/09/2022	Stereolabs	23/09/2022	Improve Diagram
1.2	OB	23/01/2023	Stereolabs	23/01/2023	Fix Typo
1.3	LG	13/03/2023	Stereolabs	14/03/2023	Fix I2C addresses
1.4	OB	15/05/2023	Stereolabs	15/05/2023	Add eeprom address / Fix JP


Overview

CONFIDENTIAL / UNDER NDA

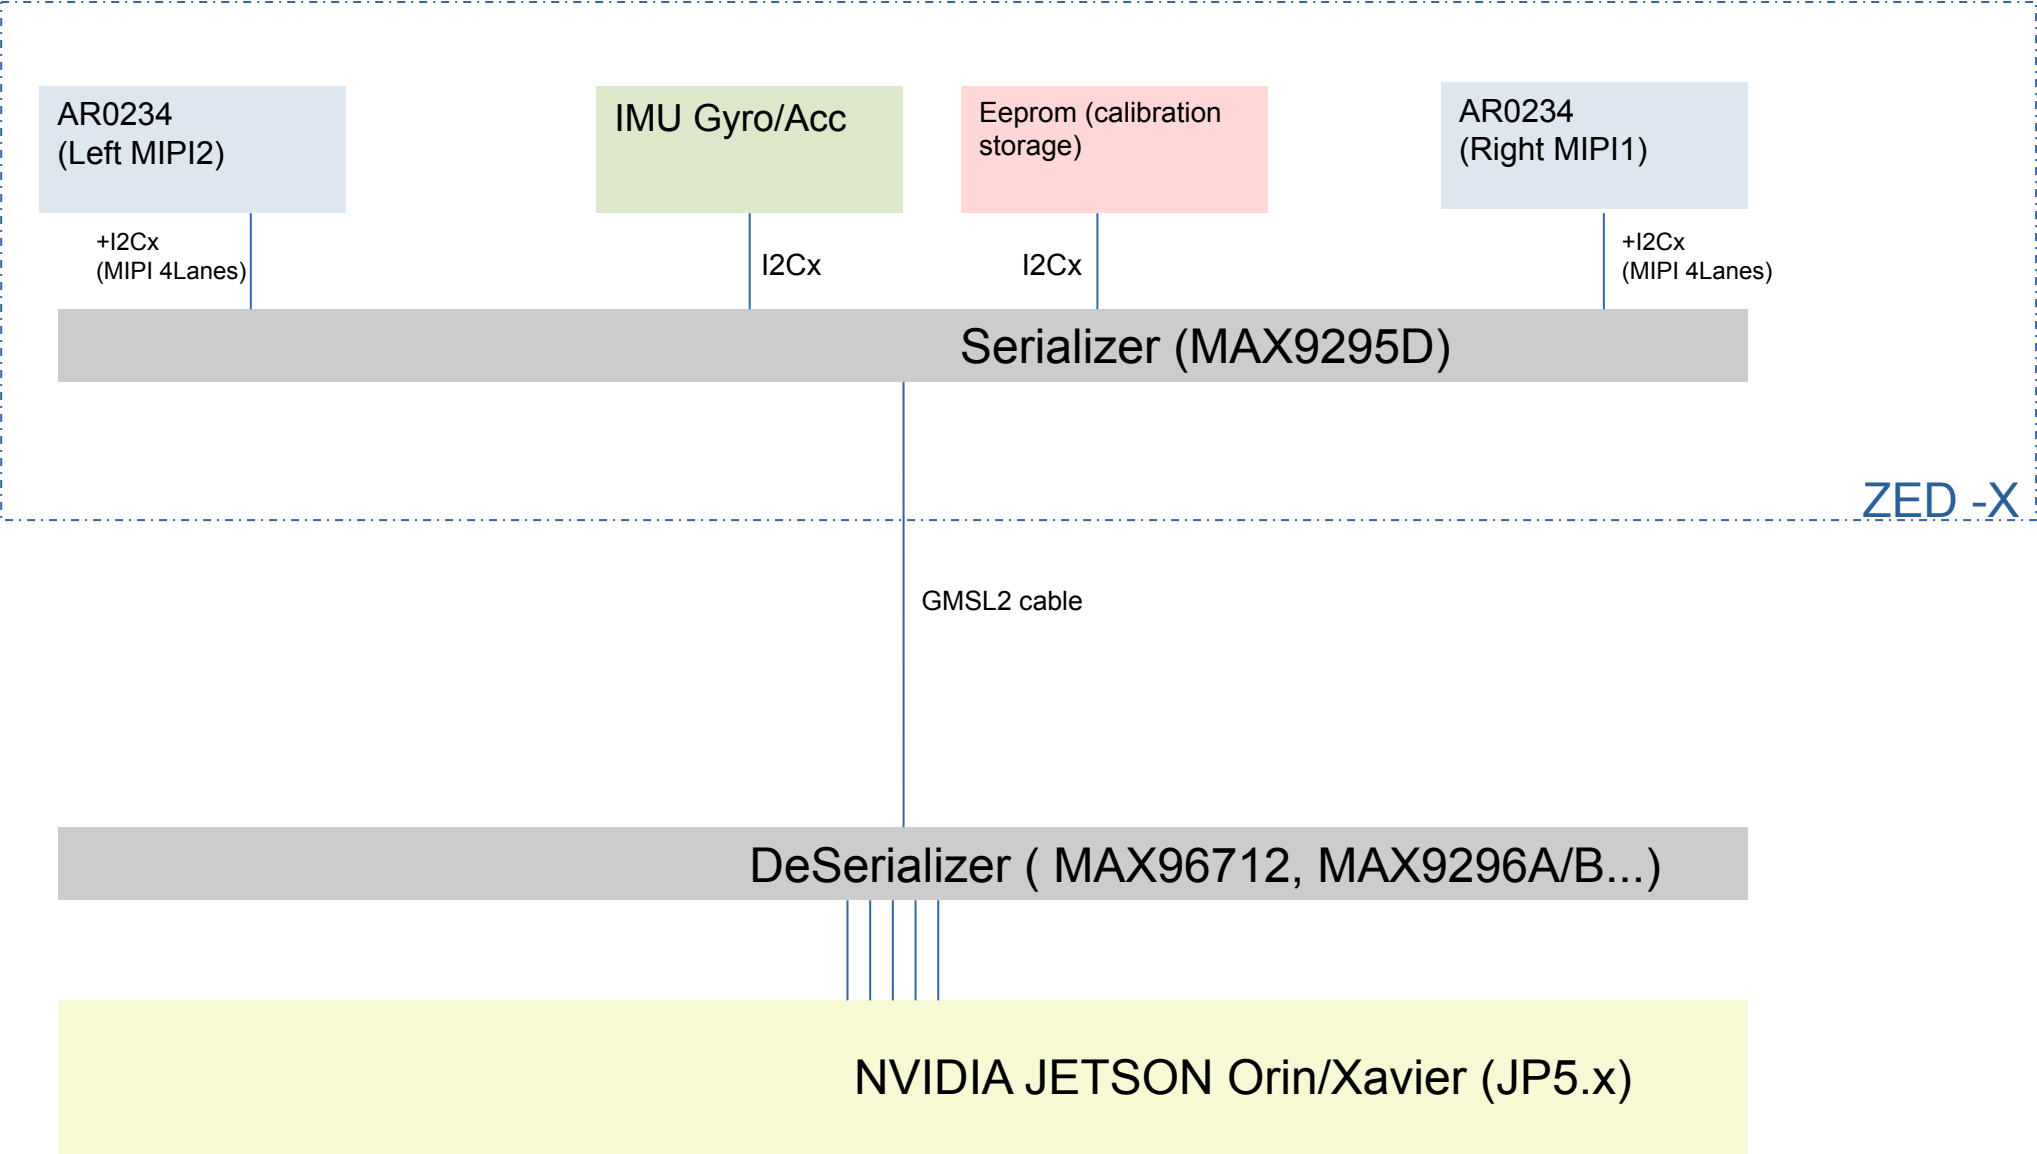

Block Diagram

CONFIDENTIAL / UNDER NDA

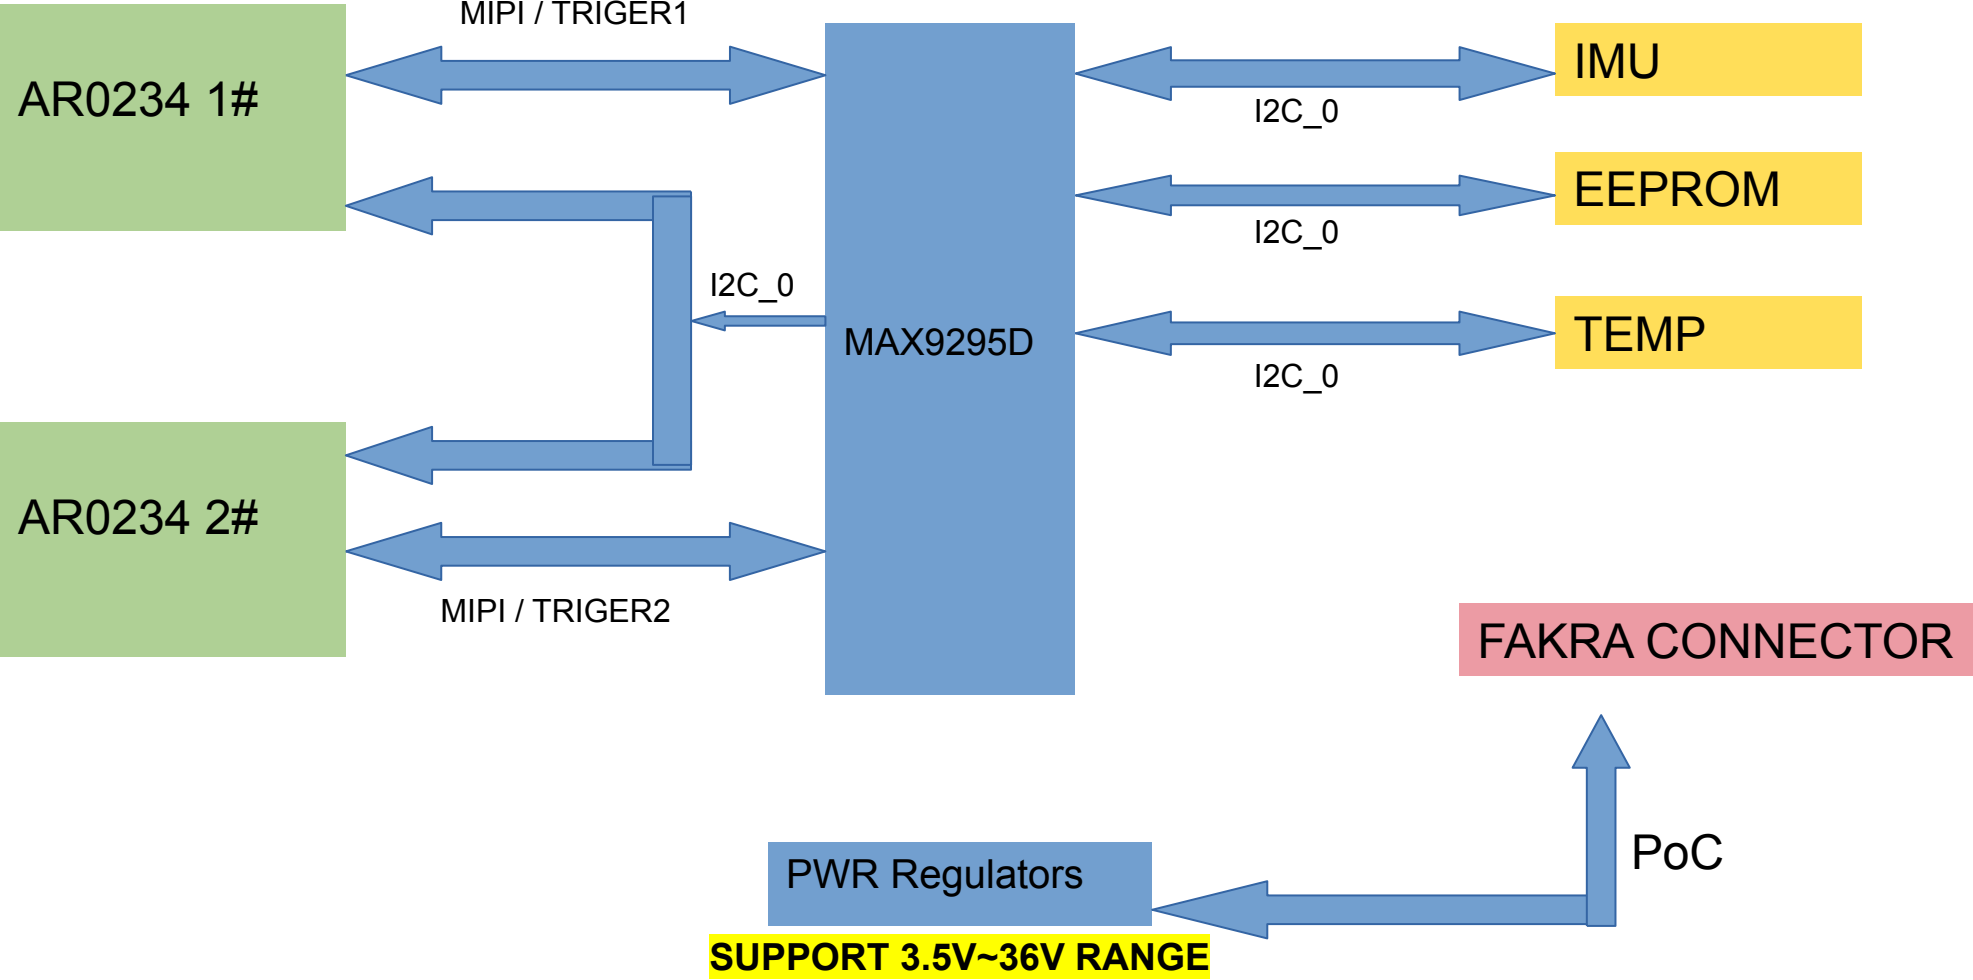

Components	ZED-X EP150	ZED-X	ZED-X-Mini
MAX9295D (serializer)	0x40	0x62	0x62
IMAGE 1	0x18	0x18	0x18
IMAGE 2	0x10	0x10	0x10
IMU Gyro	0x69	0x69	0x69
IMU Acc	0x19	0x19	0x19
EEprom (contains SN/calibrations...)	0x54,0x55	0x54,0x55	0x54,0x55

- For space constraints, Imaging sensors are mounted flip/flop. Driver needs to handle flip/flop in sensors *readmode* configuration :
Register : 0x3040 , Value = 0xC000
- Eeprom is directly handled in SDK (no need to specify i2c-add in DTS)
- Currently, IMU is handled the same way but this might change in future version. It is recommended to specify the i2c-add in DTS.
- For routing constraints, Right sensor is connected to MIPI1 and Left to MIPI2 which leads to L/R inversion. The inversion is directly handled in SDK so that no modifications on GMSL Deser Pipes are required.
- Driver support/Diff for MAX9296A/B (1 camera) and MAX96712 (multiple cameras)