


- ✓ Adjust size 24 ratio to 15
- Increase roundness on PIC pads?
- ✓ Check label orientation on bottom
- ✓ Add orientation marks for LEDs DS*
- ✓ Shorten PGB LED pin pads and make RXB larger (EXB-24)
- Positional markers for U1, U2, and U23
- U17 label size vs U34
- large pad [LP] package
- Orientation lines for 0402s?
- PIC pin one marker sizes
- Change D4 to HS52P* [microSMP] or maybe remove again?
- ✓ Make CXY just Cnn?

Precision resistors 00/UU

- RR0510P-5111-D [5k11 0.5% 25ppm/C]
- RR0510P-472-D [4k7 0.5% 25ppm/C]
- RR0510P-2492-D [24k9 0.5% 25ppm/C]
- ERJ2RKD2403X [240k 0.5% 100ppm/C]

Prebiased bipolar transistor ...

- DDTC123JLP-7 2.2k/47k
- DDTC143ZLP-7 4.7k/47k
- DDTC114YLP-7 10k/47k
- DDTC113TLP-7 1k/inf
- PDTC143M,315 4k7/47k
- PDTC114TM,315 10k/inf

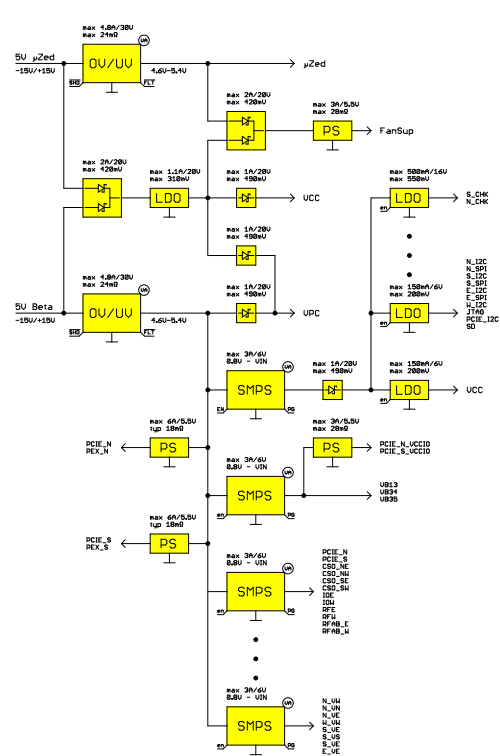

00/UU Resistors 0.5%

