Begin your response to **QUESTION 3** on this page.

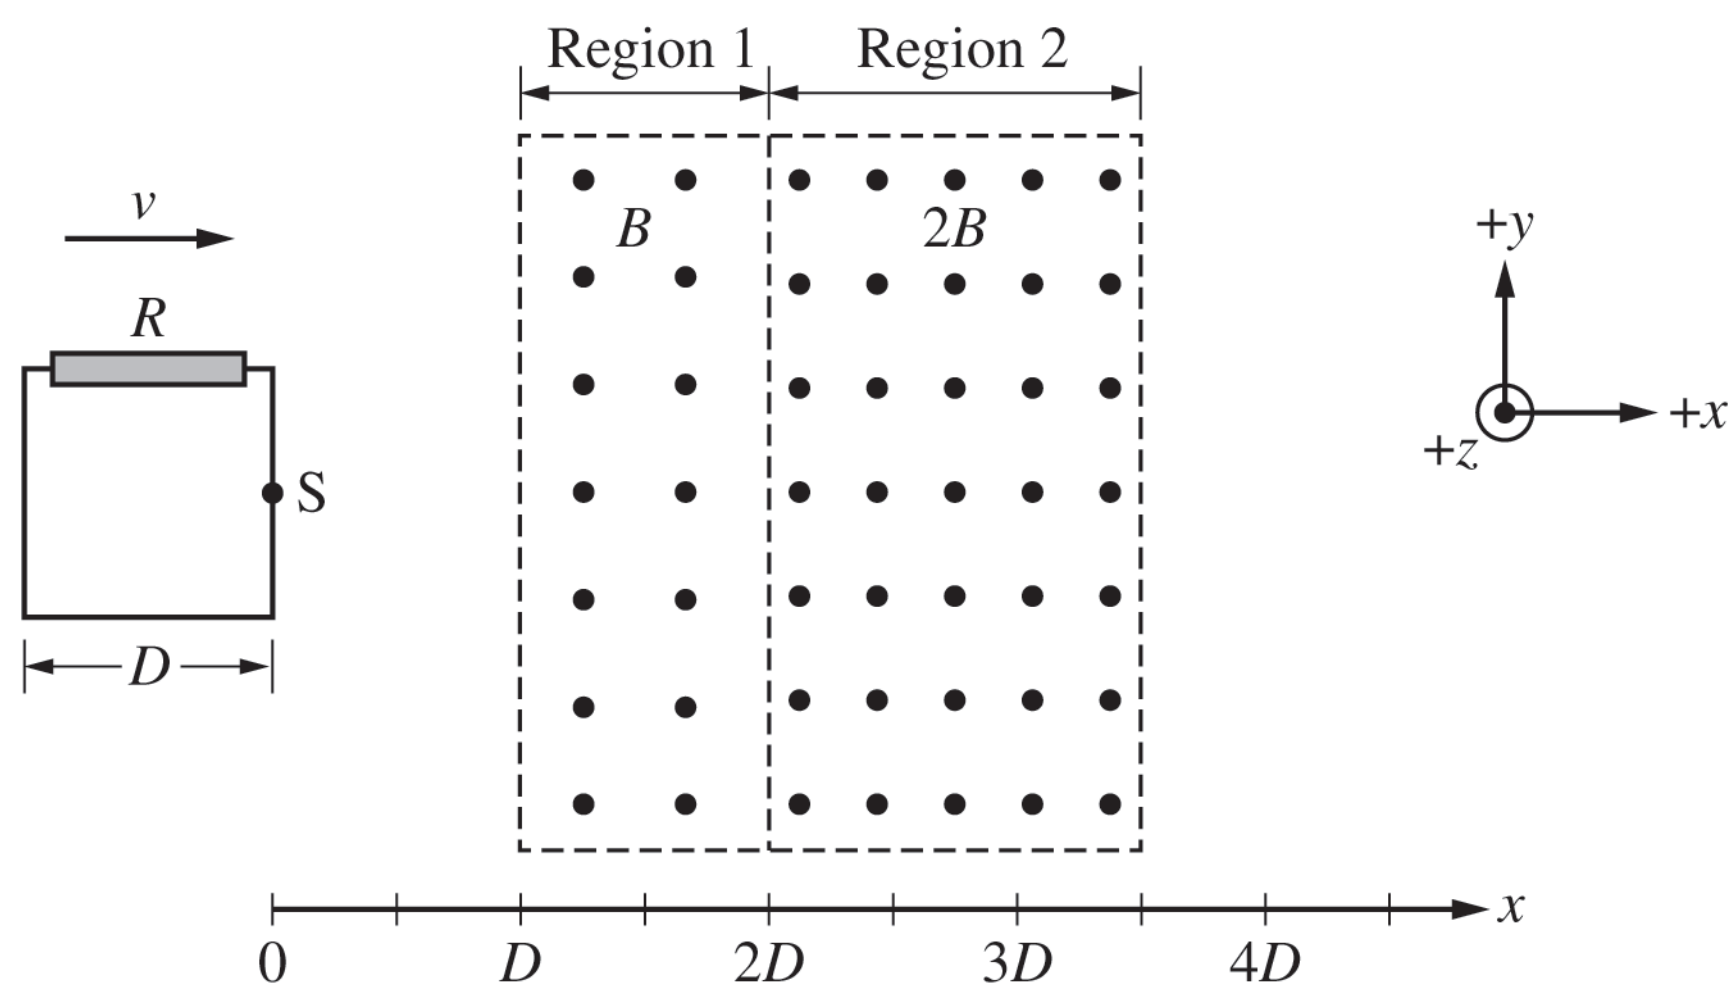

Figure 1

3. A wire is connected to a resistor of resistance R to form a rigid square loop of side length D. An external force is exerted on the loop so that the loop always moves with constant speed v in the $+x$ direction, as shown in Figure 1. The loop then enters Region 1 of external uniform magnetic field of magnitude B that is directed in the $+z$-direction. Region 1 has boundaries $x = D$ and $x = 2D$. The loop later enters Region 2 of external uniform magnetic field of magnitude $2B$ that is directed in the $+z$-direction. Region 2 has boundaries $x = 2D$ and $x = 3.5D$. Point S is the midpoint of the leading edge of the loop.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

(a) On the following axes, **sketch** a graph of the magnetic flux Φ through the square loop as a function of the position x of Point S from $x = 0$ to $x = 4.5D$. The $+z$-direction indicated in Figure 1 corresponds to $+\Phi$.

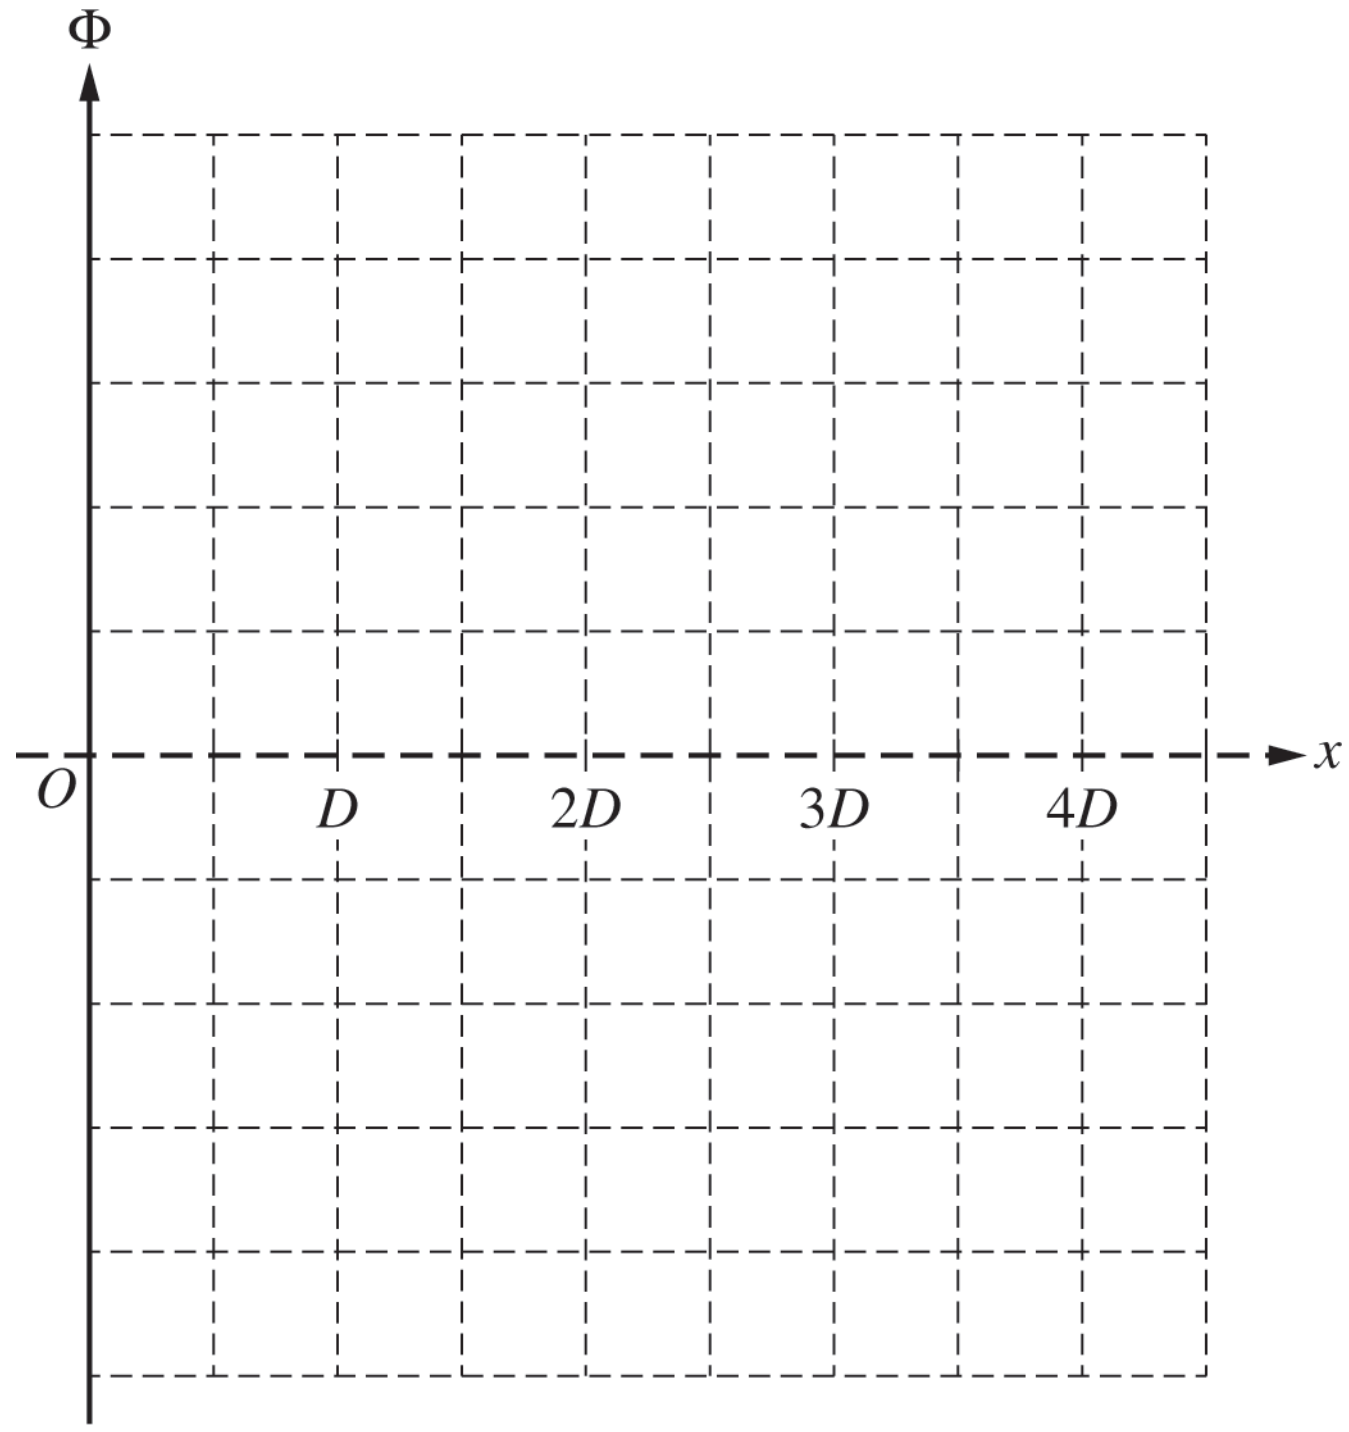

(b) Consider the instant when Point S reaches $x = 1.5D$.

i. **Indicate** whether the current I_S that is induced in the square loop when Point S reaches $x = 1.5D$ is clockwise, counterclockwise, or zero.

_____ Clockwise _____ Counterclockwise _____ Zero

Briefly **justify** your answer.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

ii. **Derive** an expression for I_S when Point S reaches $x = 1.5D$. If $I_S = 0$, indicate how the derived expression shows that $I_S = 0$. Express your answer in terms of R, D, v, B, and physical constants, as appropriate.

iii. **Derive** an expression for the power P dissipated by the resistor when Point S reaches $x = 1.5D$. Express your answer in terms of R, D, v, B, and physical constants, as appropriate.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

The total energy dissipated by the resistor in the square loop as Point S moves from $x = 0$ to $x = 4.5D$ is $E_{original}$.

The vertical boundary between regions 1 and 2 is now shifted to $x = 2.5D$. After the boundary is shifted, the square loop again moves with speed v in the $+x$-direction, as shown in Figure 2. The total energy dissipated by the resistor as Point S moves from $x = 0$ to $x = 4.5D$ is E_{new}.

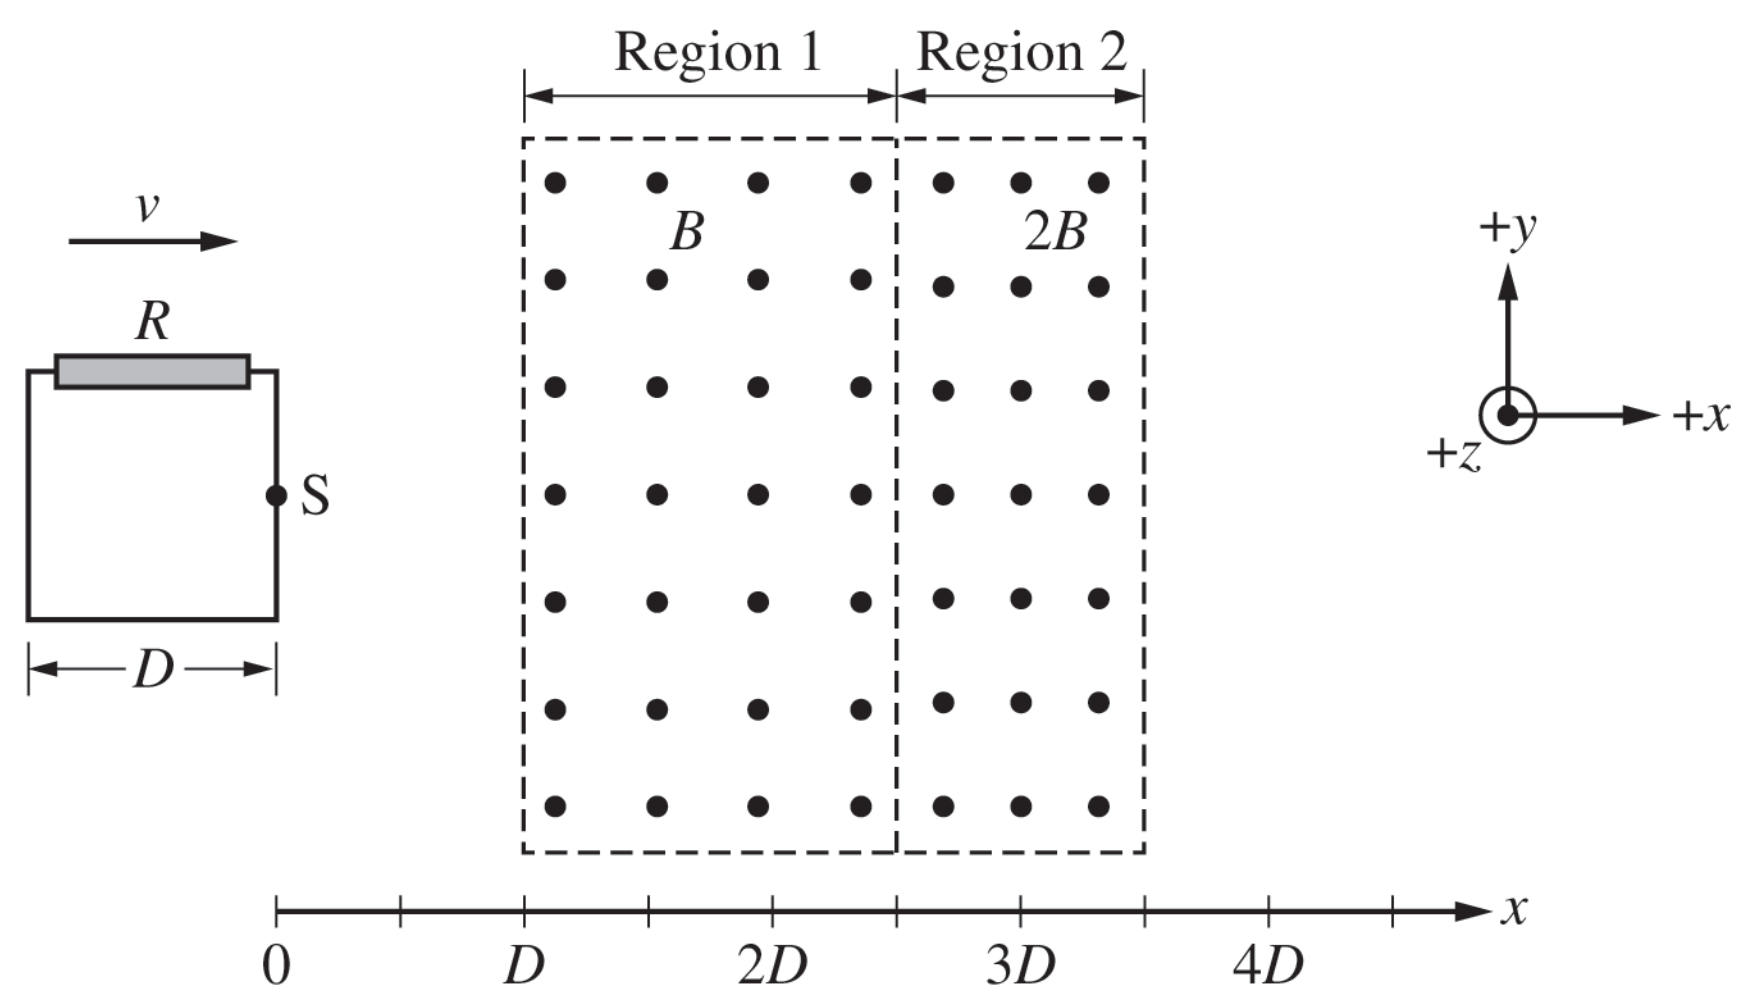

Figure 2

(c) **Indicate** whether E_{new} is greater than, less than, or equal to $E_{original}$.

______ $E_{new} > E_{original}$ ______ $E_{new} < E_{original}$ ______ $E_{new} = E_{original}$

Briefly **justify** your answer.

GO ON TO THE NEXT PAGE.

Continue your response to **QUESTION 3** on this page.

The original magnetic fields are modified so that the region $D < x < 3.5D$ contains an external uniform magnetic field of magnitude B that is directed in the $+z$-direction.

A new wire is connected to a resistor of resistance R to form a rigid triangular loop with base length D and height D. An external force is exerted on the loop so that the loop always moves with speed v in the $+x$-direction, as shown in Figure 3. Point S represents the upper-leading corner of the loop.

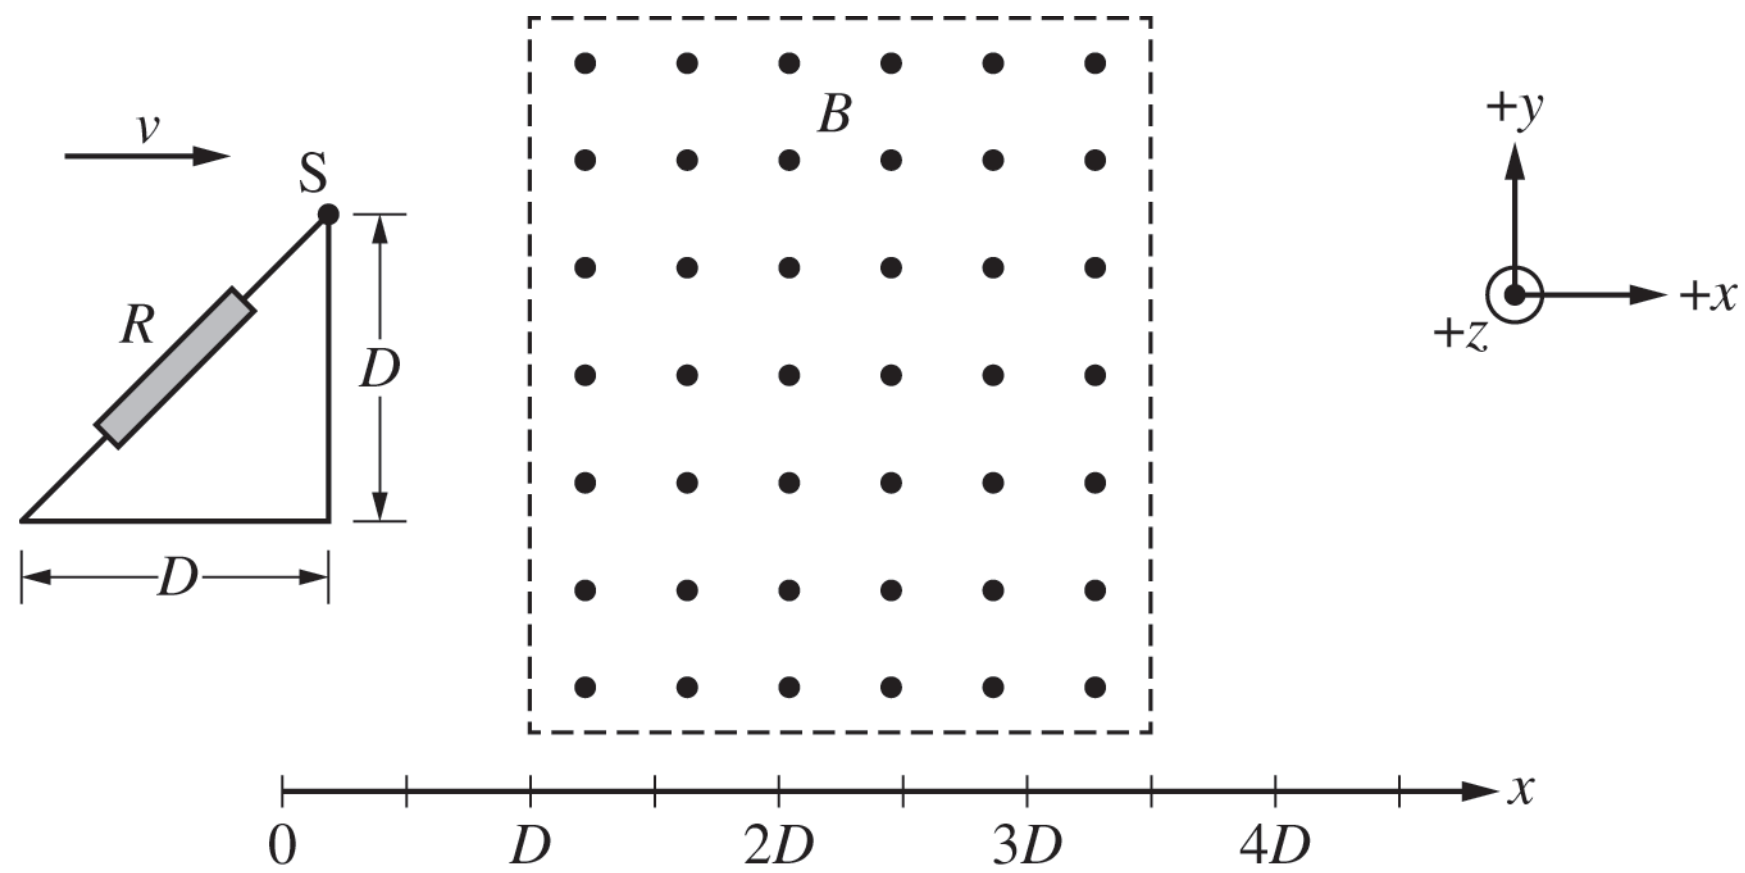

Figure 3

(d) On the following axes, **sketch** a graph of the induced current I_T in the loop as Point S moves from $x = D$ to $x = 3D$.

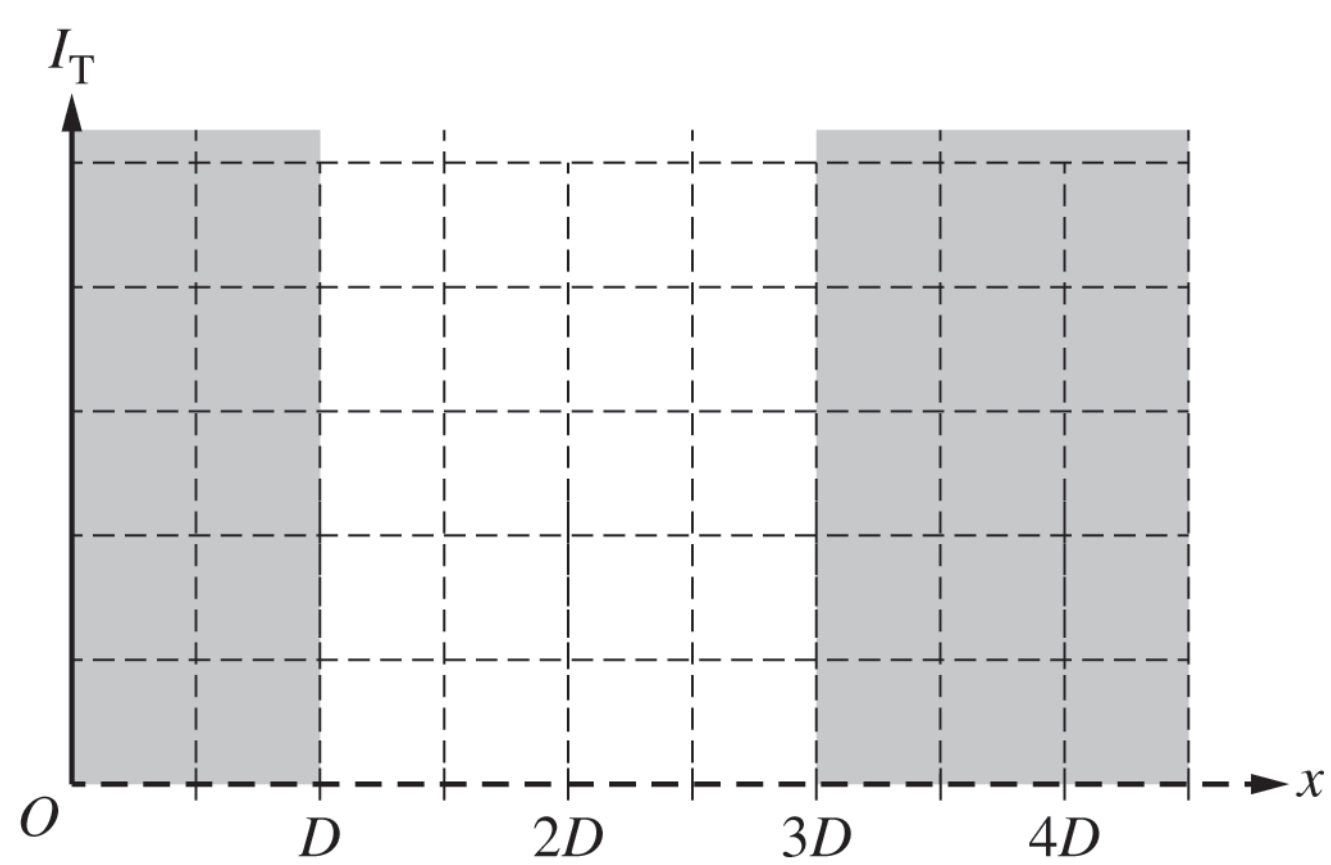

GO ON TO THE NEXT PAGE.