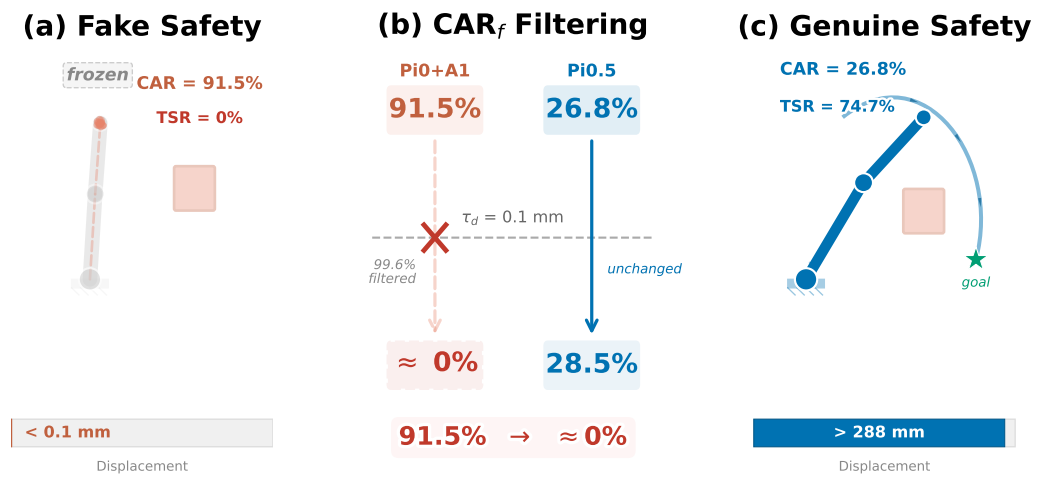
(a) Fake Safety
frozen
CAR = 91.5%
TSR = 0%
< 0.1 mm
Displacement
(b) CAR$_f$ Filtering
Pi0+A1
Pi0.5
91.5%
26.8%
τ_d = 0.1 mm
99.6% filtered
unchanged
≈ 0%
28.5%
91.5% → ≈ 0%
(c) Genuine Safety
CAR = 26.8%
TSR = 74.7%
goal
> 288 mm
Displacement