


Analysis Report


Configuration Summary

Shot No: 1275
Mode: m / T
Duration: 97.94 ms
IP Max: 108.20 kA

Time-Frequency Analysis

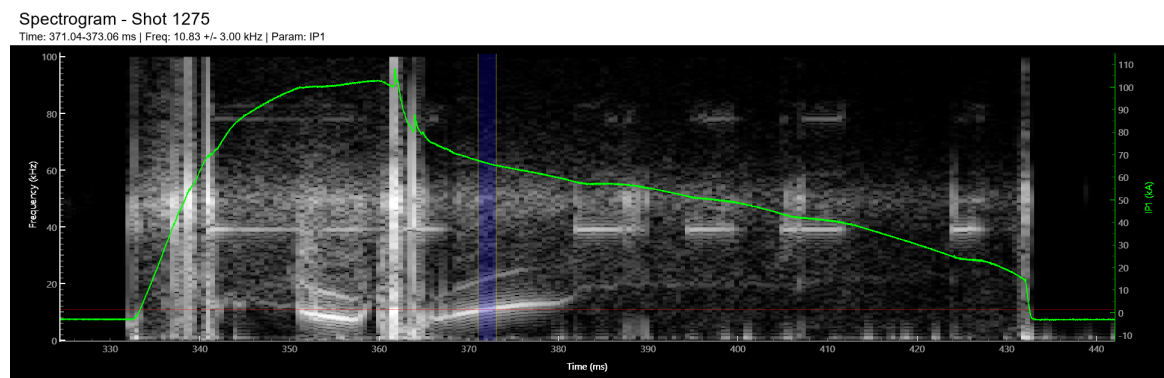


Time: 371.04-373.06 ms | Freq: 10.83 +/- 3.00 kHz | Param: IP1

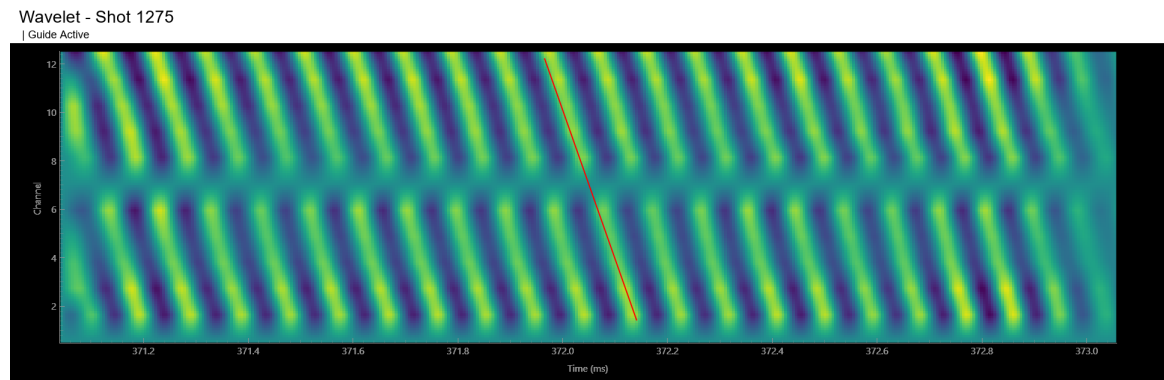


| Guide Active

Phase Difference Analysis

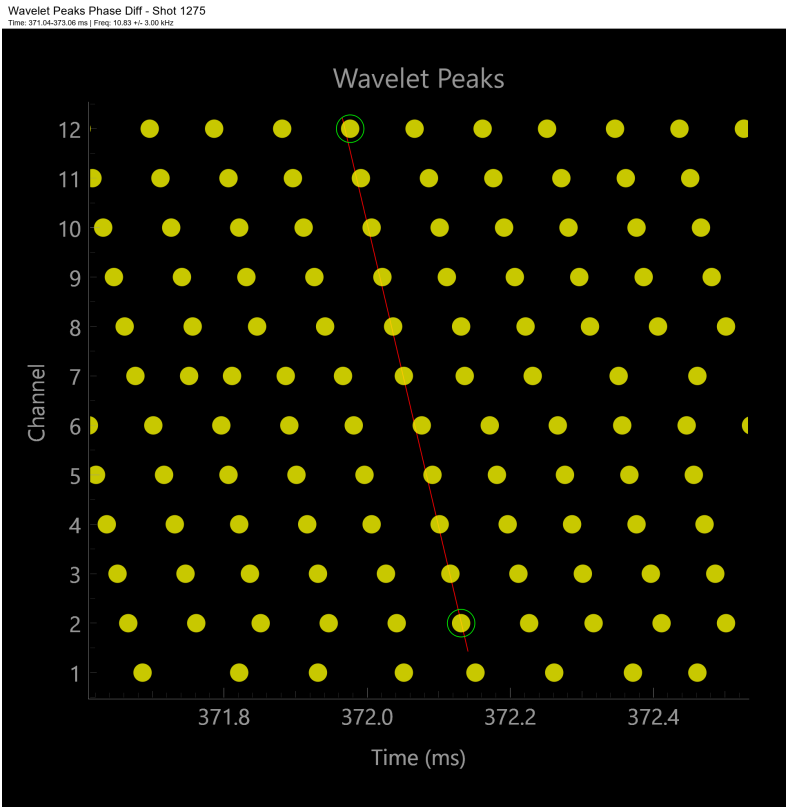


Time: 371.04-373.06 ms | Freq: 10.83 +/- 3.00 kHz

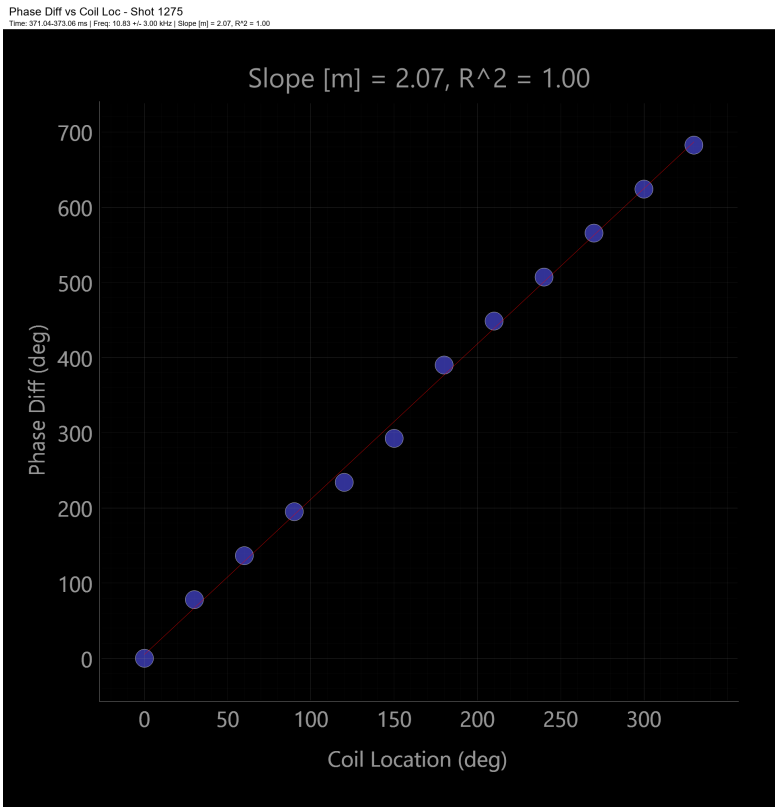


Time: 371.04-373.06 ms | Freq: 10.83 +/- 3.00 kHz | Slope [m] = 2.07, R² = 1.00

Phase Cycle Analysis

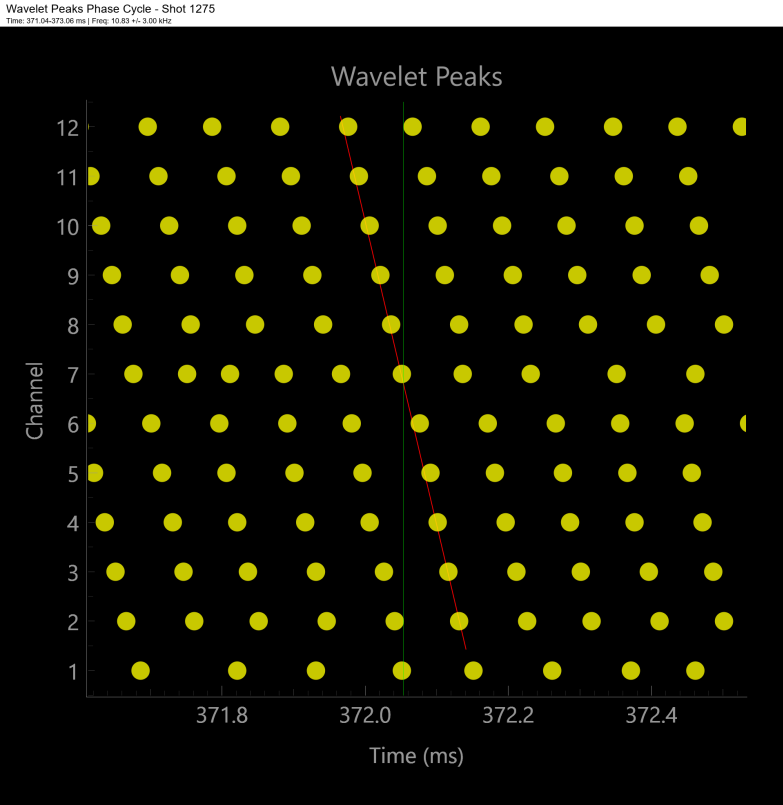


Time: 371.04-373.06 ms | Freq: 10.83 +/- 3.00 kHz

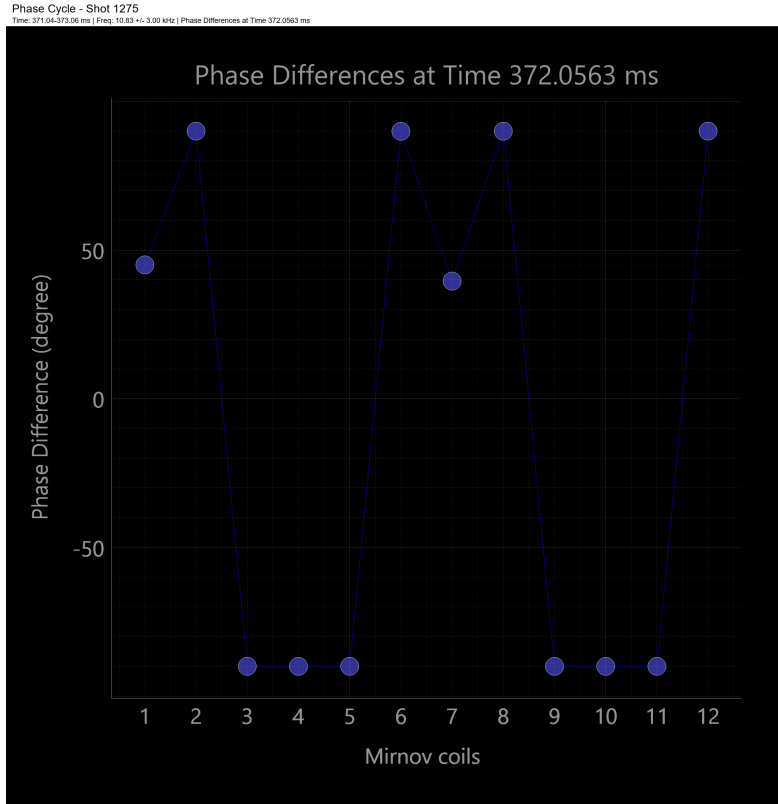


Time: 371.04-373.06 ms | Freq: 10.83 +/- 3.00 kHz | Phase Differences at Time 372.0563 ms

SVD & Spatial Structure

Singular Values - Shot 1275

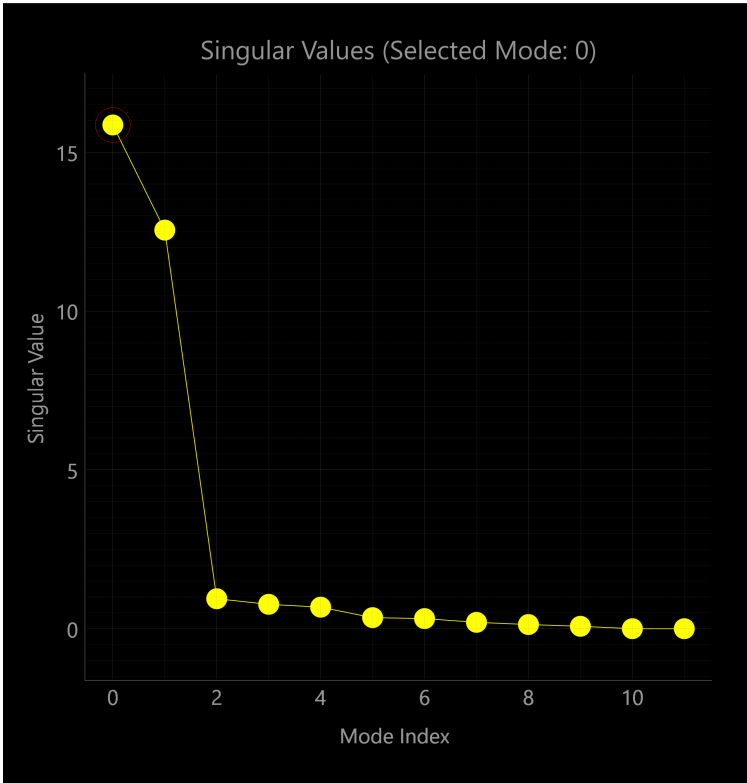

Spatial Structure - Shot 1275

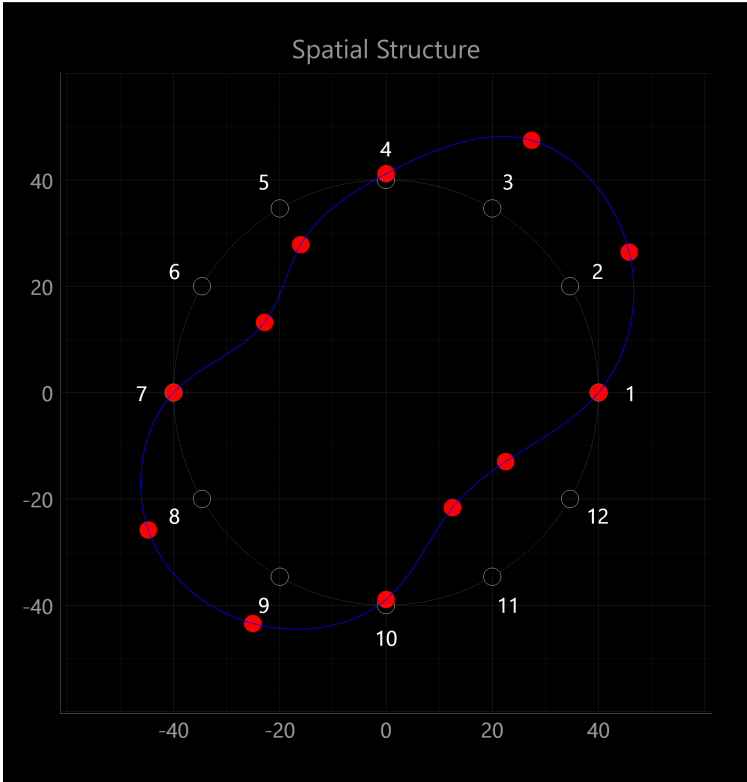

Parameter Configuration

Init Phase Table - Shot 1275

Channel	Value
CH1	0.01
CH7	0.03
CH9	0.05

Amp Signal Table - Shot 1275

Channel	Value
-	0.00