



PROCESS	
S/R No.: RE22CP6◎◎	
0081	TURNING
7001	HEAT TREAT
1021	FACE GRIND
1041	SPHERICAL GRIND
1061	ID GRIND①
8011	COMPONENT INSPECT
1901	TUMBLE
3841	P-DRY FILM ②
8012	COMPONENT INSPECT(2)
8601	STOCK

REV	DATE	ECN·DCN No.	BY	CHK
C	07.10.02	DCNA7328,ECN0766&0779	佐藤	太田
D	13.01.24	DCNB1446,ECN0844	塩川	寺内
E	13.10.03	ECN0835/DCNB3427	橋本	柴田
F	15.04.21	DCNB5206	塩川	山口
G	18.03.05	DCNB8002	山崎	山口
H	19.11.20	DCN100210	塩川	部谷

TURNING 3.2/▽

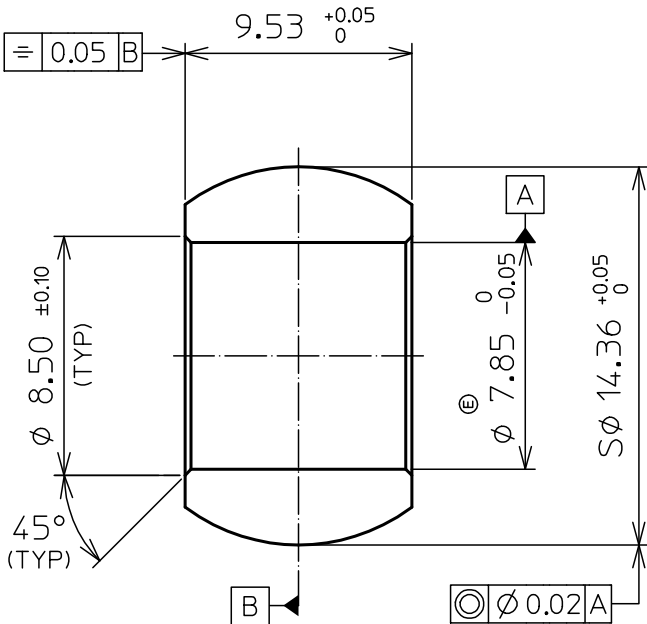

FINISH

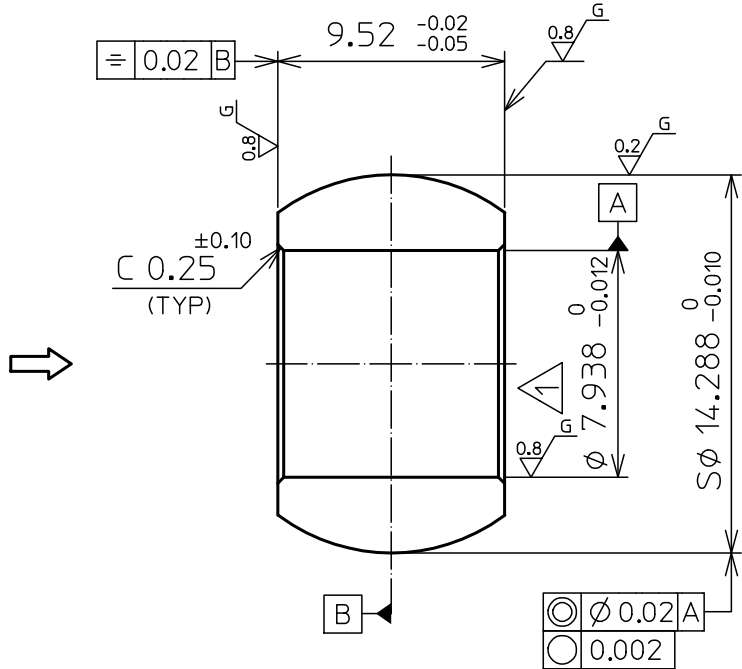

FINISH	RE 422C2 ② ◎◎◎
PASSIVATION S=7.44cm ² AMS2700 METHOD 1 TYPE2 Class1 Copper Sulfate Test	
FINISH	RE 44932 ◎
DRY FILM (I.D ONLY) EVERLUBE 620 BAC5811 Ty VIII THICKNESS : 3~7 μm	
NON-DESTRUCTIVE TEST	RE ◎
//	

- ①. DIMENSION APPLY BEFORE DRY FILM.
(AFTER DRYFILM I.D SHALL BE : $\phi 7.938 \begin{smallmatrix} -0.006 \\ -0.026 \end{smallmatrix}$)
- ②. FILL OUT PROCESS RECORDS FOR PASSIVATION.

MATERIAL	RP 21102
	440C
	AMS5630/AMS-QQ-S-763
HEAT TREATMENT	RE 41003
	55-60HRC
	AMS-H-6875,APS-102

A	ISSUED STAMP :

DRAWN	津田
	88-09-16
CHECKED	藤野
	88-09-27

NMB Rodend-Fastener B/U Rodend ENG Division	
TITLE	
◎ ABG5-5-2-T	
BALL MANUFACTURING DRAWING	
DRAWING NO.	REV
231-0165-04	H